Common features

- Instant ejection of relay by plastic retaining clip
- Integral coil indication and protection circuit
- 35 mm rail (EN 60715) mounting

EMR Electromechanical Relays

SSR Solid State Relays

6.2 mm wide

- **EMR - DC, AC or AC/DC coil versions**
- **SSR - DC or AC/DC input versions**
- Screw and Screwless terminal options

38.51/38.61

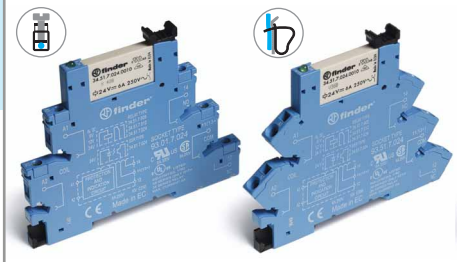

- **1 CO - 6 A 250VAC**

Page 1

38.81/38.91

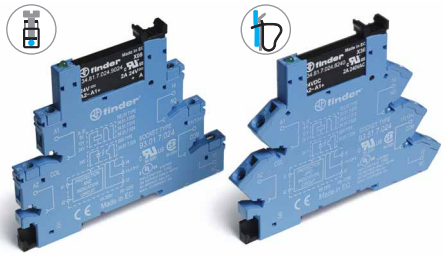

- Single solid state output:
  Options **0.1A 48VDC, 2A 24VDC, 2A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 2

6.2 mm wide

- **Special coil / input leakage current suppression types**
- **EMR - AC or AC/DC coil versions**
- **SSR - AC or AC/DC input versions**
- Screw and Screwless terminal options

38.51.3... - 38.61.3...

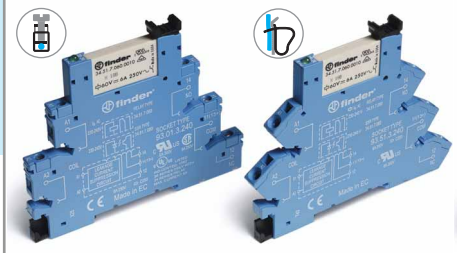

- **1 CO - 6 A 250VAC**

Page 1

38.81.3... - 38.91.3...

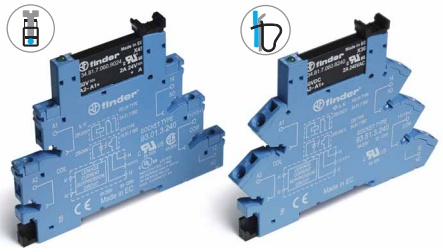

- Single solid state output:
  Options **0.1A 48VDC, 2A 24VDC, 2A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 2

6.2 mm wide

- **Timed Interface module**
- **4 functions & 4 time scales 0.1s ... 6h**
- **EMR - AC/DC (12 or 24V) supply versions**
- **SSR - AC/DC (24V) supply**
- Screw terminals

38.21

- **1 CO - 6 A 250VAC**

Page 3

38.21...9024-8240

- Single solid state output:
  Options **2A 24VDC, 2A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 3

14 mm wide

- **2 pole 8 A or 1 pole 16 A**
- **EMR - DC or AC/DC coil versions**
- **SSR - DC input versions**
- Screw and Screwless terminal options

38.01/38.52/38.11/38.62

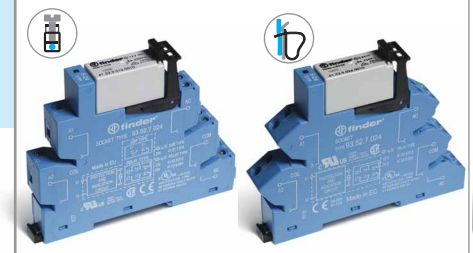

- **1 CO - 16 A 250VAC**
- **2 CO - 8 A 250VAC**

Page 4

38.31/38.41

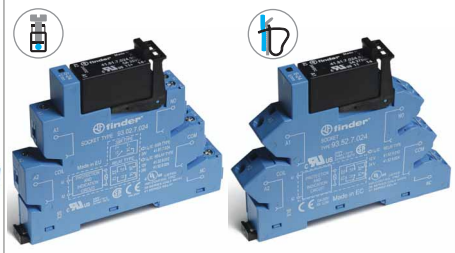

- Single solid state output:
  Options **5A 24VDC, 3A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 5