

**Specification Status: Released**

**Max Electrical Rating at 25°C**


**Max Voltage: 0.5A-2A 63V<sub>DC</sub>, 2.5A-5A 32V<sub>DC</sub>,  
6A-8A 24V<sub>DC</sub>**

**Max Interrupt Current at Rated Voltage:  
50A for 0.5A-3A  
45A for 4A-8A**

Termination Material: Silver, Nickel, Tin

Fuse Element: Silver

Body Material: Glass Ceramic

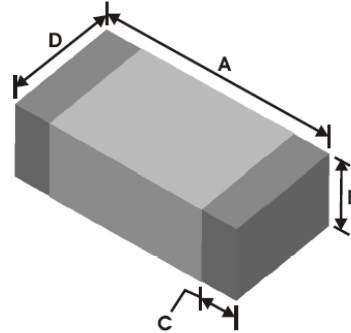

**Clear Time Characteristics**

% of current rating	Clear time at 25°C
100%	4 hours min.
250%	5 seconds max.
400%	0.05 seconds max.

**Dimensions**

	A		B		C		D	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	3.00	3.40	0.90	1.30	0.26	0.76	1.40	1.80
in:	0.118	0.134	0.035	0.051	0.010	0.030	0.055	0.071

Part Number	Current Rating (A)	Voltage Rating (VDC)	Nominal Cold DCR (Ω)*
1206SFF050F/63	0.5	63	0.730
1206SFF075F/63	0.75	63	0.513
1206SFF100F/63	1.0	63	0.220
1206SFF150F/63	1.5	63	0.120
1206SFF175F/63	1.75	63	0.100
1206SFF200F/63	2.0	63	0.050
1206SFF250F/32	2.5	32	0.035
1206SFF300F/32	3.0	32	0.031
1206SFF400F/32	4.0	32	0.022
1206SFF500F/32	5.0	32	0.015
1206SFF600F/24	6.0	24	0.013
1206SFF700F/24	7.0	24	0.011
1206SFF800F/24	8.0	24	0.008

\* Measured at 10% of rated current and 25°C

Agency Recognition: UL E197536  
Precedence: This specification takes precedence over documents referenced herein.  
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

**Materials Information**

ROHS Compliant

Directive 2002/95/EC  
Compliant

ELV Compliant


Directive 2000/53/EC  
Compliant

Halogen Free\*




\* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm

**Average Clear-Time Curves**

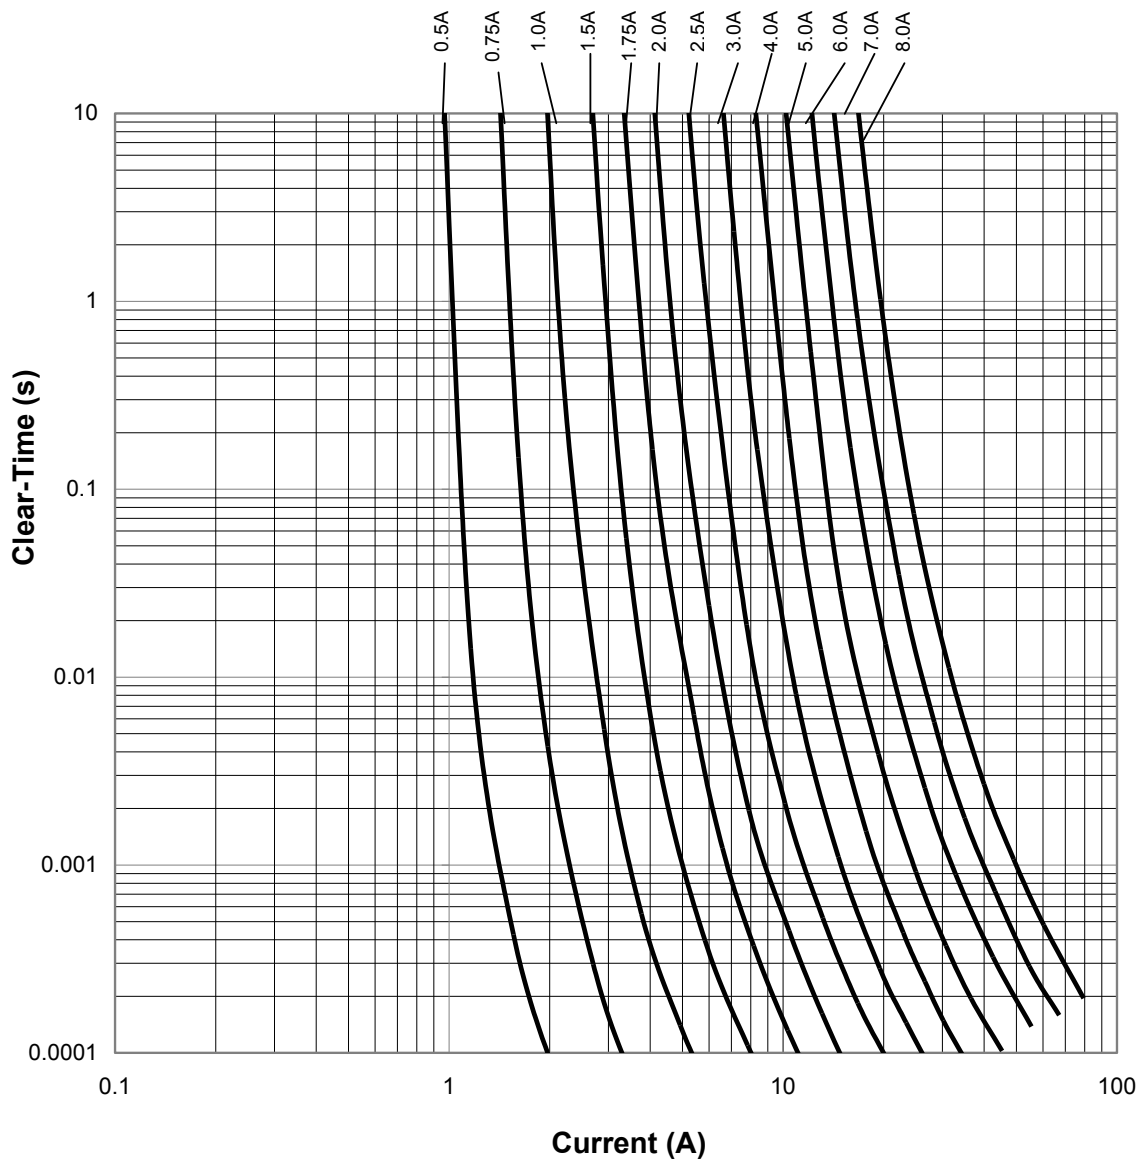

**Nominal  $I^2 t$  vs  $t$  Curves**

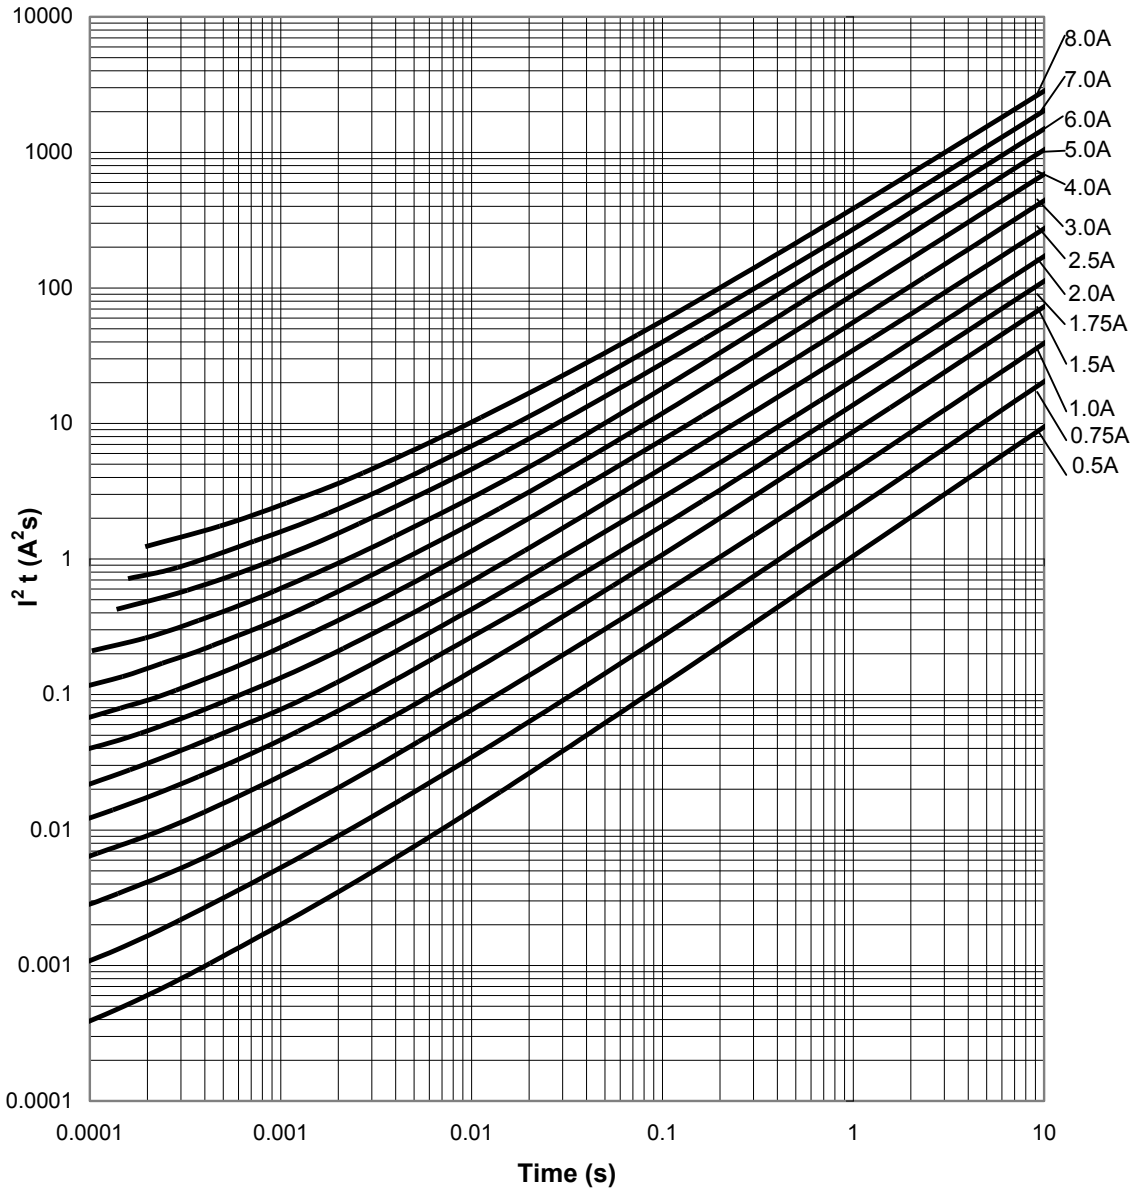

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining, nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.