

Features

- Miniature Thermal Cutoff (TCO) device
- Smallest body size in product family
- Overtemperature and overcurrent protection for lithium polymer and prismatic cells
- Controls abnormal, excessive current virtually instantaneously, up to rated limits
- Wide range of temperature options
- High corrosion resistance withstand

Applications

- Battery cell protection for:
- Notebook PCs
 - Tablet PCs
 - Smart phones

CB Series Breaker (Thermal Cutoff Device)

Ratings

| Specification | A-TYPE | | | |
|--------------------------|---------------------------|------------------|------------------|------------------|
| | CB72ABB, CB72A1B | CB77ABB, CB77A1B | CB82ABB, CB82A1B | CB85ABB, CB85A1B |
| Trip Temperature | 72 °C ± 5 °C | 77 °C ± 5 °C | 82 °C ± 5 °C | 85 °C ± 5 °C |
| Reset Temperature | 40 °C min. | | | |
| Maximum Breaking Current | DC5 V / 50 A, 100 cycles | | | |
| Maximum Voltage | DC28 V / 25 A, 100 cycles | | | |
| Minimum Holding Voltage | 3 V @ 25 °C for 1 minute | | | |
| Maximum Leakage Current | 200 mA max. @ 25 °C | | | |
| Resistance | 5 mΩ max. / 2.2 mΩ typ. | | | |


Mini-breaker TCOs reset when the following conditions are met:

- The ambient temperature has dropped by 10 °C below the minimum trip temperature; and
- Power to the TCO has been cycled (off/on)

Agency Recognition

| Description | |
|-------------|--|
| UL, cUL | File No. E215638 (UL60730) |
| TUV | (Pending) |

Product Structure

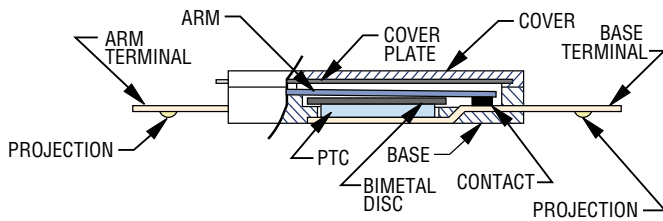

AVAILABLE WITH AND WITHOUT PROJECTIONS.

How to Order

CB 77 A B B

Series Designator _____

Trip Temperature (±5 °C) _____

- 72
- 77
- 82
- 85

Arm Material _____

A = Cu Alloy, High Current Type

Terminal Type _____


1 = With Projection

B = Without Projection

Body Color _____

B = Black

Circuit Diagram

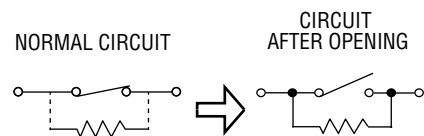

WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

* RoHS Directive 2015/863, Mar 31, 2015 and Annex.

** Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.


CB Series Breaker (Thermal Cutoff Device)



Product Dimensions

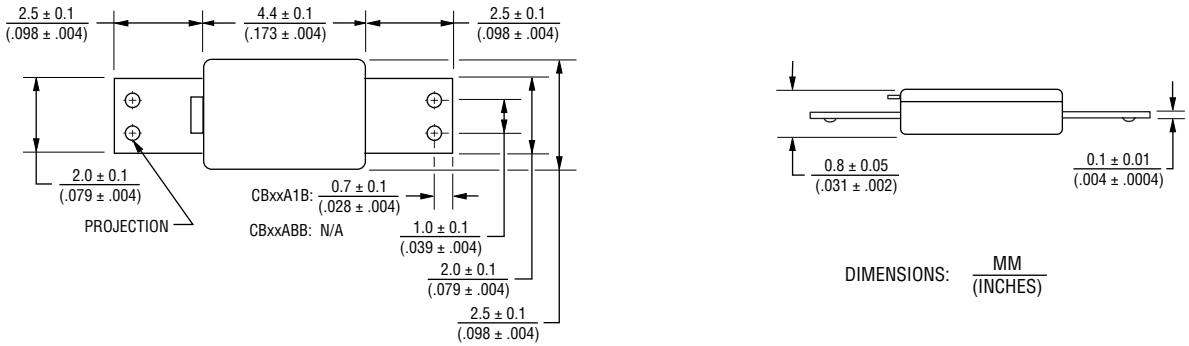

Typical Performance - Current vs. Temperature Curves

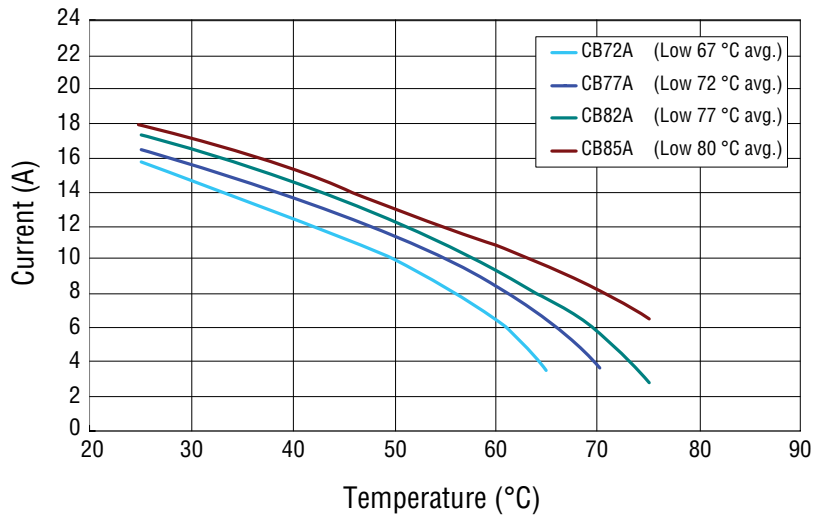

The above curves were derived from placing test samples in an oven at 25 °C, 40 °C, 60 °C and so on, increasing current flow through the sample at a rate of 0.1 A/minute and recording the current value when the sample trips.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.