


Current Probes

A621 • A622 Data Sheet



A621

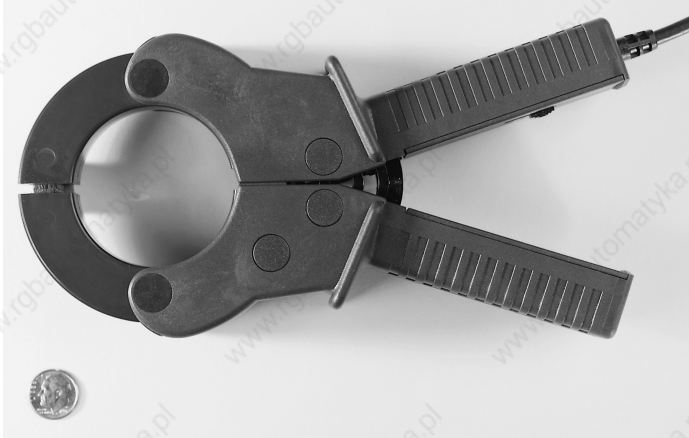

A622

Features & Benefits

A621

- AC – 5 Hz to 50 kHz
- 100 mA to 2000 A Peak
- For DMMs and Oscilloscopes
- Clamp On

A622

- AC/DC – 100 kHz
- 50 mA to 100 A Peak
- For DMMs and Oscilloscopes

Applications

- Motor Drives
- Inverters
- Power Supplies
- Avionics

The A600 Series current probes high-value current probes are specifically designed to support measurements you make with your TekMeter® or oscilloscope*1.

A621 2000 Amp AC Current Probe/BNC

This industrial-style clamp-on probe has a BNC connector and may be used with a shrouded banana plug adapter*1 so it can be used on digital multimeters, TekMeter, and scopes. The A621 can measure AC currents from 100 mA to 2000 A peak over a frequency range of 5 Hz to 50 kHz. It provides a 1 mV, 10 mV, or 100 mV output for each Amp measured.

A622 100 Amp AC/DC Current Probe/BNC

This "long nose" style clamp-on probe uses a Hall Effect current sensor to provide a voltage output to oscilloscopes. It has a BNC connector and may be used with a shrouded banana plug adapter*1 so it can also be used on digital multimeters, TekMeter, and scopes. The A622 can measure AC/DC currents from 50 mA to 100 A peak over a frequency range of DC to 100 kHz. It provides 10 mV or 100 mV output for each Amp measured.

Recommended Products

TPS2000, TDS1000B, TDS2000C, and TDS3000C Series oscilloscopes and DMM4020*1, DMM4040*1, and DMM4050*1 digital multimeters.

*1 For instruments with banana jack inputs, Tektronix part number 012-1450-00 Female BNC to banana lead adapter is required.

Characteristics

Characteristic	A621	A622
Frequency Range	5 Hz to 50 kHz	DC to 100 kHz
Max Input Current	2000 A peak	100 A peak
Output	1 mV/A, 10 mV/A, 100 mV/A	10 mV/A, 100 mV/A
Max Conductor Diameter	54 mm (2.13 in.)	11.8 mm (0.46 in.)
Termination	BNC*1	BNC*1
Max Bare-wire Voltage	600 V (CAT III)	600 V (CAT III)
Safety	UL3111-2-032 CSA1010.2.032 EN61010-2-032 IEC61010-2-032	UL3111-2-032 CSA1010.2.032 EN61010-2-032 IEC61010-2-032

*1 For instruments with banana jack inputs, Tektronix part number 012-1450-00 Female BNC to banana lead adapter is required.

Ordering Information

A621

2000 A AC Current Probe/BNC.

A622

100 A AC/DC Current Probe/BNC.

Service

Option	Description
Opt. R3	Repair Service 3 Years.
Opt. R5	Repair Service 5 Years.

Recommended Accessories

Accessory	Description
012-1450-xx	Adapter, lead; discrete – MLD, 2, 18 AWG, dual insul, BNC, female X 4 mm dual insul; banana jack X dual insul plug, shield banana



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

www.tektronix.com

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
 Austria 00800 2255 4835*
 Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
 Belgium 00800 2255 4835*
 Brazil +55 (11) 3759 7627
 Canada 1 800 833 9200
 Central East Europe and the Baltics +41 52 675 3777
 Central Europe & Greece +41 52 675 3777
 Denmark +45 80 88 1401
 Finland +41 52 675 3777
 France 00800 2255 4835*
 Germany 00800 2255 4835*
 Hong Kong 400 820 5835
 India 800 800 650 1835
 Italy 00800 2255 4835*
 Japan 81 (3) 6714 3010
 Luxembourg +41 52 675 3777
 Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
 Middle East, Asia, and North Africa +41 52 675 3777
 The Netherlands 00800 2255 4835*
 Norway 800 16098
 People's Republic of China 400 820 5835
 Poland +41 52 675 3777
 Portugal 80 08 12370
 Republic of Korea 001 800 8255 2835
 Russia & CIS +7 (495) 7484900
 South Africa +41 52 675 3777
 Spain 00800 2255 4835*
 Sweden 00800 2255 4835*
 Switzerland 00800 2255 4835*
 Taiwan 886 (2) 2722 9622
 United Kingdom & Ireland 00800 2255 4835*
 USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

02 Oct 2011

60W-15081-2

