



OFICJALNY DYSTRYBUTOR

RGB ELEKTRONIKA AGACIAK CIACIEK SP.J.
ul. Jana Długosza 2-6
51-162 Wrocław

+48 71 325 15 05
biuro@rgbelektronika.pl



PRECIZIKA
METROLOGY



L18

PHOTOELECTRIC LINEAR ENCODER



The sealed linear encoder L18 is used to convert linear displacements of key machine components into electrical signals containing information about the value and direction of the displacement.

The encoder consists of a glass scale installed into a rigid hollow housing and a ball-bearing-guided reading head. To be able to work in harsh environments (lubricants and chips), the encoder has sealing lips.

Filtered air can be supplied into the housing of the encoder for extra protection.

The photoelectric unit of the reading head generates sinusoidal micro-current or TTL square-wave (standard RS422) output signals.




Three versions of output signals are available:

- L18-A - Sinusoidal signals, with amplitude approx. 11 μ App, require external subdividing electronics.
- L18-AV - Sinusoidal signals, with amplitude approx. 1 Vpp, require external subdividing electronics.
- L18-F - Square-wave, with integrated subdividing electronics for interpolation x1, x2, x5, x10, x25, x50.



MECHANICAL DATA

Measuring lengths (ML), mm	70; 120; 170; 220; 270; 320; 370; 420; 520; 620; 720; 820; 920; 1020; 1140; 1240 (other intermediate lengths on request)
Accuracy grades to any metre within the ML (at 20°C)	± 10 ; ± 5 ; $\pm 3 \mu$ m (optional)
Grating period	20 μ m; 40 μ m (optional)
Reference marks (RI): -standard for ML \leq 1020 mm -standard for ML > 1140 mm -optional	35mm from both ends of ML 45mm from both ends of ML one RI at any location, or two or more RI's separated by distances of $n \times 50$ mm or distance-coded

Max. traversing speed: -when interpolation factor is 1,2,5,10 -when interpolation factor is 25 -when interpolation factor is 50	1 m/s 0.5 m/s 0.4 m/s
Required moving force with sealing lips	< 3 N
Protection (IEC 529) -without compressed air -with compressed air (optional)	IP53 IP64
Weight	0.4 kg + 0.8 kg/m
Operating temperature	0...+50°C
Storage temperature	-20...+70°C
Permissible vibration (40 to 2000 Hz)	≤ 30 m/s ²
Permissible shock (11 ms)	≤ 100 m/s ²

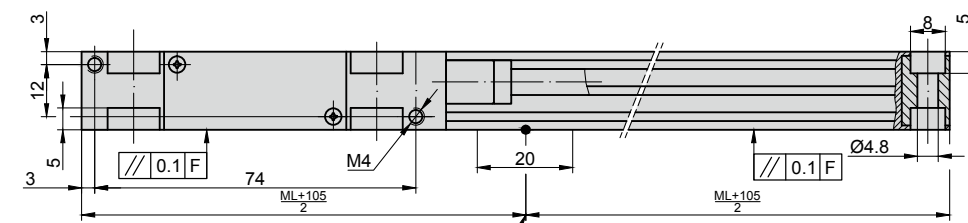

For ML over 620mm housing should be affixed with epoxy resin adhesive (e.g. UHU-plus). Cementing gap MAX 0.2mm

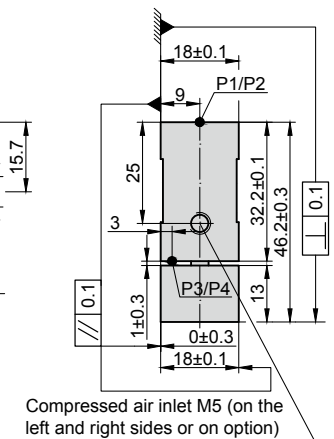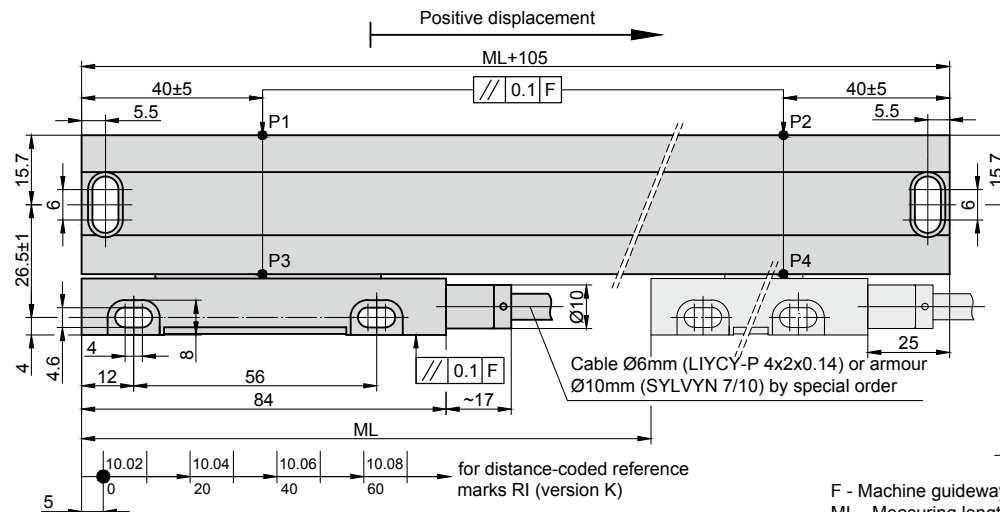

Compressed air inlet M5 (on the left and right sides or on option)

F - Machine guideway
ML - Measuring length
P - Gauging points for alignment

ELECTRICAL DATA

VERSION	L18-A $\sim 11 \mu\text{App}$	L18-AV $\sim 1 \text{Vpp}$	L18-F \square TTL
Power supply	+5 V $\pm 5\%$ / < 90 mA	+5 V $\pm 5\%$ < 120 mA	+5 V $\pm 5\%$ / < 120 mA
Light source	LED	LED	LED
Resolution	Depends on external subdividing electronics	Depends on external subdividing electronics	5; 2.5; 1; 0.5; 0.2; 0.1 μm (after 4-fold dividing in subsequent electronics)
Incremental signals	Two sinusoidal I_1 and I_2 Amplitude at 1 k Ω load: - $I_1 = 7-16 \mu\text{A}$ - $I_2 = 7-16 \mu\text{A}$	Differential sine +A/-A and +B/-B Amplitude at 120 Ω load: - A = 0.6-1.2 V - B = 0.6-1.2 V	Differential square-wave $U1/\overline{U1}$ and $U2/\overline{U2}$. Signal levels at 20 mA load current: - low (logic "0") $\leq 0.5 \text{ V}$ - high (logic "1") $\geq 2.4 \text{ V}$
Reference signal	One quasi-triangular I_0 peak per revolution. Signal magnitude at 1 k Ω load: - $I_0 = 2-8 \mu\text{A}$ (usable component)	One quasi-triangular +R and its complementary -R per revolution. Signals magnitude at 120 Ω load - R = 0.2-0.8 V (usable component)	One differential square-wave $U0/\overline{U0}$ per revolution. Signal levels at 20 mA load current: - low (logic "0") < 0.5 V - high (logic "1") > 2.4 V
Maximum operating frequency	50 kHz	50 kHz	50xk kHz, when interpolation factor is 1, 2, 5, 10 1000 kHz when interpolation factor is 25, 50
Direction of signals	I_2 lags I_1 at reading head displacement from left to right	B+ lags A+ at reading head displacement from left to right	$U2$ lags $U1$ at reading head displacement from left to right
Standard cable length	3 m, without connector	3 m, without connector	3 m, without connector
Maximum cable length	5 m	25 m	25 m
Output signals			

Note: If cable extension is used the power supply conductor section should not be smaller than 0.5 mm².

ACCESSORIES

CONNECTORS FOR CABLE	B12 12-pin round connector	C9 12-pin round connector	C12 12-pin round connector	D9 9-pin flat connector	D15 15-pin flat connector	RS10 10-pin round connector	ONC 10-pin round connector
DIGITAL READOUT DEVICES	CS3000			CS5500			
EXTERNAL INTERPOLATOR	NK						

ORDER FORM

OUTPUT SIGNALS AND RESOLUTION:	MEASURING LENGTH:	REFERENCE MARKS:	ACCURACY:	COMPRESSED AIR:	CABLE LENGTH:	CONNECTOR TYPE:
A - Sinusoidal AV - Sinusoidal F01 - TTL 0.1 μm F02 - TTL 0.2 μm F05 - TTL 0.5 μm F10 - TTL 1.0 μm F25 - TTL 2.5 μm F50 - TTL 5.0 μm	0070 - 70mm 0520 - 520mm ... 1240 - 1240mm	N - none RI S - standard M - every 50 mm K - distance coded Ln/XXX - nRI with 50-fold steps /XXX distance of the first RI from the beginning of ML, mm	05 - $\pm 5 \mu\text{m}$ 10 - $\pm 10 \mu\text{m}$	0 - without compressed air 1 - with compressed air	01 - 1m 02 - 2m 03 - 3m ... CP01 - 1m armoured CP02 - 2m armoured CP03 - 3m armoured ...	W - without connector B12 - round, 12 pins C9 - round, 9 pins C12 - round, 12 pins D9 - flat, 9 pins D15 - flat, 15 pins RS10 - round, 10 pins ONC - round, 10 pins
ORDER EXAMPLE:	1) L18-F10-0420-L1/100-05-03/W					