

Converter - Brake - Inverter Module (CBI 1)



NPT IGBT

Preliminary data

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 1200 \text{ V}$	$V_{CES} = 1200 \text{ V}$
$I_{DAVM25} = 130 \text{ A}$	$I_{C25} = 19 \text{ A}$	$I_{C25} = 30 \text{ A}$
$I_{FSM} = 320 \text{ A}$	$V_{CE(sat)} = 2.9 \text{ V}$	$V_{CE(sat)} = 3 \text{ V}$

Part name (Marking on product)

MUBW30-12A6K

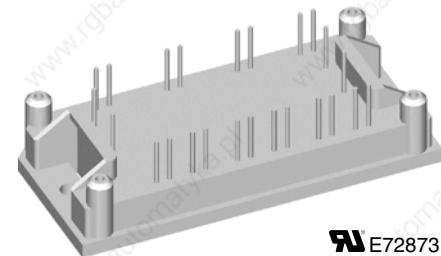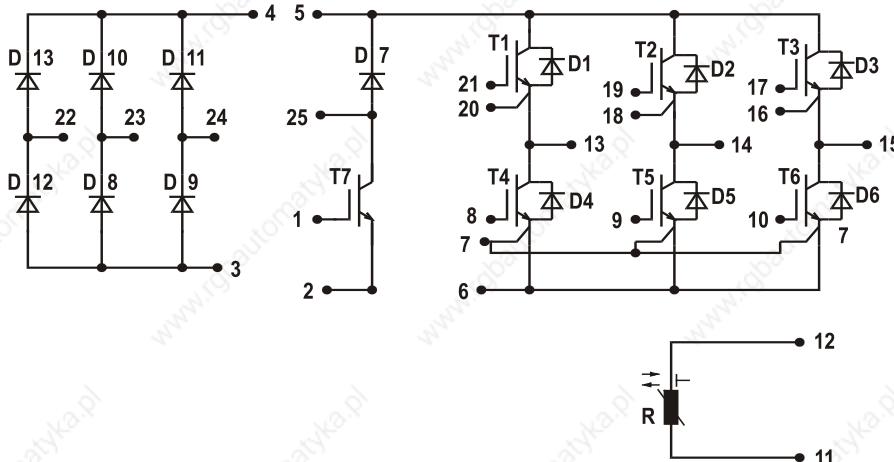

E72873

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with NPT IGBTs
- low saturation voltage
- positive temperature coefficient
- fast switching
- short tail current
- Epitaxial free wheeling diodes with hiperfast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included

Application:

- AC motor drives with
- Input from single or three phase grid
- Three phase synchronous or asynchronous motor
- Electric braking operation

Package:

- UL registered
- Industry standard E1-pack

Output Inverter T1 - T6

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{CES}	collector emitter voltage	$T_{VJ} = 25^\circ\text{C}$ to 150°C		1200		V
V_{GES}	max. DC gate voltage	continuous		± 20		V
V_{GEM}	max. transient collector gate voltage	transient		± 30		V
I_{C25}	collector current	$T_c = 25^\circ\text{C}$	30			A
I_{C80}		$T_c = 80^\circ\text{C}$	21			A
P_{tot}	total power dissipation	$T_c = 25^\circ\text{C}$	130			W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_c = 30 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	3.0 3.4	3.8	V
$V_{GE(th)}$	gate emitter threshold voltage	$I_c = 0.6 \text{ mA}; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ\text{C}$	4.5	6.5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1	mA mA
I_{GES}	gate emitter leakage current	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}$			200	nA
C_{ies}	input capacitance	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$		1000		pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_c = 17.5 \text{ A}$		70		nC
$t_{d(on)}$	turn-on delay time	$T_{VJ} = 125^\circ\text{C}$	100			ns
t_r	current rise time		80			ns
$t_{d(off)}$	turn-off delay time		500			ns
t_f	current fall time		70			ns
E_{on}	turn-on energy per pulse		2.3			mJ
E_{off}	turn-off energy per pulse		1.8			mJ
I_{CM}	reverse bias safe operating area	$RBSOA; V_{GE} = \pm 15 \text{ V}; R_G = 82 \Omega$ $L = 100 \mu\text{H}; \text{clamped induct. load}$ $V_{CEmax} = V_{CES} - L_s \cdot di/dt$	$T_{VJ} = 125^\circ\text{C}$	45		A
t_{sc} (SCSOA)	short circuit safe operating area	$V_{CE} = 1200 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 82 \Omega; \text{non-repetitive}$	$T_{VJ} = 125^\circ\text{C}$	10		μs
R_{thJC}	thermal resistance junction to case	(per IGBT)			0.95	K/W
R_{thCH}	thermal resistance case to heatsink	(per IGBT)		0.35		K/W

Output Inverter D1 - D6

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^\circ\text{C}$		1200		V
I_{F25}	forward current	$T_c = 25^\circ\text{C}$	49			A
I_{F80}		$T_c = 80^\circ\text{C}$	32			A
V_F	forward voltage	$I_F = 30 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	2.0	2.9	V V
I_{RM} t_{rr} $E_{rec(off)}$	max. reverse recovery current reverse recovery time reverse recovery energy	$V_R = 600 \text{ V}$ $di_F/dt = -500 \text{ A}/\mu\text{s}$ $I_F = 30 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 125^\circ\text{C}$	27 150 tbd		A ns μJ
R_{thJC}	thermal resistance junction to case	(per diode)			0.9	K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.3		K/W

 $T_c = 25^\circ\text{C}$ unless otherwise stated

Brake Chopper T7

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{CES}	collector emitter voltage	$T_{VJ} = 25^\circ\text{C}$ to 150°C		1200		V
V_{GES}	max. DC gate voltage	continuous		± 20		V
V_{GEM}	max. transient collector gate voltage	transient		± 30		V
I_{C25}	collector current	$T_c = 25^\circ\text{C}$		19		A
I_{C80}		$T_c = 80^\circ\text{C}$		13		A
P_{tot}	total power dissipation	$T_c = 25^\circ\text{C}$		90		W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_c = 15 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$	2.9	3.4	V
			$T_{VJ} = 125^\circ\text{C}$	3.5		V
$V_{GE(th)}$	gate emitter threshold voltage	$I_c = 0.4 \text{ mA}; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ\text{C}$	4.5		V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$		0.5	mA
			$T_{VJ} = 125^\circ\text{C}$		0.8	mA
I_{GES}	gate emitter leakage current	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}$			100	nA
C_{ies}	input capacitance	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$		600		pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_c = 10 \text{ A}$		45		nC
$t_{d(on)}$	turn-on delay time	$T_{VJ} = 125^\circ\text{C}$		45		ns
t_r	current rise time			40		ns
$t_{d(off)}$	turn-off delay time			290		ns
t_f	current fall time			60		ns
E_{on}	turn-on energy per pulse			1.2		mJ
E_{off}	turn-off energy per pulse			1.1		mJ
I_{CM}	reverse bias safe operating area	$RBSOA; V_{GE} = \pm 15 \text{ V}; R_G = 82 \Omega$ $L = 100 \mu\text{H}$; clamped induct. load $V_{CEmax} = V_{CES} - L \cdot di/dt$	$T_{VJ} = 125^\circ\text{C}$	20		A
t_{sc} (SCSOA)	short circuit safe operating area	$V_{CE} = 720 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 82 \Omega$; non-repetitive	$T_{VJ} = 125^\circ\text{C}$	10		μs
R_{thJC}	thermal resistance junction to case	(per IGBT)			1.37	K/W
R_{thCH}	thermal resistance case to heatsink	(per IGBT)		0.45		K/W

Brake Chopper D7

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^\circ\text{C}$		1200		V
I_{F25}	forward current	$T_c = 25^\circ\text{C}$		15		A
I_{F80}		$T_c = 80^\circ\text{C}$		10		A
V_F	forward voltage	$I_F = 15 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$	3.5		V
			$T_{VJ} = 125^\circ\text{C}$	2.0		V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$	0.06		mA
			$T_{VJ} = 125^\circ\text{C}$	0.2		mA
I_{RM}	max. reverse recovery current	$T_{VJ} = 125^\circ\text{C}$		13		A
t_{rr}	reverse recovery time		$di_F/dt = -400 \text{ A}/\mu\text{s}$	110		ns
R_{thJC}	thermal resistance junction to case	(per diode)			2.5	K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.05		K/W

 $T_c = 25^\circ\text{C}$ unless otherwise stated

Input Rectifier Bridge D8 - D13

Symbol	Definitions	Conditions	Maximum Ratings		
V_{RRM}	max. repetitive reverse voltage		1600		V
I_{FAV}	average forward current	sine 180°	$T_c = 80^\circ\text{C}$	31	A
I_{DAVM}	max. average DC output current	rectangular; $d = 1/3$; bridge	$T_c = 80^\circ\text{C}$	89	A
I_{FSM}	max. surge forward current	$t = 10 \text{ ms}; \sin 50 \text{ Hz}$	$T_c = 25^\circ\text{C}$	320	A
P_{tot}	total power dissipation		$T_c = 25^\circ\text{C}$	80	W

Symbol **Conditions****Characteristic Values**


		min.	typ.	max.	
V_F	forward voltage	$I_F = 30 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.0 1.1	1.35 V V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	0.02 0.4	mA mA
R_{thJC}	thermal resistance junction to case	(per diode)	$T_{VJ} = 25^\circ\text{C}$		1.4 K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.45	K/W

Temperature Sensor NTC**Ratings**

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
R_{25}	resistance		$T_c = 25^\circ\text{C}$	4.45	4.7	kΩ
$B_{25/85}$				3510	5.0	K

Module**Ratings**

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
T_{VJ}	operating temperature		-40		125	°C
T_{VJM}	max. virtual junction temperature				150	°C
T_{stg}	storage temperature		-40		125	°C
V_{ISOL}	isolation voltage	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$			2500	V~
M_d	mounting torque	(M4)	2.0		2.2	Nm
d_s d_A	creep distance on surface strike distance through air		12.7 12.7			mm mm
Weight				40		g


Equivalent Circuits for Simulation**Ratings**

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_0	rectifier diode	D8 - D13	$T_{VJ} = 125^\circ\text{C}$	0.90 9		V mΩ
R_0						
V_0	IGBT	T1 - T6	$T_{VJ} = 125^\circ\text{C}$	tbd		V mΩ
R_0						
V_0	free wheeling diode	D1 - D6	$T_{VJ} = 125^\circ\text{C}$	1.5 14		V mΩ
R_0						
V_0	IGBT	T7	$T_{VJ} = 125^\circ\text{C}$	1.5 120		V mΩ
R_0						
V_0	free wheeling diode	D7	$T_{VJ} = 125^\circ\text{C}$	1.46 63		V mΩ
R_0						

$T_c = 25^\circ\text{C}$ unless otherwise stated

Outline Drawing

Dimensions in mm (1 mm = 0.0394")

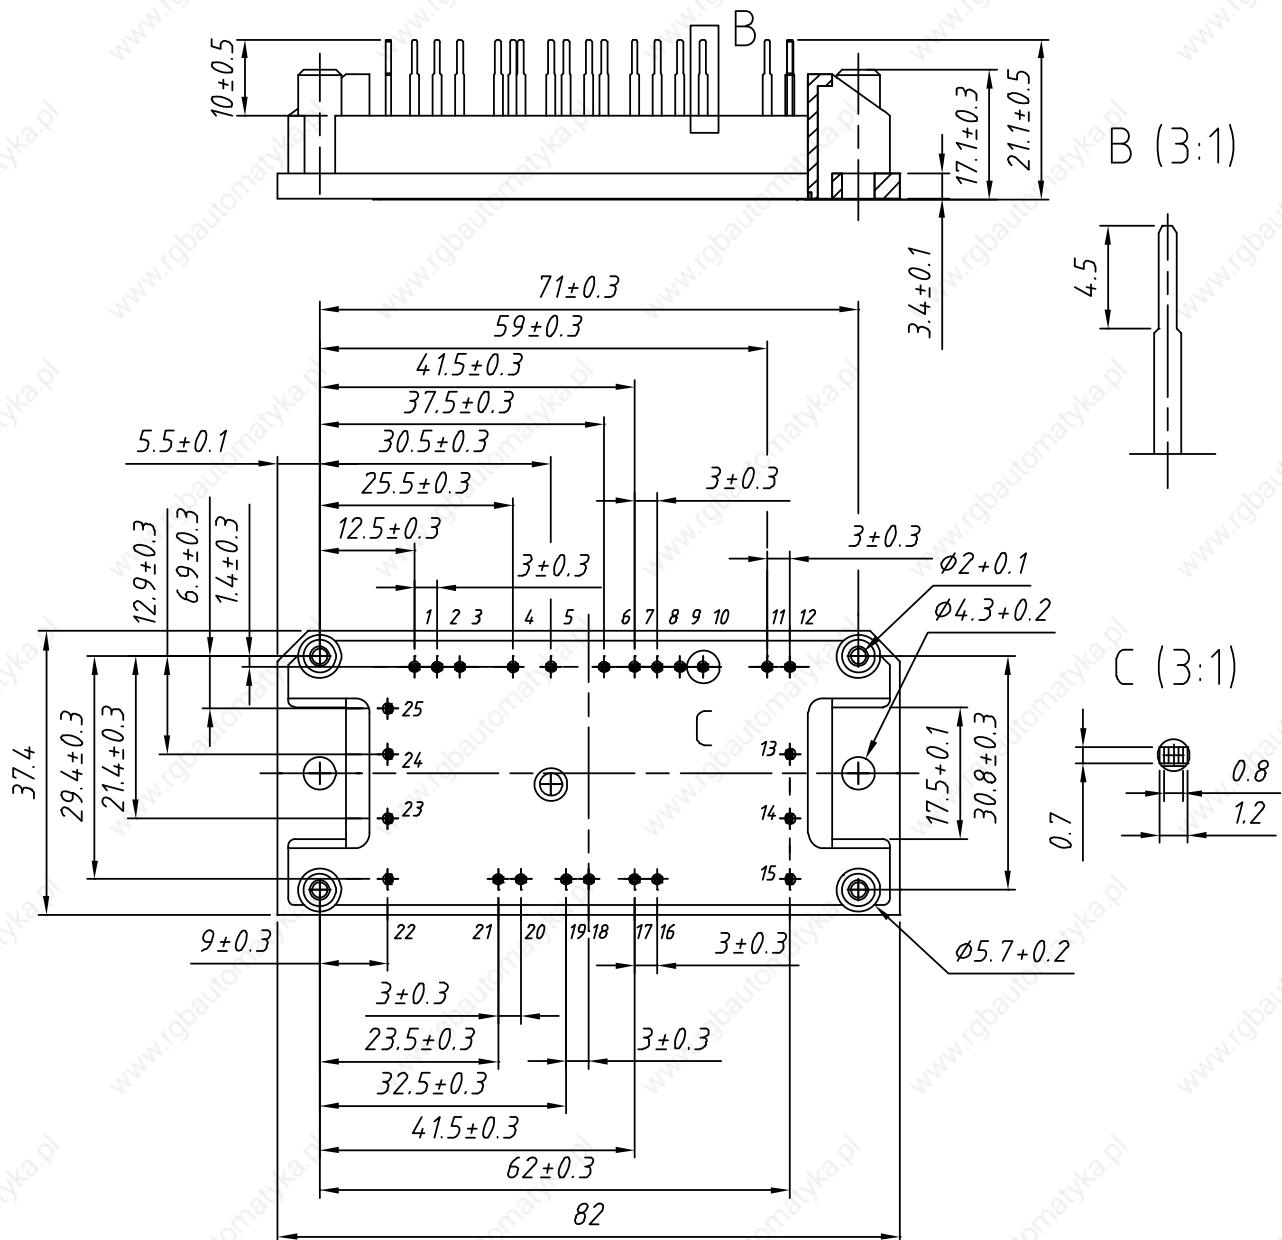

Product Marking

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MUBW 30-12A6K	MUBW30-12A6K	Box	10	499 854