



HF3 Relay (Continued)


Typical RF performance, 50 Ω version

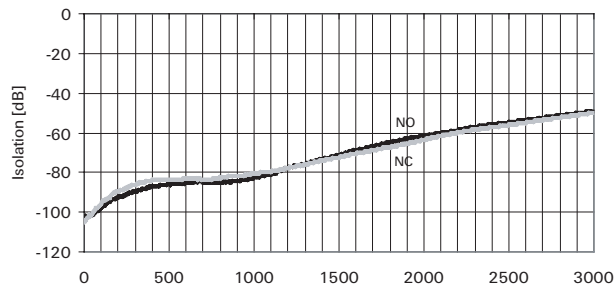




Typical RF performance, 75 Ω version

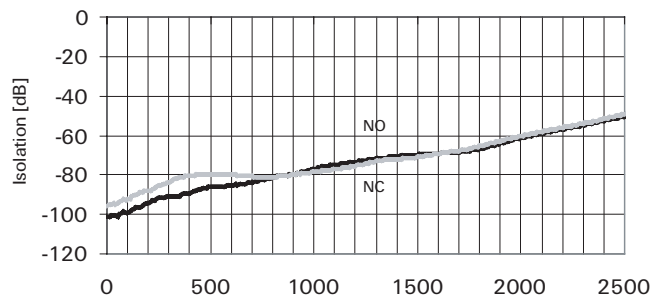

Typical RF performance, 50 Ω version (continued)

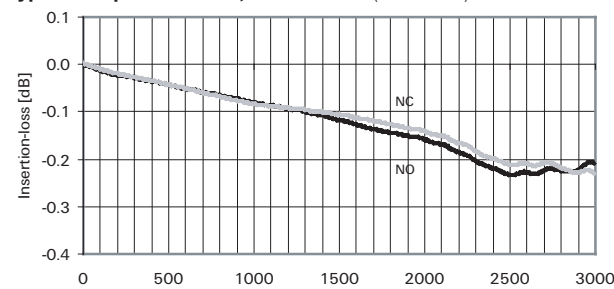


Typical RF performance, 75 Ω version (continued)

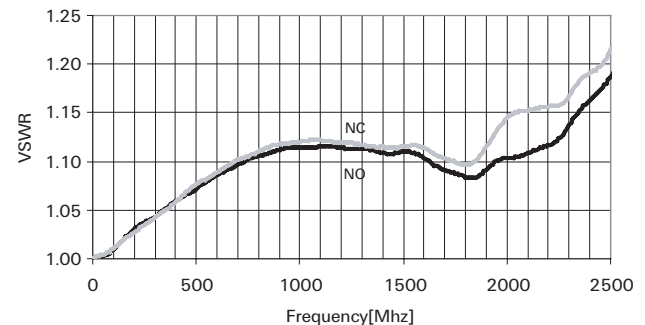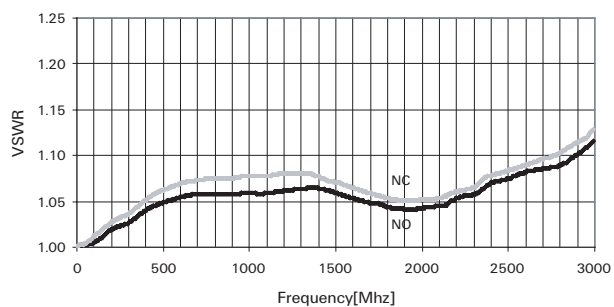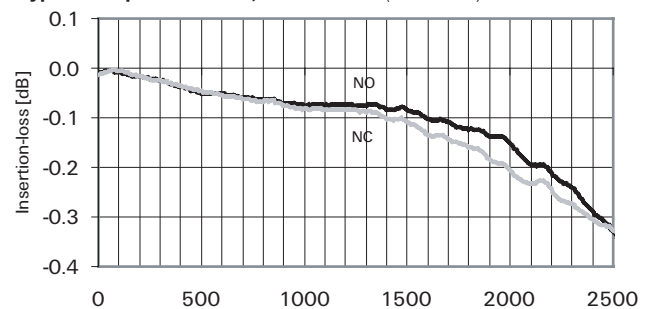


Terminal assignment

TOP view on component side of PCB


Monostable

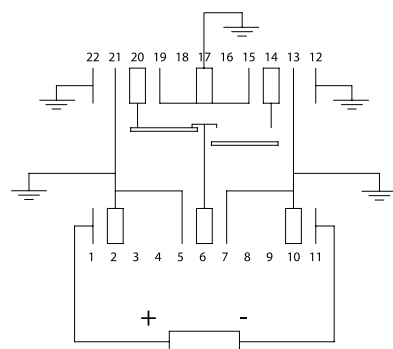

Bistable, 1 coil

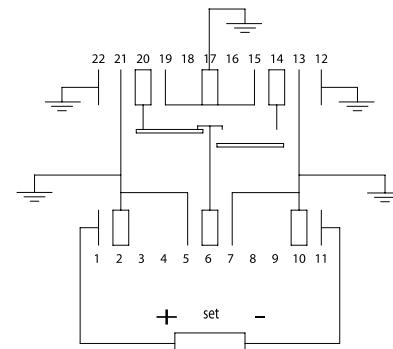

Bistable, 2 coils

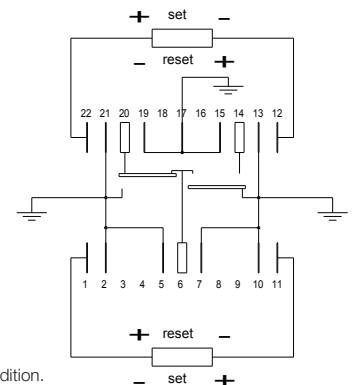


Contacts are shown in reset condition.
Contact position might change during transportation and must be reset before use.

HF3 Relay (Continued)

PCB layout

TOP view on component side of PCB

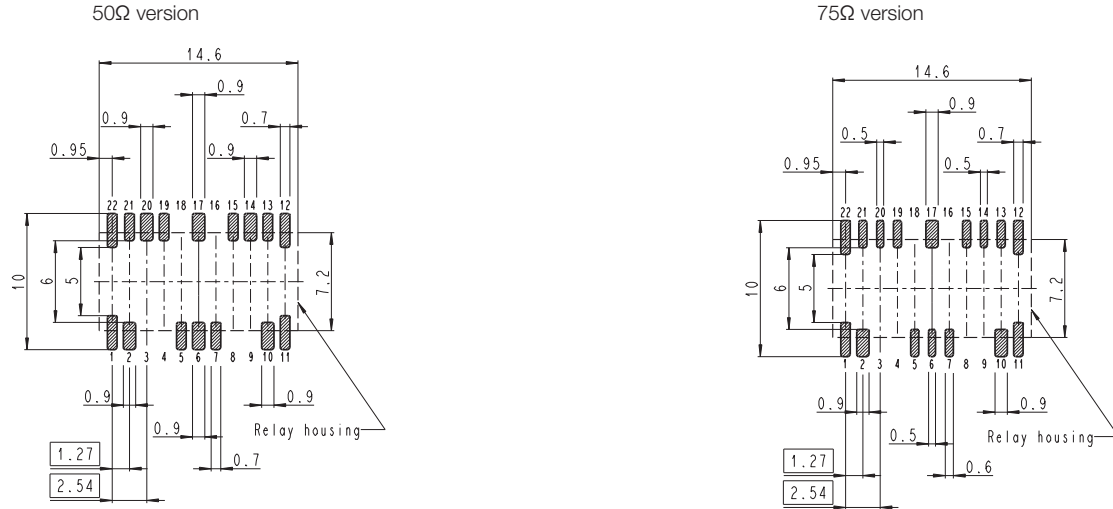

Dimensions

