


**Data Sheet**

Type Number: ..... 6117  
 Designation IEC: ..... ---  
 System: ..... Li-Manganese dioxide / Organic Electrolyte  
 UL Recognition: ..... MH 13654 (N)  
 Nominal Voltage [V]: ..... 3  
 Typical Capacity C [mAh]: ..... 2000  
 Load 1.0 kOhm, at 20 °C down to 2.0 V

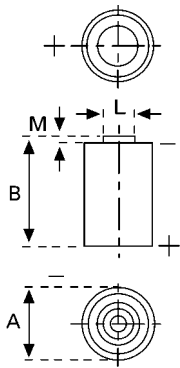

Weight, approx [g]: ..... 21,5  
 Volume [ccm]: ..... 8,5  
 Coding: ..... Date of Manufacturing Quarter/Year

Temperature Ranges [°C]:

	<b>min.</b>	<b>max.</b>
Storage: .....	-55	75
Discharge: .....	-30	75

Dimensions [mm]:

	<b>min.</b>	<b>max.</b>
Diameter [A]: .....	14,45	14,75
Height [B]: .....	49,5	50,5
Shoulder Diameter[L]: .....	7	
Shoulder Height [M]: .....	0,6	

Segment: ..... Electronic

Main Applications: ..... Watch  
 Photo  
 Electronic

**Typical Capacities (at 20° C):**

Discharge Type:	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [µA]:	1000	Ω Time:	745 h Capacity [mAh]: 2000 Energy [mWh]: 5600
Discharge Type:	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [µA]:	620	Ω Time:	430 h Capacity [mAh]: 1850 Energy [mWh]: 5000