


Long Distance Type


■ Dimensions

(unit: mm)


● PRDL(T)12-4D

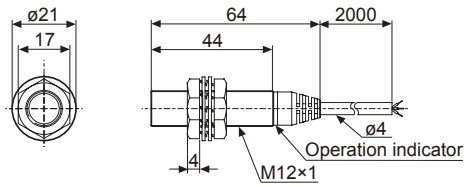


● PRDL(T)12-8D

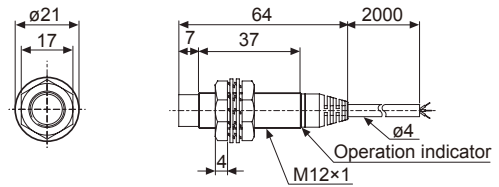


● PRD(T)18-7D

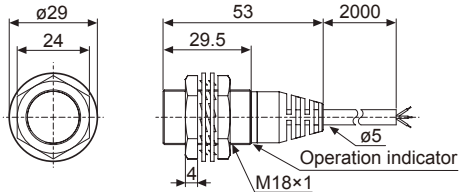


● PRD(T)18-14D

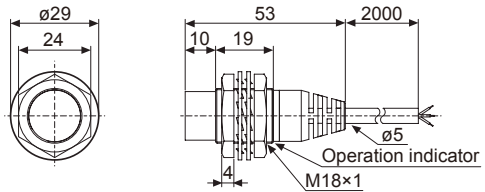


● PRDL(T)18-7D

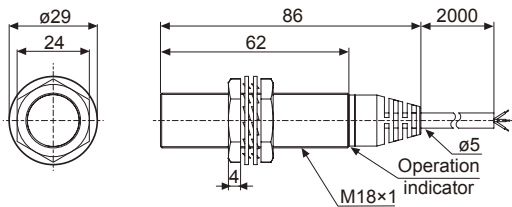


● PRDL(T)18-14D

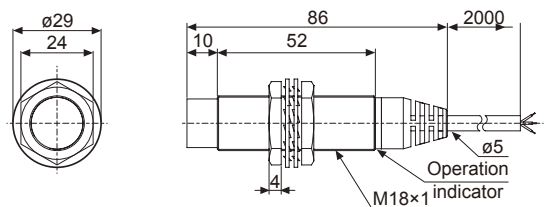


● PRD(T)30-15D

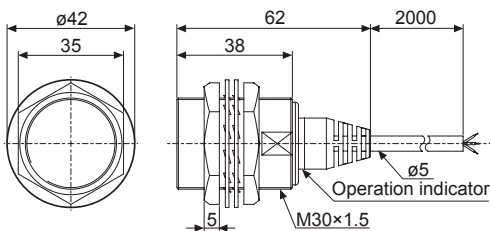


● PRD(T)30-25D

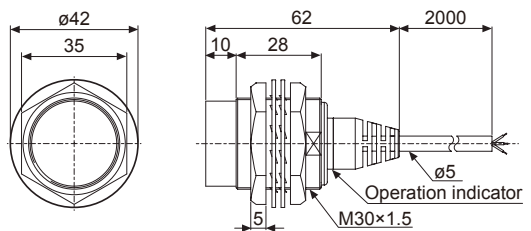


● PRDL(T)30-15D

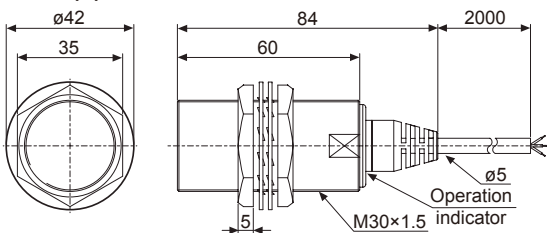


● PRDL(T)30-25D

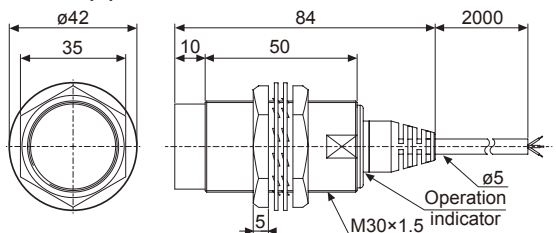

● PRDW(T)12-4D

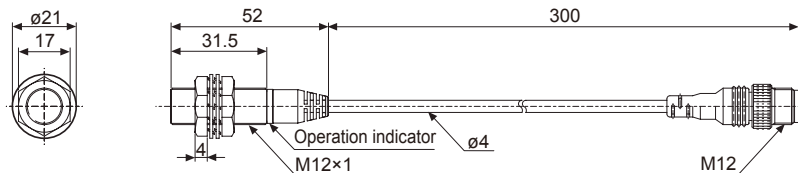

● PRDW(T)12-8D

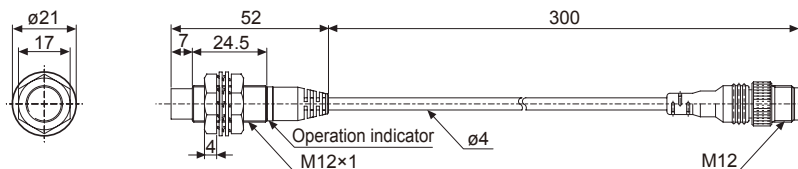

(A) Photo electric sensor

(B) Fiber optic sensor

(C) Door/Area sensor

(D) Proximity sensor

(E) Pressure sensor

(F) Rotary encoder

(G) Connector/Socket

(H) Temp. controller

(I) SSR/Power controller

(J) Counter

(K) Timer

(L) Panel meter

(M) Tacho/Speed/Pulse meter

(N) Display unit

(O) Sensor controller

(P) Switching mode power supply

(Q) Stepper motor& Driver&Controller

(R) Graphic/Logic panel

(S) Field network device

(T) Software


(U) Other

PRD/PRDW Series


■ Dimensions

(unit: mm)


● PRDWL12-4D□

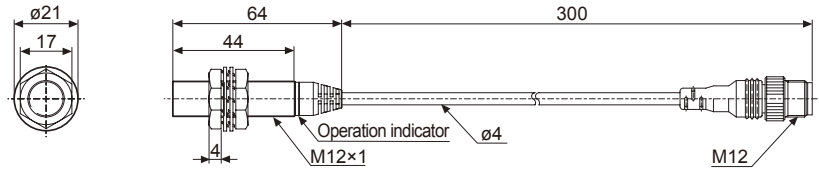


● PRDWL12-8D□

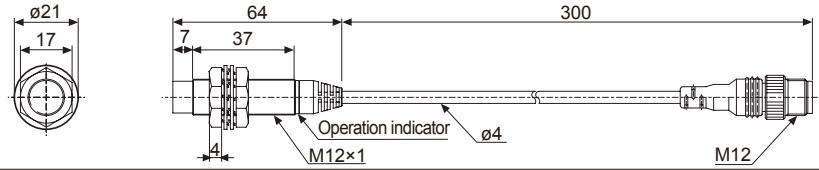


● PRDW(T)18-7D□

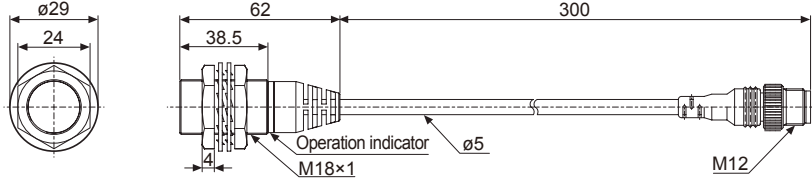


● PRDW(T)18-14D□

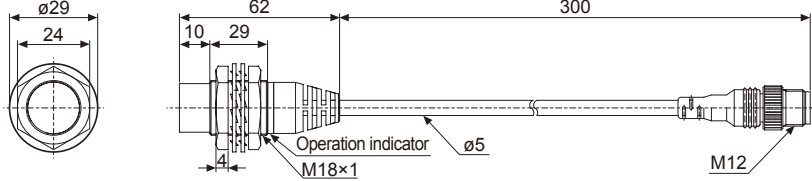


● PRDWL(T)18-7D□

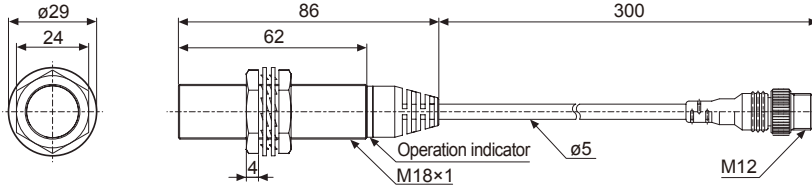

● PRDWL(T)18-14D□

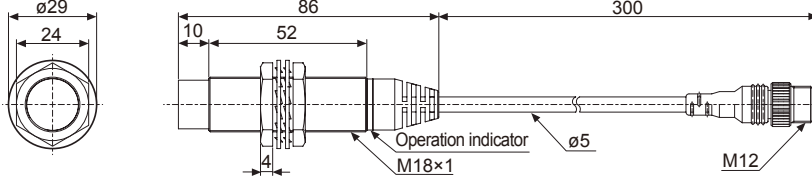

● PRDW(T)30-15D□

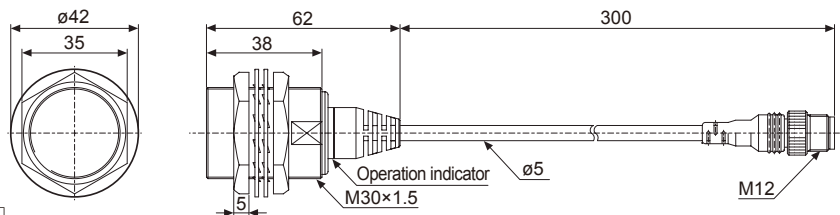

● PRDW(T)30-25D□

