


Typ/Type

# UI30/16,5

Sicherheitstransformator  
 VDE 0570 / EN 61558 / ENEC10  
 UL 506 / CSA geprüft  
 Vakuumverguss  
 Temperaturklasse ta70°C/B  
 Cul-Gewicht: 70 g  
 Gesamt-Gewicht: 260 g

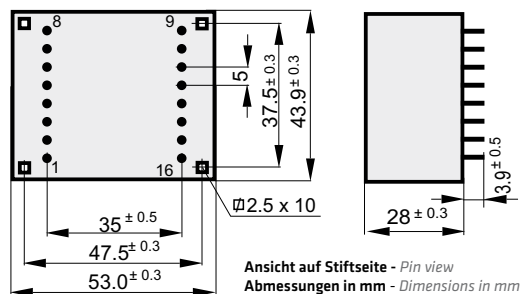

Nennleistung/Nominal power

# 10.0 VA

Safety transformer  
 VDE 0570 / EN 61558 / ENEC10  
 UL 506 / CSA approved  
 Vacuum casting  
 Temperature class ta70°C/B  
 Cul weight: 70 g  
 Total weight: 260 g



Bestell Nr. <i>Order No.</i>	Primär [V] <i>Primary</i>	Sekundär [V] <i>Secondary</i>	Strom [mA] <i>Current</i>	Stiftbelegung <i>Pin configuration</i>	Leerlaufspannung [V] <i>No load voltage</i>	Prüfzeichen / Approvals		
						VDE	UL 1585	UL 506
FLG30.16/60246-1	2x115	2x6	2x833	1-3+6-8 / 9-10+15-16	2x7,70	●		●
FLG30.16/60144-1	2x115	2x7,5	2x666	1-3+6-8 / 9-10+15-16	2x9,40	●		●
FLG30.16/60247-1	2x115	2x9	2x555	1-3+6-8 / 9-10+15-16	2x11,50	●		●
FLG30.16/60010-1	2x115	2x12	2x416	1-3+6-8 / 9-10+15-16	2x14,80	●		●
FLG30.16/60011-1	2x115	2x15	2x333	1-3+6-8 / 9-10+15-16	2x18,40	●		●
FLG30.16/60012-1	2x115	2x18	2x277	1-3+6-8 / 9-10+15-16	2x22,20	●		●
FLG30.16/60248-1	2x115	2x24	2x208	1-3+6-8 / 9-10+15-16	2x30,50	●		●

Trenntransformator / isolation transformer