



Engineering Data

Maximum Switching Capacity


G2RL-1A, G2RL-1

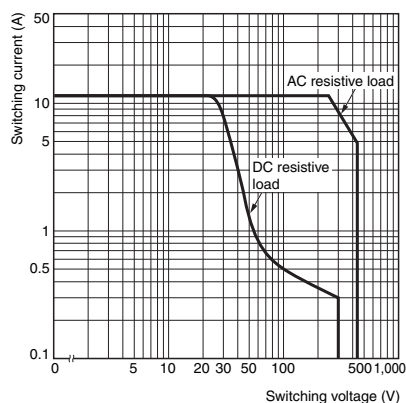

G2RL-1A-E, G2RL-1-E

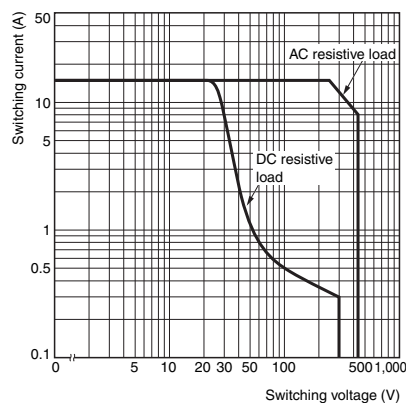


G2RL-2A, G2RL-2

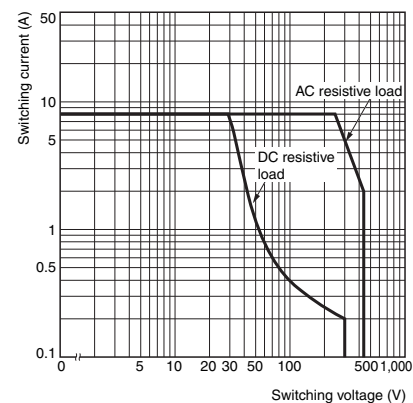


High-sensitivity type


G2RL-1A-H, G2RL-1-H

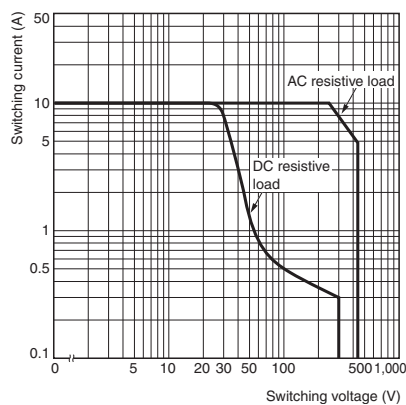


Ambient Temperature vs. Rated Carry Current

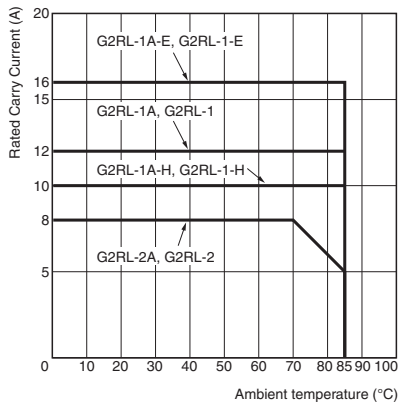

Ambient Temperature vs. Maximum Coil Voltage

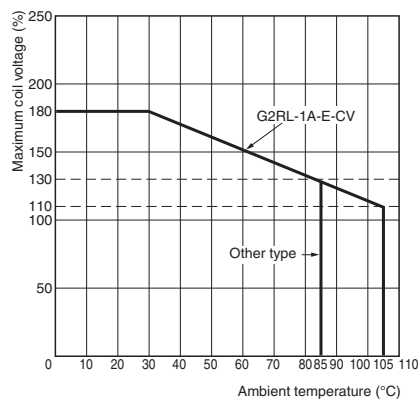


Ambient Temperature vs. Must Operate and Must Release Voltages

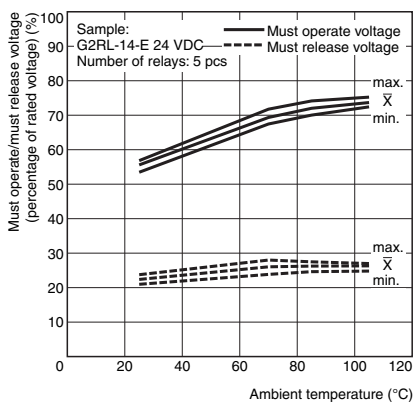

Note. The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

G2RL-1 (A)-E



Shock direction

X ← → X'

Y ↑ ↓ Y'

Z ⊙

Z' ⊗