




Model Number

NBB7-F104M-A2-200MM-V1


Features

- 7 mm embeddable
- 4-wire DC
- Metal housing

Connection



Pinout



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Accessories


V1-G-2M-PVC

Cable socket, M12, 4-pin, PVC cable

V1-W-2M-PVC

Cable socket, M12, 4-pin, PVC cable

Dimensions

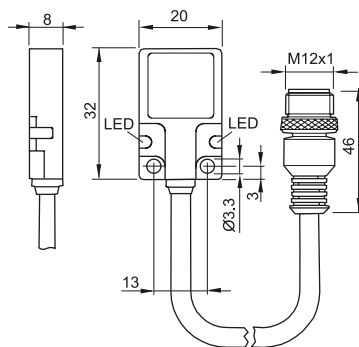

Technical Data

General specifications

Switching element function		PNP	NO/NC
Rated operating distance	s_n	7 mm	
Installation		embeddable	
Output polarity		DC	

Nominal ratings

Operating voltage	U_B	10 ... 30 V DC	
Switching frequency	f	150 Hz	
Reverse polarity protected		reverse polarity protected	
Short-circuit protection		pulsing	
Voltage drop	U_d	≤ 2.5 V	
Operating current	I_L	200 mA	
Off-state current	I_r	≤ 80 μ A	
No-load supply current	I_0	≤ 15 mA	
Indication of the switching state		LED	

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)		
---------------------	--------------------------------	--	--

Mechanical specifications

Connection type	Cable connector M12 x 1, 4-pin with PUR cable 200 mm		
Housing material	GD-Zn		
Sensing face	PA 12		
Protection degree	IP67		

Compliance with standards and directives

Standard conformity			
Standards	IEC / EN 60947-5-2:2004		

Approvals and certificates

UL approval	cULus Listed, General Purpose		
CCC approval	Products with a maximum operating voltage of ≤ 36 V do not bear a CCC marking because they do not require approval.		