


## 251/253 Series, PICO® II Very Fast-Acting Fuse

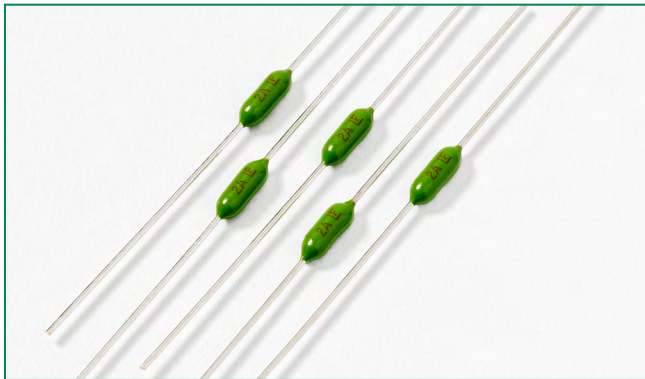

### Description

The PICO® II Very Fast-Acting Fuse is designed to meet an extensive array of performance characteristics in a space-saving subminiature package.

### Features







- Very fast-acting
- Small size
- Wide current rating range (0.062A- 15A)
- Halogen-free available
- Wide operating temperature range
- Low temperature re-rating

### Applications

Secondary protection for space constrained applications

- Flat-panel display TV
- LCD monitor
- LCD backlight inverter
- Office machines
- Power supply
- Audio/Video system
- Lighting system
- Medical equipment

### Agency Approvals

| Agency  | Agency File Number<br>253 Series | Agency File Number<br>251 Series | Ampere Range                        |
|---|----------------------------------|----------------------------------|-------------------------------------|
|    | N/A                              | E10480                           | 0.062A - 15A                        |
|    | N/A                              | 29862                            | 0.062A - 15A                        |
|    | N/A                              | PSE_NBK200416-<br>JP1021         | 1A - 5A                             |
|   | N/A                              | J50158379                        | 0.500A - 10A                        |
|  | FM10                             | N/A                              | 0.062A - 15A                        |
|  | N/A                              | 2009010207366577                 | 0.500A, 1A, 2A,<br>2.5A, 3A, 4A, 5A |

### Electrical Characteristics for Series

| % of Ampere Rating | Ampere Rating                                   | Opening Time     |
|--------------------|---|------------------|
| 100%               | 0.062A - 15A                                    | 4 Hours, Min.    |
| 200%               | 0.062A - 7A                                     | 1 Second, Max.   |
|                    | 10A   | 3 Seconds, Max.  |
| 275%               | 12 - 15A  | 10 Seconds, Max. |
|                    | 0.500A, 1A, 2A,<br>2.5A, 3A, 4A, 5A,<br>7A, 10A | 300 msec., Max.  |
| 400%               | 0.05A, 1A, 2A,<br>2.5A, 3A, 4A, 5A,<br>7A, 10A  | 30 msec., Max.   |
| 1000%              | 0.500A, 1A, 2A,<br>2.5A, 3A, 4A, 5A,<br>7A, 10A | 4 msec., Max.    |

### Additional Information



**Datasheet  
251 Series**



**Resources  
251 Series**



**Samples  
251 Series**



**Datasheet  
253 Series**







**Resources  
253 Series**




**Samples  
253 Series**

### Electrical Specifications by Item

| Ampere Rating (A) | Amp Code | Ordering Number (Std.) | Ordering Number (Mil.) | Max Voltage Rating (V) | Interrupting Rating          | Nominal Cold Resistance (Ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) | Nom Voltage Drop (V) | Agency Approvals  |   |   |     |                        |   |
|-------------------|----------|------------------------|------------------------|------------------------|------------------------------|--------------------------------|---|----------------------|---|---|---|-----|------------------------|---|
|                   |          |                        |                        |                        |                              |                                |   |                      |  |  |  | TUV | QPL<br>253 Series Only |  |
| .062              | .062     | 251.062                | 253.062                | 125                    | 300 A @ 125VDC<br>50A@125VAC | 7.000                          | 0.000113  | 1.4                  | x   | x   |   |     | x                      |   |
| .125              | .125     | 251.125                | 253.125                | 125                    |                              | 1.700                          | 0.00174   | 0.285                | x   | x   |   |     | x                      |   |
| .200              | .200     | 251.200                | 253.200                | 125                    |                              | 0.895                          | 0.0048  | 0.345                | x   | x   |   |     |                        |   |
| .250              | .250     | 251.250                | 253.250                | 125                    |                              | 0.665                          | 0.0116  | 0.24                 | x   | x   |   |     | x                      |   |
| .375              | .375     | 251.375                | 253.375                | 125                    |                              | 0.395                          | 0.0296  | 0.215                | x   | x   |   |     | x                      |   |
| .500              | .500     | 251.500                | 253.500                | 125                    |                              | 0.302                          | 0.0598  | 0.2165               | x   | x   |   | x   | x                      | x   |
| .630              | .630     | 251.630                |                        | 125                    |                              | 0.205                          | 0.08  | 0.188                | x   | x   |   |     |                        |   |
| .750              | .750     | 251.750                | 253.750                | 125                    |                              | 0.175                          | 0.153   | 0.176                | x   | x   |   | x   | x                      |   |
| 1.00              | 001.     | 251001.                | 253001.                | 125                    |                              | 0.128                          | 0.256   | 0.194                | x   | x   | x   | x   | x                      | x   |
| 1.25              | 1.25     | 2511.25                |                        | 125                    |                              | 0.100                          | 0.390   | 0.2                  | x   | x   | x   |     |                        |   |
| 1.50              | 01.5     | 25101.5                | 25301.5                | 125                    |                              | 0.0823                         | 0.587   | 0.21                 | x   | x   | x   | x   | x                      |   |
| 2.00              | 002.     | 251002.                | 253002.                | 125                    |                              | 0.0473                         | 0.405   | 0.141                | x   | x   | x   | x   | x                      | x   |
| 2.50              | 02.5     | 25102.5                |                        | 125                    |                              | 0.0360                         | 0.721   | 0.132                | x   | x   | x   | x   |                        | x   |
| 3.00              | 003.     | 251003.                | 253003.                | 125                    |                              | 0.0295                         | 1.19  | 0.131                | x   | x   | x   | x   | x                      | x   |
| 3.50              | 03.5     | 25103.5                |                        | 125                    |                              | 0.0240                         | 1.58  | 0.1205               | x   | x   | x   | x   |                        |   |
| 4.00              | 004.     | 251004.                | 253004.                | 125                    |                              | 0.0204                         | 2.45  | 0.114                | x   | x   | x   | x   | x                      | x   |
| 5.00              | 005.     | 251005.                | 253005.                | 125                    |                              | 0.0158                         | 4.14  | 0.11                 | x   | x   | x   | x   | x                      | x   |
| 7.00              | 007.     | 251007.                | 253007.                | 125                    | 0.0107                       | 10.4                           | 0.102   | x                    | x   |   | x   | x   |                        |   |
| 10.0              | 010.     | 251010.                | 253010.                | 125                    | 0.0072                       | 25.5                           | 0.1   | x                    | x   |   | x   | x   |                        |   |
| 12.0              | 012.     | 251012.                |                        | 32                     | 300A@32VDC<br>& 50A@32VAC    | 0.0059                         | 45.2  | 0.0878               | x   | x   |   |     |                        |   |
| 15.0              | 015.     | 251015.                | 253015.                | 32                     |                              | 0.00446                        | 68.8  | 0.071                | x   | x   |   |     | x                      |   |

Note: Higher ampere ratings are available. Please contact Littelfuse Technical Support or your Littelfuse products representative for assistance.

### Temperature Re-rating Curve

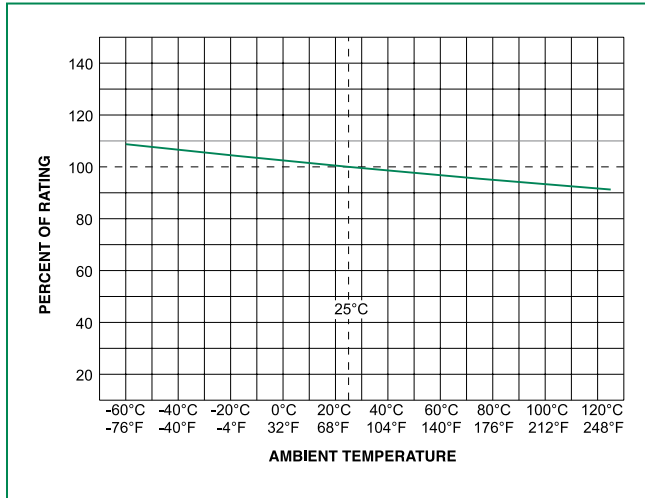

Note:

1. Re-rating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

### Soldering Parameters

#### Recommended Process Parameters:


| Wave Parameter  | Lead-Free Recommendation for 251 Series only |
|---|--|
| <b>Preheat:</b><br>(Depends on Flux Activation Temperature) | (Typical Industry Recommendation)            |
| Temperature Minimum:  | 100°C  |
| Temperature Maximum:  | 150°C  |
| Preheat Time:   | 60-180 seconds                               |
| <b>Solder Pot Temperature:</b>                              | 260°C Maximum                                |
| <b>Solder Dwell Time:</b>                                   | 2-5 seconds                                  |

#### Recommended Hand Soldering Parameters:

Solder Iron Temperature: 350°C +/- 5°C  
 Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process**

### Average Time Current Curves

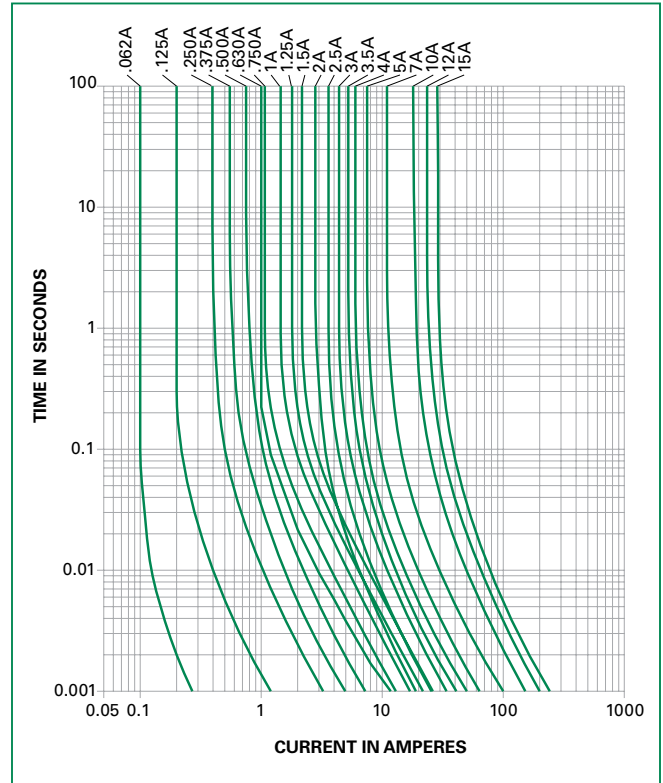


### Product Characteristics


|                              |  |
|------------------------------|--|
| <b>Materials</b>             | Encapsulated, Epoxy-Coated<br><b>Body:</b> Pure Tin-coated Copper wire leads       |
| <b>Solderability</b>         | MIL-STD-202, Method 208  |
| <b>Lead Pull Force</b>       | MIL-STD-202, Method 211, Test Condition A (will withstand a 7lbs. axial pull test) |
| <b>Fuses To MIL SPEC</b>     | For fuses to MIL-PRF-23419, FM10 change the series number from 251 to 253          |
| <b>Operating Temperature</b> | -55°C to +125°C (Consider re-rating)   |

|   |  |
|---|--|
| <b>Vibration</b>                              | MIL-STD-202, Method 201 (10–55 Hz); Method 204, Test Condition C (55–2000 Hz at 10 G's Peak) |
| <b>Shock</b>                                  | MIL-STD-202, Method 213, Test Condition I (100 G's peak for 6 msec.)                         |
| <b>Insulation Resistance (After Opening):</b> | MIL-STD-202, Method 302, Test Condition A (10,000 ohms minimum at 100 volts)                 |
| <b>Moisture Resistance</b>                    | MIL-STD-202, Method 106  |
| <b>Resistance to Soldering Heat</b>           | Withstands 60 seconds above 200°C and up to 260°C, maximum                                   |
| <b>Flammability Rating</b>                    | UL 94V-0   |

### Dimensions

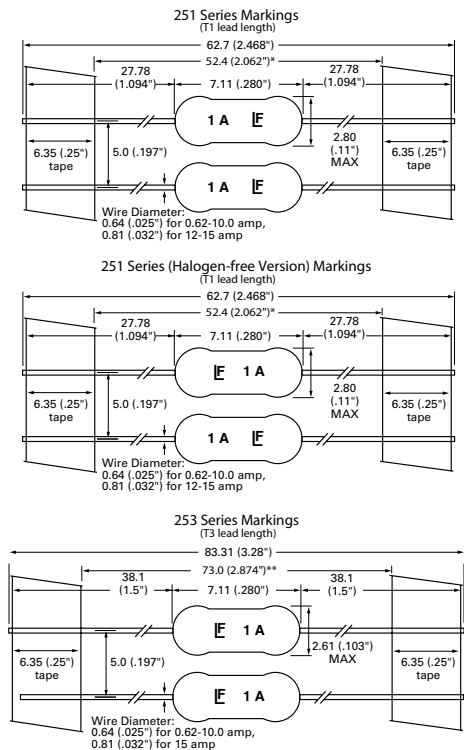

### Part Numbering System

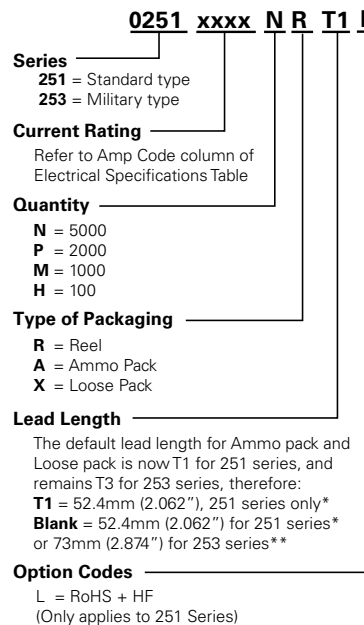

### Packaging

| Packaging Option                   | Packaging Specification | Quantity & Packaging Code   |
|------------------------------------|-------------------------|---|
| *T1: 52.4mm (2.062") Tape and Reel | EIA 296                 | Please refer to available quantities above in "Part Numbering System" |
| **T3: 73mm (2.874") Tape and Reel  | EIA 296                 |   |

The default lead length for both ammo pack and loose pack is T1 for 251 and is T3 for 253.

Notes: \* T1 dimension is defined as the length of the component between the two tapes. The full component length is 62.7mm (2.468"). **T1 length is for 251 series only.**  
 \*\* T3 dimension is defined as the length of the component between the two tapes. The full component length is 83.37mm (3.28"). **T3 length is for 253 series only.**