

■ Characteristics

Item	Classification	Standard model
Contact resistance *1		100 mΩ max.
Operate time		10 ms max.
Release time		5 ms max.
Insulation resistance *2		1,000 MΩ min.
Dielectric strength	Between coil and contacts	4,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	1,000 VAC, 50/60 Hz for 1 min
Impulse withstand voltage (between coil and contacts)		8 kV (1.2 x 50 μs)
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	100 m/s ²
Durability	Mechanical	10,000,000 operations (18,000 operations per hour)
	Electrical	• NO 25,000 operations: 10 A at 250 VAC resistive load (operation: ON for 1 sec, OFF for 3 sec) <High-capacity type> 50,000 operations: 10 A at 125 VAC resistive load (operation: ON for 1 sec, OFF for 3 sec) 200,000 operations: 3 A at 125 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 50,000 operations: 5 A at 250 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 3 A at 250 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 5 A at 30 VDC resistive load (operation: ON for 1 sec, OFF for 1 sec) • NC 200,000 operations: 3 A at 125 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 3 A at 250 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 3 A at 30 VDC resistive load (operation: ON for 1 sec, OFF for 1 sec)
Failure rate (P level) (reference *3)		10 mA at 5 VDC
Ambient operating temperature		-40°C to 105°C (with no icing or condensation) -40°C to 85°C (with no icing or condensation) <High-capacity type>
Ambient operating humidity		5% to 85%
Weight		Approx. 6.5 g

Note. Note. Values in the above table are the initial values at 23°C.


*1. The contact resistance is possible with 1 A applied at 5 VDC using a fall-of-potential method.

*2. Testing conditions: The insulation resistance was measured with a 500 VDC megohmmeter at the same locations as the dielectric strength was measured.


*3. This value was measured at a switching frequency of 120 operations/min.

Engineering Data


Maximum Switching Capacity

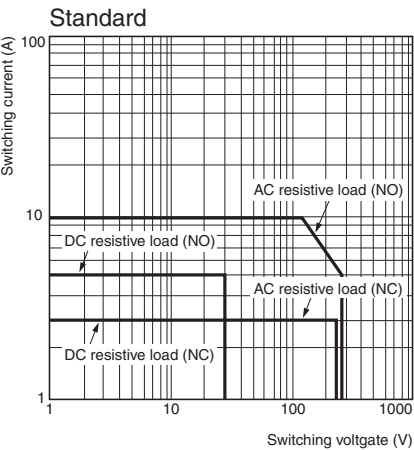


Ambient Temperature VS. Maximum Coil Voltage

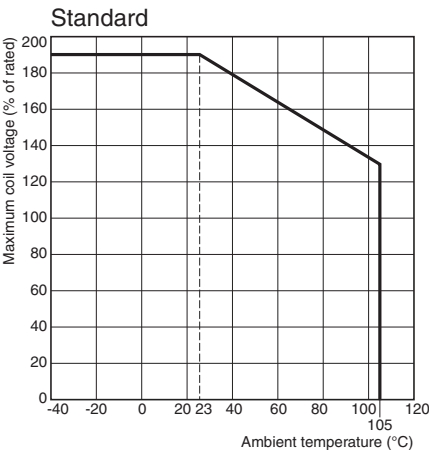


Shock Malfunction

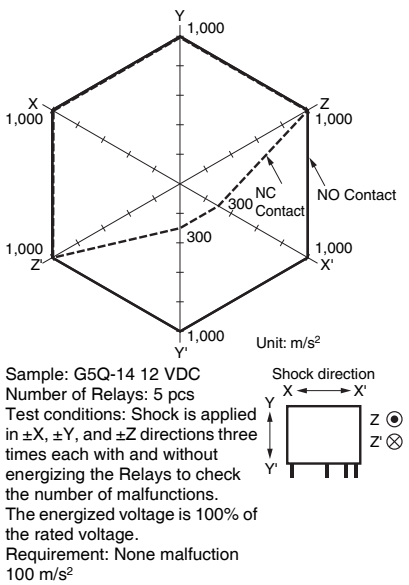

High-capacity(-EU)

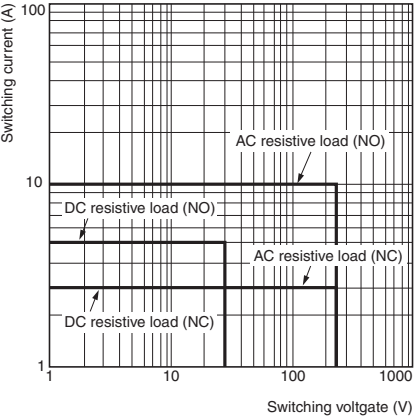

High-capacity(-EU)

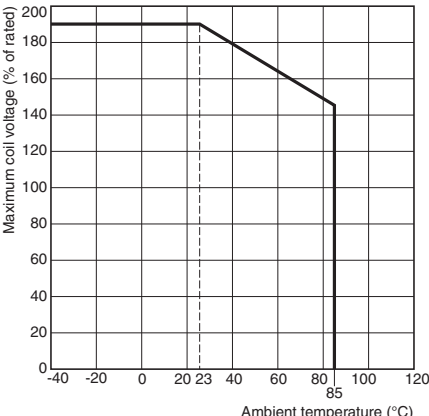


Note. The Maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Dimensions

(Unit: mm)


G5Q-1A(4)(-EU)(-HA)

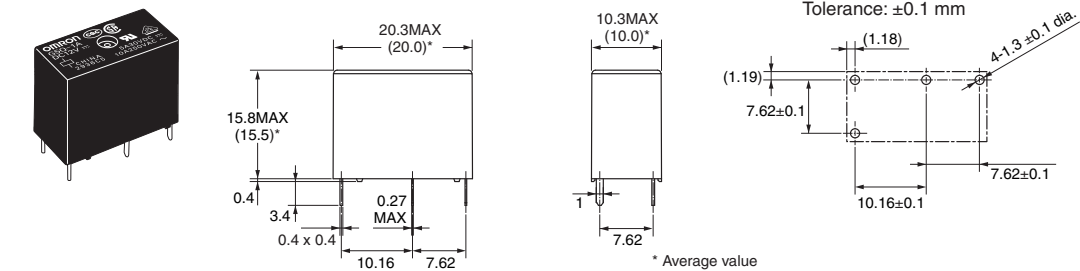

Terminal Arrangement/ Internal Connections (Bottom View)



G5Q-1(4)(-EU)(-HA)(-PW)

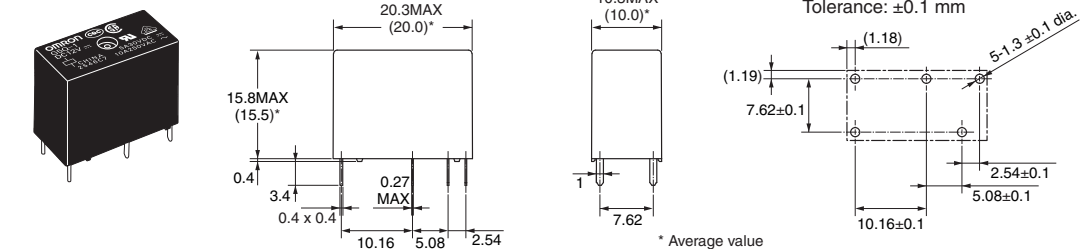

Terminal Arrangement/ Internal Connections (Bottom View)

