Displacement Sensor, Ultraflat Industrial Potentiometer Membrane

FEATURES

- Sealed
- Infinite resolution
- High integration capacity
- Durability
- Rectilinear: UIPMA type
- Rotational: UIPMC type
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free

RoHS COMPLIANT

DESIGN SUPPORT TOOLS

click logo to get started

3D Models Available

QUICK REFERENCE DATA	
Sensor type	LINEAR or ROTATIONAL, conductive plastic
Output type	Output by connector
Market appliance	Industrial
Dimensions	4 mm (thickness max.)

ELECTRICAL SPECIFICATIONS		
PARAMETER	**UIPMA**	**UIPMC**
Total resistance (R_n)	4.7 kΩ	10 kΩ
Tolerance on R_n	± 30 %	
Dissipation	≤ 0.1 W/cm of travel (1)	≤ 1 W to 70 °C
Theoretical electrical travel (TET)	20 mm to 250 mm (1)	312°
Tolerance on TET	± 1 mm	± 3°
Useful electrical travel (UET)	TET - 2 mm	306°
Electrical continuity travel (ECT)	TET + 4 mm	325°
Linearity	± 2 %	± 5 %
Temperature coefficient	-300 ppm/°C ± 300 ppm/°C	
Collector / track current (I_c)	≤ 1 mA	
Recommended current I_c	≤ 100 µA	
Recommended load impedance	≥ 100 R_n	
Output smoothness	< 0.1 % (NFC 93 255)	

Note

(1) See “Specific UIPMA Characteristics” table

MECHANICAL SPECIFICATIONS		
PARAMETER	**UIPMA**	**UIPMC**
Design	Flexible insulating films	Flexible insulating films
Mechanical travel	Electrical continuity travel	Electrical continuity travel
Backlash	< 0.1 mm	< 0.3°
Mounting	With double-sided adhesive on flat, clean, and dry support	
Speed displacement	≤ 1.5 m/s	
Drive	Force ≥ 0.3 N	Torque ≥ 1 N cm
Protection class (NFC 20 010)	IP66 (electrical connection and plug excluded)	
Maximum alignment fault	± 1 mm	-

PERFORMANCE		
PARAMETER	**UIPMA**	**UIPMC**
Life	> 3M cycles (depending on chosen wiper)	
Operating temperature range	-10 °C to +50 °C	
Storage temperature range	-40 °C to +50 °C	
Support	Flat, clean, and dry	

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

For technical questions, contact: mcbprecisionpot@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SAP PART NUMBERING GUIDELINES - UIPM

MODEL	TYPE	UIPMA: THEORETICAL ELECTRICAL TRAVEL (mm) UIPMC: EXTERNAL DIAMETER (mm)	TYPE	VALUE	LINEARITY	LEADS	PACKAGING
UIPM	A = linear	050 100 (on request) 150 200 (on request) 250	I = industrial	472 = 4K7	X = ± 2 %	C = connector	B = bulk
UIPM	C = rotational	030	I = industrial	103 = 10K	J = ± 5 %	C = connector	B = bulk

ACCESSORY WIPER

Wiper type A	ACCSUIPMWIPERKB434

CONNECTIONS

Connector Berg Duflex 67.013.003, contacts 76.785.301
The connector of UIPMA / UIPMC is intended for use with Berg terminal ref. 76785-YXX and Berg headers ref. 76384-YXX or 76382-YXX

DIMENSIONS in millimeters

UIPMA

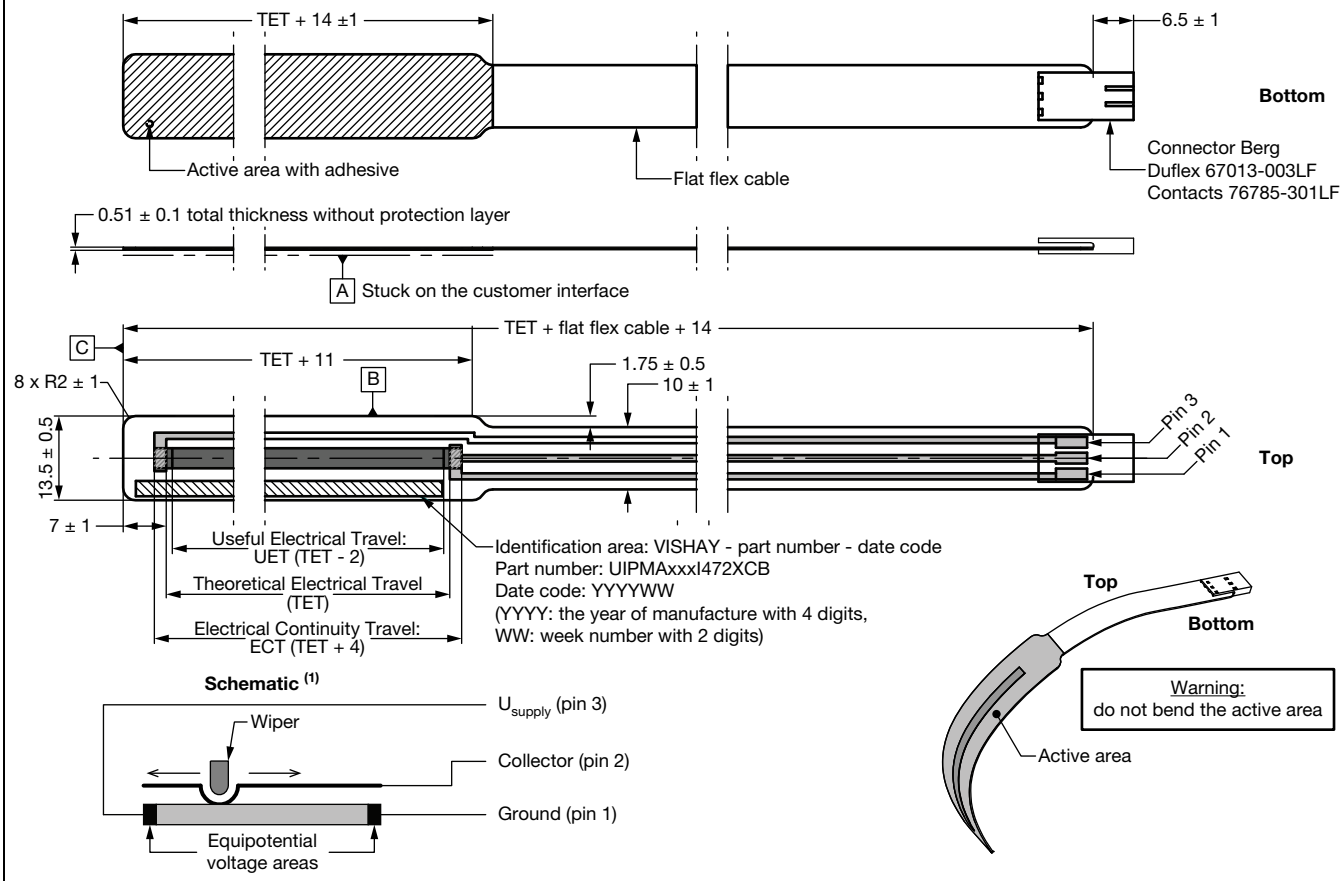

TET (mm)	FLAT FLEX CABLE (mm)
50	100
100	50
150	100
200	100
250	50

Notes

- Tolerancing according to ISO 8015
- General tolerances according to ISO 2768 - mK

(1) Ground and U_{supply} can be swapped to change the slope sign

For technical questions, contact: mcbprecisionpot@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000