



95.05



Approvals
(according to type):



| Relay type | | 40.31 | 40.51, 40.52, 40.61 |
|---|--------|--------------|---------------------|
| Screw terminal socket: panel or 35 mm rail (EN 50022) mount | BLUE | 95.03 | 95.05 |
| | BLACK* | 95.03.0 | 95.05.0 |
| Retaining and release clip (supplied with socket) | | 095.01 | 095.01 |
| Identification tag | | 095.00.4 | 095.00.4 |
| Modules | | 99.02 | 99.02 |
| Timer modules | | 86.10, 86.20 | 86.10, 86.20 |
| 8-way jumper link for 95.03 and 95.05 sockets | | 095.18 | 095.18 |

- RATED VALUES: 10 A - 250 V
with a current >10 A, the contact terminal must be connected in parallel (21 with 11, 24 with 14, 22 with 12)
- INSULATION: ≥ 6 kV (1.2/50 μ s) between coil and contacts
- PROTECTION CATEGORY: IP 20
- AMBIENT TEMPERATURE: (-40...+70) °C
- TORQUE: 0.5 Nm
- MAX WIRE SIZE:

| | solid wire | flexible wire |
|-----------------|-------------|---------------|
| mm ² | 1x6 / 2x2.5 | 1x4 / 2x2.5 |
| AWG | 1x14 / 2x12 | 1x14 / 2x12 |

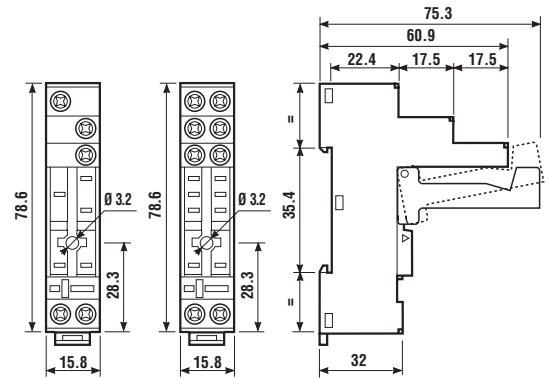


99.02

| 99 Series modules for 95.03 and 95.05 sockets | | BLUE | BLACK* |
|---|---------------------|----------------|------------------|
| Diode | (6...220) V DC | 99.02.3.000.00 | 99.02.3.000.00.0 |
| Diode (inverted polarity) | (6...220) V DC | 99.02.2.000.00 | 99.02.2.000.00.0 |
| LED | (6...24) V DC/AC | 99.02.0.024.59 | 99.02.0.024.59.0 |
| LED | (28...60) V DC/AC | 99.02.0.060.59 | 99.02.0.060.59.0 |
| LED | (110...240) V DC/AC | 99.02.0.230.59 | 99.02.0.230.59.0 |
| LED + Diode | (6...24) V DC | 99.02.9.024.99 | 99.02.9.024.99.0 |
| LED + Diode | (28...60) V DC | 99.02.9.060.99 | 99.02.9.060.99.0 |
| LED + Diode | (110...220) V DC | 99.02.9.220.99 | 99.02.9.220.99.0 |
| LED + Diode (inverted polarity) | (6...24) V DC | 99.02.0.024.79 | 99.02.0.024.79.0 |
| LED + Diode (inverted polarity) | (28...60) V DC | 99.02.9.060.79 | 99.02.9.060.79.0 |
| LED + Diode (inverted polarity) | (110...220) V DC | 99.02.9.220.79 | 99.02.9.220.79.0 |
| LED + Varistor | (6...24) V DC/AC | 99.02.0.024.98 | 99.02.0.024.98.0 |
| LED + Varistor | (28...60) V DC/AC | 99.02.0.060.98 | 99.02.0.060.98.0 |
| LED + Varistor | (110...240) V DC/AC | 99.02.0.230.98 | 99.02.0.230.98.0 |
| RC | (6...24) V DC/AC | 99.02.0.024.09 | 99.02.0.024.09.0 |
| RC | (28...60) V DC/AC | 99.02.0.060.09 | 99.02.0.060.09.0 |
| RC | (110...240) V DC/AC | 99.02.0.230.09 | 99.02.0.230.09.0 |
| No - remanence | (110...240) V AC | 99.02.8.230.07 | 99.02.8.230.07.0 |



095.18

| | |
|---|--------|
| 8-way jumper link for 95.03, and 95.05 sockets | 095.18 |
|---|--------|

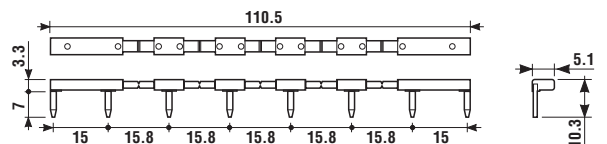


- RATED VALUES: 10 A - 250 V

* Available on request






| Relay type | 40.31 | 40.51, 40.52, 40.61 | | |
|---|--------|---------------------|---------|---------|
| Screw terminal socket: panel or 35 mm rail (EN 50022) mount | BLUE | 95.63 | 95.65 | 95.75 |
| | BLACK* | 95.63.0 | 95.65.0 | 95.75.0 |
| Retaining clip (supplied with socket) | 095.71 | 095.71 | 095.71 | |
| Modules | 99.01 | — | 99.01 | |
| 8-way jumper link for 95.63 and 95.75 sockets | 095.08 | 095.08 | 095.08 | |

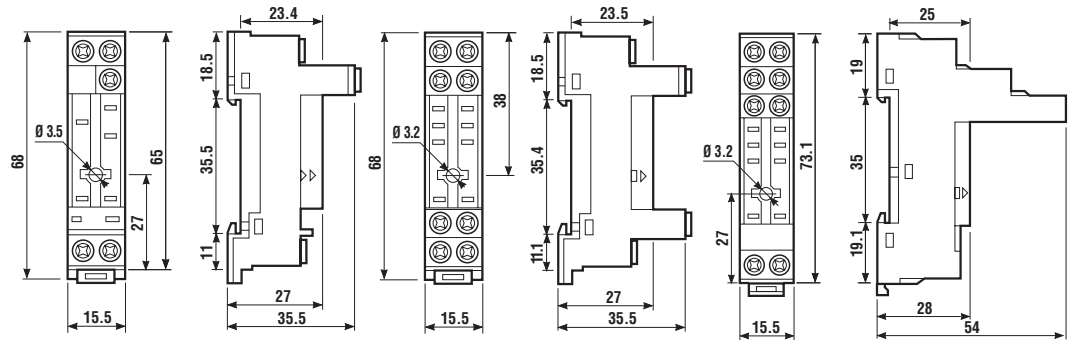

Approvals
(according to type):



- RATED VALUES: 10 A - 250 V
with a current > 10 A, the contact terminal must be connected in parallel (21 with 11, 24 with 14, 22 with 12)
- INSULATION: ≥ 6 kV (1.2/50 μ s) between coil and contacts
- PROTECTION CATEGORY: IP 20
- AMBIENT TEMPERATURE: (-40...+70) °C
- TORQUE: 0.5 Nm
- MAX WIRE SIZE:



| | solid wire | flexible wire |
|-----------------|-------------|---------------|
| mm ² | 1x6 / 2x2.5 | 1x4 / 2x2.5 |
| AWG | 1x14 / 2x12 | 1x14 / 2x12 |



| 99 Series modules for 95.63 and 95.75 sockets | | BLUE | BLACK* |
|---|---------------------|----------------|------------------|
| Diode | (6...220) V DC | 99.01.3.000.00 | 99.01.3.000.00.0 |
| Diode (inverted polarity) | (6...220) V DC | 99.01.2.000.00 | 99.01.2.000.00.0 |
| LED | (6...24) V DC/AC | 99.01.0.024.59 | 99.01.0.024.59.0 |
| LED | (28...60) V DC/AC | 99.01.0.060.59 | 99.01.0.060.59.0 |
| LED | (110...240) V DC/AC | 99.01.0.230.59 | 99.01.0.230.59.0 |
| LED + Diode | (6...24) V DC | 99.01.9.024.99 | 99.01.9.024.99.0 |
| LED + Diode | (28...60) V DC | 99.01.9.060.99 | 99.01.9.060.99.0 |
| LED + Diode | (110...220) V DC | 99.01.9.220.99 | 99.01.9.220.99.0 |
| LED + Diode (inverted polarity) | (6...24) V DC | 99.01.0.024.79 | 99.01.0.024.79.0 |
| LED + Diode (inverted polarity) | (28...60) V DC | 99.01.9.060.79 | 99.01.9.060.79.0 |
| LED + Diode (inverted polarity) | (110...220) V DC | 99.01.9.220.79 | 99.01.9.220.79.0 |
| LED + Varistor | (6...24) V DC/AC | 99.01.0.024.98 | 99.01.0.024.98.0 |
| LED + Varistor | (28...60) V DC/AC | 99.01.0.060.98 | 99.01.0.060.98.0 |
| LED + Varistor | (110...240) V DC/AC | 99.01.0.230.98 | 99.01.0.230.98.0 |
| RC | (6...24) V DC/AC | 99.01.0.024.09 | 99.01.0.024.09.0 |
| RC | (28...60) V DC/AC | 99.01.0.060.09 | 99.01.0.060.09.0 |
| RC | (110...240) V DC/AC | 99.01.0.230.09 | 99.01.0.230.09.0 |
| No - remanence | (110...240) V AC | 99.01.8.230.07 | 99.01.8.230.07.0 |

*Available on request