General purpose relays
For printed circuit mounting

Type 55.12
- 2 CO 10 A

Type 55.13
- 3 CO 10 A

Type 55.14
- 4 CO 7 A

- AC & DC coils
- Cadmium Free contacts
- Contact material options
- RT III (wash tight) option available

	55.12	55.13	55.14
	• 2 CO 10 A • PCB mount	• 3 CO 10 A • PCB mount	• 4 CO 7 A • PCB mount
	 	 	 
FOR UL RATINGS SEE: *"General technical information" page* V			
For outline drawing see page 6	Copper side view	Copper side view	Copper side view
Contact specification			
Contact configuration	2 CO (DPDT)	3 CO (3PDT)	4 CO (4PDT)
Rated current/Maximum peak current A	10/20	10/20	7/15
Rated voltage/ Maximum switching voltage V AC	250/400	250/400	250/250
Rated load AC1 VA	2500	2500	1750
Rated load AC15 (230 V AC) VA	500	500	350
Single phase motor rating (230 V AC) kW	0.37	0.37	0.125
Breaking capacity DC1: 30/110/220 V A	10/0.5/0.25	10/0.5/0.25	7/0.5/0.25
Minimum switching load mW (V/mA)	300 (5/5)	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi	AgNi
Coil specification			
Nominal voltage (U_N) V AC (50/60 Hz)	6 - 12 - 24 - 48 - 60 - 110 - 120 - 230 - 240		
V DC	6 - 12 - 24 - 48 - 60 - 110 -125 - 220		
Rated power AC/DC VA (50 Hz)/W	1.5/1	1.5/1	1.5/1
Operating range AC	(0.8…1.1)U_N	(0.8…1.1)U_N	(0.8…1.1)U_N
DC	(0.8…1.1)U_N	(0.8…1.1)U_N	(0.8…1.1)U_N
Holding voltage AC/DC	0.8 U_N / 0.5 U_N	0.8 U_N / 0.5 U_N	0.8 U_N / 0.5 U_N
Must drop-out voltage AC/DC	0.2 U_N / 0.1 U_N	0.2 U_N / 0.1 U_N	0.2 U_N / 0.1 U_N
Technical data			
Mechanical life AC/DC cycles	$20 \cdot 10^6$ / $50 \cdot 10^6$	$20 \cdot 10^6$ / $50 \cdot 10^6$	$20 \cdot 10^6$ / $50 \cdot 10^6$
Electrical life at rated load AC1 cycles	$200 \cdot 10^3$	$200 \cdot 10^3$	$150 \cdot 10^3$
Operate/release time ms	10/5	9/5	9/5
Insulation between coil and contacts (1.2/50 µs) kV	4	4	4
Dielectric strength between open contacts V AC	1000	1000	1000
Ambient temperature range °C	–40…+85	–40…+85	–40…+85
Environmental protection	RT I	RT I	RT I
Approvals (according to type)			

55 SERIES
General purpose relays 7 to 10 A

General purpose relays
For socket mounting

Type 55.32
- 2 CO 10 A

Type 55.33
- 3 CO 10 A

Type 55.34
- 4 CO 7 A

- AC & DC coils
- Lockable test button and mechanical flag indicator as standard on 2 & 4 pole types
- Integral LED and coil suppression options
- 94 series sockets for PCB or 35 mm rail mounting (EN 60715) with Screw, Screwless or Push-in terminals
- Coil Indication and EMC suppression modules 99 series and Timer module 86.30 options
- Optional alternative mounting adaptors
- UL Listing (certain relay/socket combinations)
- Cadmium Free contacts
- Contact material options
- European Patent

For UL ratings see: "General technical information" page V

For outline drawing see page 6

	55.32	55.33	55.34
	• 2 CO 10 A • Plug-in 94 series sockets	• 3 CO 10 A • Plug-in 94 series sockets	• 4 CO 7 A • Plug-in 94 series sockets
	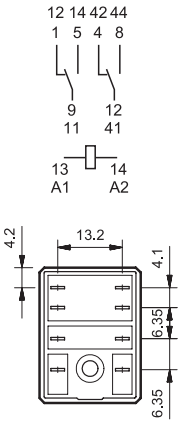	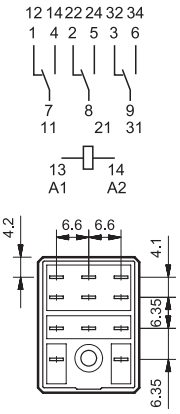	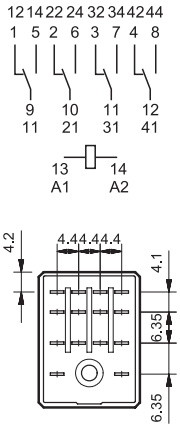
Contact specification			
Contact configuration	2 CO (DPDT)	3 CO (3PDT)	4 CO (4PDT)
Rated current/Maximum peak current A	10/20	10/20	7/15
Rated voltage/ Maximum switching voltage V AC	250/400	250/400	250/250
Rated load AC1 VA	2500	2500	1750
Rated load AC15 (230 V AC) VA	500	500	350
Single phase motor rating (230 V AC) kW	0.37	0.37	0.125
Breaking capacity DC1: 30/110/220 V A	10/0.5/0.25	10/0.5/0.25	7/0.5/0.25
Minimum switching load mW (V/mA)	300 (5/5)	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi	AgNi
Coil specification			
Nominal voltage (U_N) V AC (50/60 Hz)	6 - 12 - 24 - 48 - 60 - 110 - 120 - 230 - 240		
V DC	6 - 12 - 24 - 48 - 60 - 110 -125 - 220		
Rated power AC/DC VA (50 Hz)/W	1.5/1	1.5/1	1.5/1
Operating range AC	(0.8…1.1)U_N	(0.8…1.1)U_N	(0.8…1.1)U_N
DC	(0.8…1.1)U_N	(0.8…1.1)U_N	(0.8…1.1)U_N
Holding voltage AC/DC	0.8 U_N / 0.5 U_N	0.8 U_N / 0.5 U_N	0.8 U_N / 0.5 U_N
Must drop-out voltage AC/DC	0.2 U_N / 0.1 U_N	0.2 U_N / 0.1 U_N	0.2 U_N / 0.1 U_N
Technical data			
Mechanical life AC/DC cycles	$20 \cdot 10^6$ / $50 \cdot 10^6$	$20 \cdot 10^6$ / $50 \cdot 10^6$	$20 \cdot 10^6$ / $50 \cdot 10^6$
Electrical life at rated load AC1 cycles	$200 \cdot 10^3$	$200 \cdot 10^3$	$150 \cdot 10^3$
Operate/release time ms	10/5	9/5	9/5
Insulation between coil and contacts (1.2/50 µs) kV	4	4	4
Dielectric strength between open contacts V AC	1000	1000	1000
Ambient temperature range °C	–40…+85	–40…+85	–40…+85
Environmental protection	RT I	RT I	RT I
Approvals (according to type)			

I-2019, www.findernet.com