



Schneider Electric Relays


200 N. Martingale Rd., Suite 1000

Schaumburg, IL 60173

Phone: 847-441-2540 • Fax: 847-881-0741

E-Mail: relays@schneider-electric.com • Web site: www.serelays.com

ITEM # 788XBXRC-24A, 788 POWER RELAYS / DPDT, 10 AMP RATING

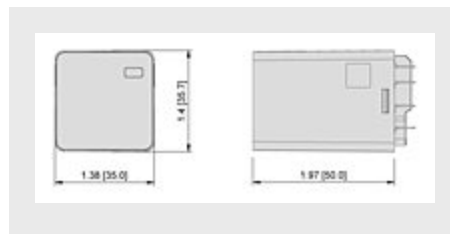

[SPECIFICATIONS](#) | [COIL CHARACTERISTICS](#) | [PERFORMANCE CHARACTERISTICS](#) | [ENVIRONMENT](#) | [PRODUCT CERTIFICATIONS](#)

Specifications	
Check Inventory	Check Distributor Inventory
Status	Standard
Legacy Part No.	788XBXC-24A
Terminal Style	Plug-in
Contact Configuration	DPDT
Thermal (Carrying) Current	10 A
Coil Resistance (Ohms)	72 Ohm
Load Type	Standard
Contact Materials	Silver Alloy with Gold Flash
Maximum Switching Voltages	IEC: 250 VAC/28 VDC UL: 300 VAC/30 VDC
Switching Current at Voltage (AC, Resistive)	IEC: 10 A at 250 VAC 50/60 Hz UL: 10 A at 277 VAC 50/60 Hz

Switching Current at Voltage (DC, Resistive)	IEC: 10 A at 28 VDC UL: 10 A at 30 VDC
---	---

Switching Current at Voltage (HP)	1 at 277 VAC hp 1/3 at 120 VAC hp
--	--------------------------------------

Pilot Duty	B300
-------------------	------

Minimum Switching Requirement	10 mA at 17 VDC
--------------------------------------	-----------------

Cover Options	Plain Cover
----------------------	-------------

Features	Mechanical flag indicator
-----------------	---------------------------

Coil Characteristics -

Coil Voltage	24 VAC 50/60 Hz
---------------------	-----------------

Operating Range - % of Nominal (AC)	85 to 110 %
--	-------------

Operating Range - % of Nominal (DC)	80 to 110 %
--	-------------

Average Consumption (AC / VA)	3 VA
--------------------------------------	------

Drop-out Voltage Threshold (AC)	15 %
--	------

Performance Characteristics -

Electrical Life (UL508), Operations at Rated Current (Resistive)	100000
---	--------

Mechanical Life, Unpowered	5000000
-----------------------------------	---------

Operating Time (Response Time)	20 ms
---------------------------------------	-------

Dielectric Strength - Between Coil and Contact (AC)	2500 V(rms)
--	-------------

Dielectric Strength - Between Poles (AC)	2000 V(rms)
---	-------------

Environment -

Vibration Resistance - Operational	3 g-n at 35-150 Hz
---	--------------------

Shock Resistance	10 g-n
-------------------------	--------

Degree of Protection	IP 40
-----------------------------	-------

Weight	83 g 2.93 oz
---------------	-----------------

Product Certifications -

Agency Approvals

UL (E164862)
CSA (225619 Class 3211-07)
CE
RoHs