


# PCB Relay G2RL

## A Power Relay with Various Models

- High-sensitivity (250 mW) and High-capacity (16 A) versions.
- Designed for cooking and HVAC controls: blower motor, damper, active air purification, duct flow boost fans, etc.
- Conforms to VDE (EN61810-1). UL recognized/ CSA certified
- Meets EN60335-1 requirements for household products.
- Clearance and creepage distance: 10 mm/10 mm.
- Tracking resistance: CTI>250
- Coil Insulation system: Class F.
- RoHS Compliant

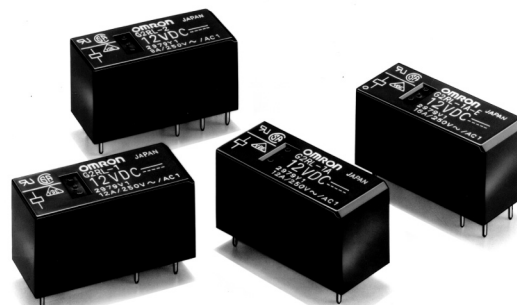

## Ordering Information

Classification	Enclosure ratings	Contact form			
		SPST-NO	SPDT	DPST-NO	DPDT
General-purpose	Flux protection	G2RL-1A	G2RL-1	G2RL-2A	G2RL-2
	Fully sealed	G2RL-1A4	G2RL-14	G2RL-2A4	G2RL-24
High-capacity	Flux protection	G2RL-1A-E	G2RL-1-E	---	---
	Fully sealed	G2RL-1A4-E	G2RL-14-E	---	---
High-sensitivity	Flux protection	G2RL-1A-H	G2RL-1-H	---	---

**Note:** When ordering, add the rated coil voltage to the model number.

Example: G2RL-1A DC12

\_\_\_\_\_ Rated coil voltage

## Model Number Legend

G2RL-□□□□-□  
1 2 3 4

### 1. Number of Poles

- 1: 1 pole
- 2: 2 poles

### 2. Contact Form

- None: □PDT
- A: □PST-NO

### 3. Enclosure Ratings

- None: Flux protection
- 4: Fully sealed

### 4. Classification

- None: General purpose
- E: High capacity (1 pole)
- H: High sensitivity (1 pole)

## Specifications

### Coils Ratings for General-purpose and High-capacity Models

Rated voltage	5 VDC	12 VDC	24 VDC	48 VDC
Rated current	80.0 mA	33.3 mA	16.7 mA	8.96 mA
Coil resistance	62.5 Ω	360 Ω	1,440 Ω	5,358 Ω
Must operate voltage	70% max. of the rated voltage			
Must release voltage	10% min. of the rated voltage			
Max. voltage	180% of rated voltage (at 23°C)			
Power consumption	Approx. 400 mW			Approx. 430 mW

**Note:** The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

## ■ Coils Ratings for High-sensitivity Models

Rated voltage	5 VDC	12 VDC	24 VDC
Rated current	50.0 mA	20.8 mA	10.42 mA
Coil resistance	100 Ω	576 Ω	2,304 Ω
Must operate voltage	75% max. of the rated voltage		
Must release voltage	10% min. of the rated voltage		
Max. voltage	180% of rated voltage (at 23°C)		
Power consumption	Approx. 250 mW		

Note: The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

## ■ Contact Ratings

Item	General-purpose Models		High-capacity Models	High-sensitivity Models
Number of poles	1 pole	2 poles	1 pole	1 pole
Contact material	Ag Alloy (Cd free)			
Load	Resistive load (cosφ=1)			
Rated load	12 A at 250 VAC 12 A at 24 VDC (See note.)	8 A at 250 VAC 8 A at 30 VDC (See note.)	16 A at 250 VAC 16 A at 30 VDC (See note.)	10 A at 250 VAC 10 A at 24 VDC (See note.)
Rated carry current	12 A (See note.)	8 A (70°C)/5 A (85°C) (See note.)	16 A (See note.)	10 A (See note.)
Max. switching voltage	440 VAC, 300 VDC			
Max. switching current	12 A	8 A	16 A	10 A
Max. switching power	3,000 VA (4,000 VA)	2,000 VA	4,000 VA	2,500 VA

Note: Contact your OMRON representative for the ratings on fully sealed models.

## ■ Characteristics

Item	General-purpose (High-capacity) Models	General-purpose Models	High-sensitivity Models
Number of poles	1 pole	2 pole	1 pole
Contact resistance	100 mΩ max.		
Operate (set) time	15 ms max.		
Release (reset) time	5 ms max.		
Max. operating frequency	Mechanical:18,000 operation/hr Electrical:1,800 operation/hr at rated load		
Insulation resistance	1,000 MΩ min. (at 500 VDC)		
Dielectric strength	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 2,500 VAC, 1 min between contacts of different polarity 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity
Impulse withstand voltage	10 kV (1.2×50 μs) between coil and contact		
Vibration resistance	Destruction:10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) Malfunction:10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)		
Shock resistance	Destruction:1,000 m/s <sup>2</sup> (approx. 100 G) Malfunction:100 m/s <sup>2</sup> (approx. 10 G)		
Endurance (Mechanical)	20,000,000 operations (at 18,000 operations/hr)		
Ambient temperature	Operating:−40°C to 85°C (with no icing) Storage:−40°C to 85°C (with no icing)		
Ambient humidity	5% to 85%		
Weight	Approx. 12 g		

Note: Values in the above table are the initial values.