

**Keyword:**  
 Standard Use and Stand-By

**Model:** SL-360

**Performance Data** **Size AA**  
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl <sub>2</sub>
Nominal voltage	3.6 V
Nominal capacity	2.4 Ah
Nominal current	2 mA
Max. continuous discharge current	20 mA
Anode surface area	14 cm <sup>2</sup>
Lithium content	0.65 g
Weight	18 g
Volume	8.0 cm <sup>3</sup>
Temperature range	-55...+85 °C

**WARNING:**  
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety



Typical Discharge Curves at +25°C

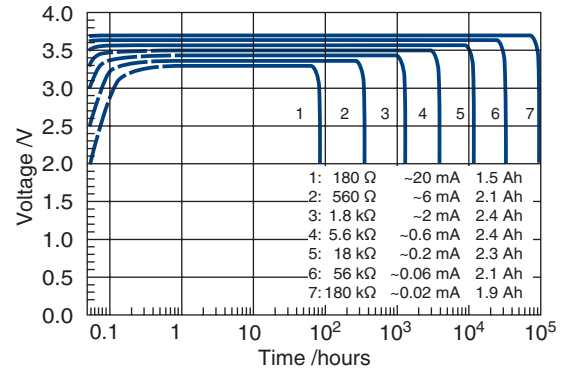

Available Capacity

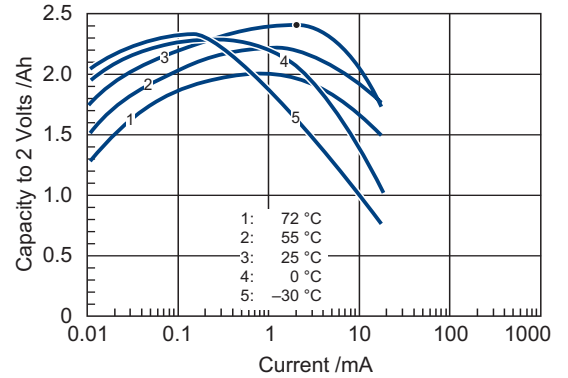

Operating Voltage

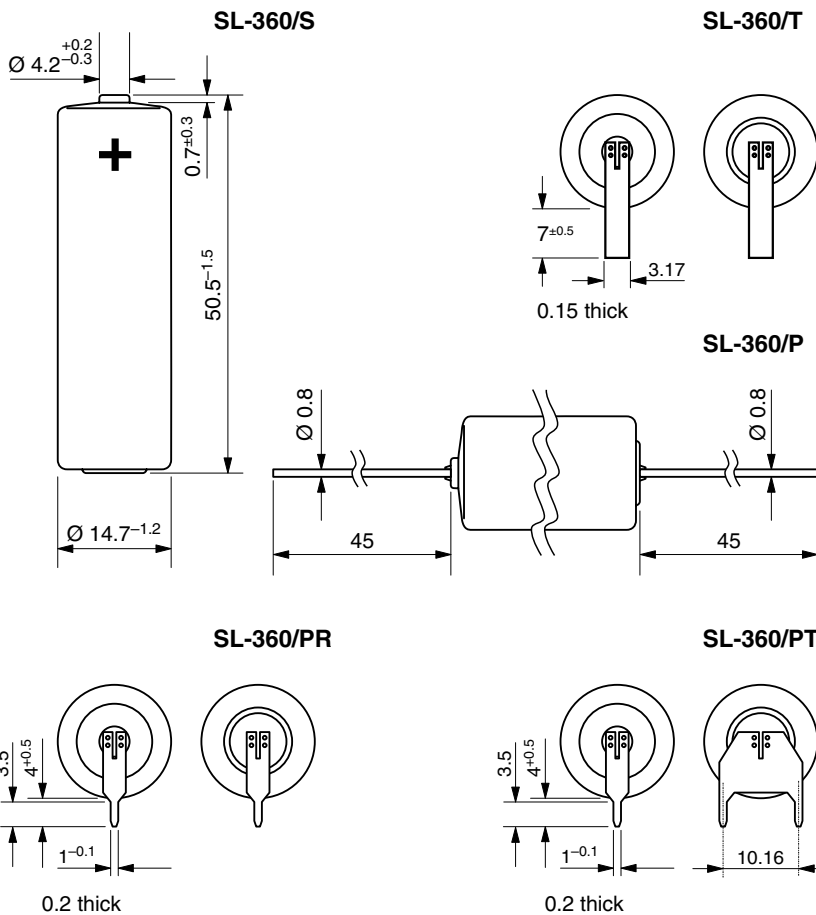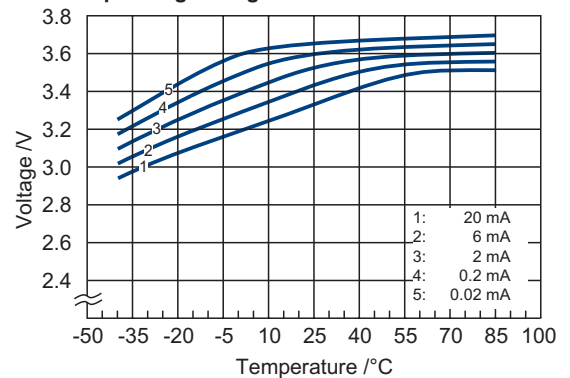

**Available Terminations**

SL-360/S	Standard
SL-360/T	Tags
SL-360/P	Pins
SL-360/PR	Pins Radial
SL-360/PT	Polarized Tags

**Catalogue No.**

11 1 03601 00
11 1 03602 00
11 1 03603 00
11 1 03606 00
11 1 03608 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.