FUSES FOR SEMICONDUCTOR PROTECTION

EUROPEAN STANDARD

SIZES 000 AND 00

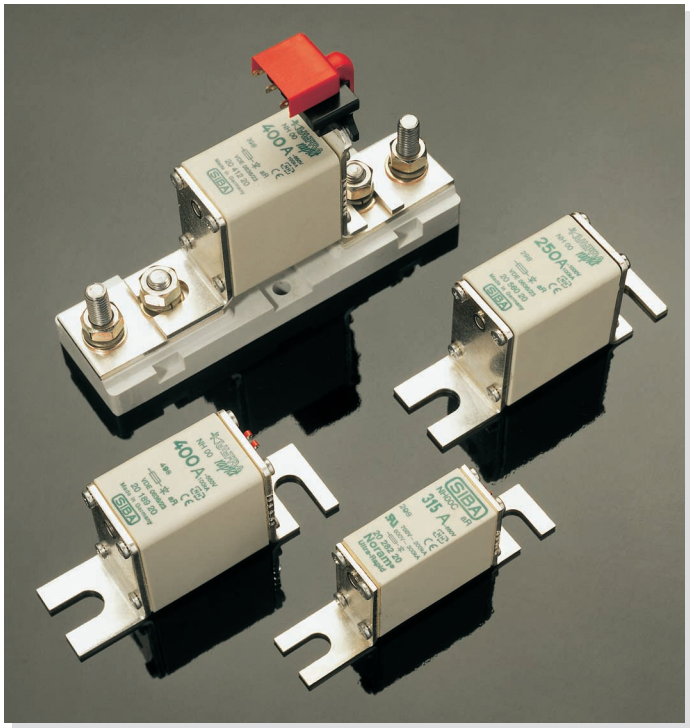

Class:	aR
Voltage rating:	AC 660 V – AC 1000 V
Current rating:	10 A to 400 A
Approvals:	
Standards:	DIN 43653
	IEC 60269-1 and -4
	DIN VDE 0636-40
	UL 248-13

Features / Benefits

- Extremely high interrupting rating 100 kA – 300 kA
- Voltage rating AC 660 V – AC 1000 V
- Protection of Power Semiconductors according to IEC 60269-1 and -4
- Complies with DIN 43653 – sizes 000 and 00
  with or without Topindicator and trip microswitch
- aR class 10 A – 400 A according to IEC 60269-4 and DIN VDE 0636-40
- Fuse Bases and Accessories are available

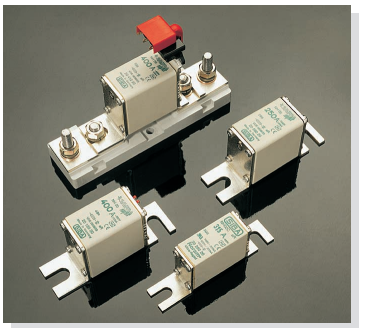

FUSES FOR SEMICONDUCTOR PROTECTION

EUROPEAN STANDARD **SIZES 000 AND 00**

Selection Guide

Size	Rated Voltage AC	Fixing Center	Indicator *	Part No. Type	Selector Guide Page	Techn. Data Page
000	660 V	3,15“ (80 mm)	with Topindicator	20 282 04	URB 3	URB 10
000	660 V	3.15“ (80 mm)	without Topindicator	20 282 41	URB 3	URB 10
000	660 V	3.15“ (80 mm)	with microswitch fitting	20 558 04	URB 4	URB 10
000	690/700 V	3.15“ (80 mm)	with Topindicator	20 282 20	URB 3	URB 11
000	690/700 V	3.15“ (80 mm)	without Topindicator	20 282 21	URB 3	URB 11
000	690/700 V	3.15“ (80 mm)	with microswitch fitting	20 558 20	URB 4	URB 11
00	660 V	3.15“ (80 mm)	with Topindicator	20 189 04	URB 5	URB 12
00	660 V	3.15“ (80 mm)	without Topindicator	20 189 41	URB 5	URB 12
00	660 V	3.15“ (80 mm)	with microswitch fitting	20 412 04	URB 6	URB 12
00	690/700 V	3.15“ (80 mm)	with Topindicator	20 189 20	URB 5	URB 13
00	690/700 V	3.15“ (80 mm)	without Topindicator	20 189 21	URB 5	URB 13
00	690/700 V	3.15“ (80 mm)	with microswitch fitting	20 412 20	URB 7	URB 13
00	1000 V	3.15“ (80 mm)	with Topindicator	20 560 20	URB 8	URB 14
00	1000 V	3.15“ (80 mm)	without Topindicator	20 560 21	URB 8	URB 14
00	1000 V	3.15“ (80 mm)	with microswitch fitting	20 562 20	URB 9	URB 14
Fuse Base	1000 V			21 189 01		URB 15
Microswitch	250 V			28 002 05		URB 15

*** Minimum operating voltage for Topindicator 6.5 V**