


**Product data sheet**
**3RV1331-4EC10**

CIRCUIT-BREAKER N-RELEASE 416 A,  
 SIZE S2 STARTER PROTECTION,  
 50 KA SCREW CONNECTION STANDARD  
 BREAKING CAPACITY

**General technical details:**


Continuous current / rated value	32 A
Adjustable response current	
<ul style="list-style-type: none"> <li>• of the non-delayed short-circuit release</li> <li> <ul style="list-style-type: none"> <li>• initial value</li> <li>• final value</li> </ul> </li> </ul>	416 A 416 A
Switch-off capacity limit short-circuit current / at 400 V / rated value	50 kA
Type of voltage	AC/DC
Service power	
<ul style="list-style-type: none"> <li>• at AC-3 / at 400 V / rated value</li> <li>• for three-phase servomotors / rated value</li> </ul>	15 kW 15 kW
Number of poles	3
Number of NC contacts / for auxiliary contact	0
Number of NO contacts / for auxiliary contact	0
Number of change-over switches / for auxiliary contact	0
Product function / Overload protection	No

**Mechanical design:**

Design of the electrical connection / for main current circuit	screw-type terminals with box terminals
Type of fixing/fixation	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Product component / auxiliary switch	No
Size of the circuit-breaker	S2

**Ambient conditions:**

Protection class IP	IP20
---------------------	------

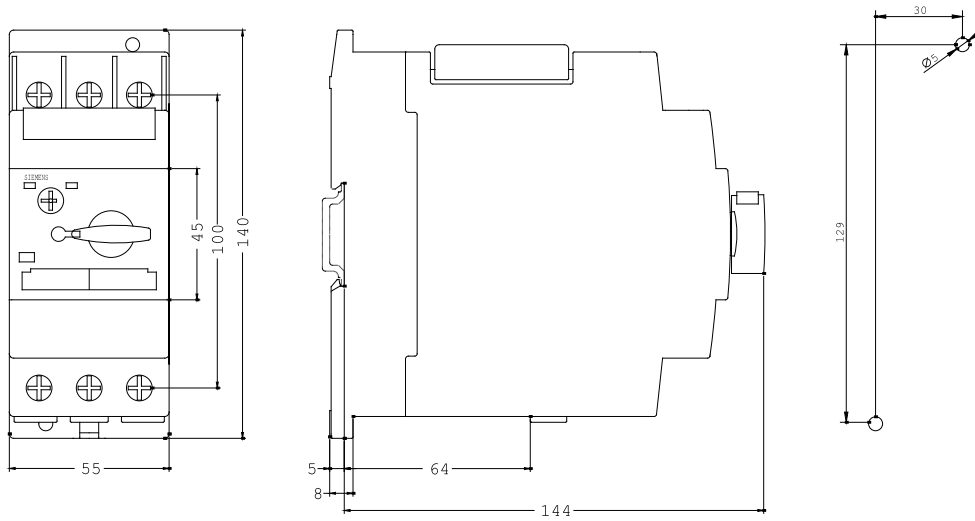

last change:

11/02/2006

**Technical Assistance:**

Telephone: +49 (0) 911-895-5900 (8°° - 17°° CET)

Fax: +49 (0) 911-895-5907

E-Mail: [technical-assistance@siemens.com](mailto:technical-assistance@siemens.com)

Internet: [www.siemens.de/lowvoltage/technical-assistance](http://www.siemens.de/lowvoltage/technical-assistance)