

# SINAMICS S120 drive system

## Booksize format for Line and Motor Modules

### Single Motor Modules in booksize format

#### Overview

A wide range of single-axis and two-axis Motor Modules with graded current/power ratings can be supplied:

- Single Motor Modules: Single-axis variant  
Booksize format with rated output currents of 3 A to 200 A
- Double Motor Modules: Two-axis variant  
Booksize format with rated output currents of 3 A to 18 A

In principle, all Single Motor and Double Motor Modules can be operated on Smart Line Modules or Active Line Modules for the corresponding voltage range.

#### Design



The Single Motor Modules in booksize format feature the following interfaces as standard:

- 2 DC link connections via integrated DC link busbars
- 1 electronics power supply connection via integrated 24 V DC busbars
- 3 DRIVE-CLiQ sockets
- 1 motor connection, plug-in (not included in scope of supply) or screw-stud depending on rated output current
- 1 safe standstill input (enable pulses)
- 1 safe motor brake control
- 1 temperature sensor input (KTY84-130 or PTC)
- 2 PE (protective earth) connections

The status of the Motor Modules is indicated via two multi-color LEDs.

The motor cable shield is inside the connector on 50 mm (1.97 in) and 100 mm (3.94 in) width modules. A shield connection kit can be supplied for 150 mm, 200 mm and 300 mm (5.91 in, 7.87 in and 11.81 in) wide modules. On these modules, the motor cable shield can be connected using a tube clip.

The signal cable shield can be connected to the Motor Module by means of a shield connection terminal, e.g. Weidmüller type KLBÜ 3-8 SC.

#### Design (continued)

The scope of supply of the Motor Modules includes:

- DRIVE-CLiQ cable (length depends on module width) to connect Motor Module to adjacent module
- Jumper for connecting the 24 V DC busbar to the adjacent Motor Module
- Connector X21
- Connector X11 for the motor brake connection (for Motor Modules with a rated output current of 45 A to 200 A)
- 2 blanking plugs for sealing unused DRIVE-CLiQ sockets
- Fan insert for the 132 A and 200 A Motor Modules (the voltage for the fan insert is supplied by the Motor Module)
- 1 set of warning signs in foreign languages

#### Integration

Single Motor Modules communicate with a CU320 Control Unit or SINUMERIK solution line via DRIVE-CLiQ.

#### Technical specifications

##### General technical specifications

|                                                                                                                                  |                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DC link voltage</b><br>Up to 2000 m (6562 ft) above sea level                                                                 | 510 ... 720 V DC<br>(line voltage 380 ... 480 V 3 AC)                                                                                                                                          |
| <b>Output frequency</b><br>• Control type Servo<br>• Control type Vector<br>• Control type V/f                                   | 0 ... 650 Hz <sup>1)</sup><br>0 ... 300 Hz <sup>1)</sup><br>0 ... 300 Hz <sup>1)</sup>                                                                                                         |
| <b>Electronics power supply</b>                                                                                                  | 24 V DC -15%/+20%                                                                                                                                                                              |
| <b>Type of cooling</b>                                                                                                           | <ul style="list-style-type: none"> <li>• Internal/external air cooling, power sections with increased air cooling by means of built-in fan</li> <li>• Cold-plate cooling on request</li> </ul> |
| <b>Permissible ambient or coolant temperature (air)</b><br>in operation for line-side components, Line Modules and Motor Modules | 0 ... 40 °C (32 ... 104 °F) without derating,<br>> 40 ... 55 °C (104 ... 131 °F), see derating characteristics                                                                                 |
| <b>Installation altitude</b>                                                                                                     | Up to 1000 m (3281 ft) above sea level without derating,<br>> 1000 ... 4000 m (3281 ... 13124 ft) above sea level, see derating characteristics                                                |
| <b>Conformity</b>                                                                                                                | CE (low-voltage and EMC directives)                                                                                                                                                            |
| <b>Approvals</b>                                                                                                                 | cULus (File No.: E192450)                                                                                                                                                                      |

<sup>1)</sup> Note correlation between max. output frequency, pulse frequency and current derating; see system description on the CD-ROM supplied with the catalog for further information.

# SINAMICS S120 drive system

## Booksize format for Line and Motor Modules

### Single Motor Modules in booksize format

#### Technical specifications (continued)

DC link voltage 510 ... 720 V DC

##### Order No.

|                        |                           |                           |                           |                           |                           |
|------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| • Internal air cooling | <b>6SL3120-1TE13-0AA3</b> | <b>6SL3120-1TE15-0AA3</b> | <b>6SL3120-1TE21-0AA3</b> | <b>6SL3120-1TE21-8AA3</b> | <b>6SL3120-1TE23-0AA3</b> |
| • External air cooling | <b>6SL3121-1TE13-0AA3</b> | <b>6SL3121-1TE15-0AA3</b> | <b>6SL3121-1TE21-0AA3</b> | <b>6SL3121-1TE21-8AA3</b> | <b>6SL3121-1TE23-0AA3</b> |

##### Product name

Single Motor Modules in booksize format

##### Output current

|                                     |   |     |     |     |      |      |
|-------------------------------------|---|-----|-----|-----|------|------|
| • Rated current $I_{\text{rated}}$  | A | 3   | 5   | 9   | 18   | 30   |
| • Base load current $I_{\text{H}}$  | A | 2.6 | 4.3 | 7.7 | 15.3 | 25.5 |
| • for S6 duty (40%) $I_{\text{S6}}$ | A | 3.5 | 6   | 10  | 24   | 40   |
| • $I_{\text{max}}$ , maximum        | A | 6   | 10  | 18  | 36   | 56   |

##### Power

|                              |         |           |           |         |          |           |
|------------------------------|---------|-----------|-----------|---------|----------|-----------|
| • with 600 V DC link voltage | kW (HP) | 1.6 (1.5) | 2.7 (3)   | 4.8 (5) | 9.7 (10) | 16.0 (20) |
| • based on $I_{\text{H}}$    | kW (HP) | 1.4 (1)   | 2.3 (2.5) | 4.1 (5) | 8.2 (10) | 13.7 (18) |

|                              |     |   |   |   |   |   |
|------------------------------|-----|---|---|---|---|---|
| <b>Rated pulse frequency</b> | kHz | 4 | 4 | 4 | 4 | 4 |
|------------------------------|-----|---|---|---|---|---|

|                                                        |   |     |   |    |    |    |
|--------------------------------------------------------|---|-----|---|----|----|----|
| <b>DC link current <math>I_{\text{d}}^{(1)}</math></b> | A | 3.6 | 6 | 11 | 22 | 36 |
|--------------------------------------------------------|---|-----|---|----|----|----|

##### Current capacity

|                                                                                                                                                                                                                                                                                   |   |     |     |     |     |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----|-----|-----|-----|-----|
| • 24 V DC busbars                                                                                                                                                                                                                                                                 | A | 20  | 20  | 20  | 20  | 20  |
| If, due to a number of Line and Motor Modules being mounted side-by-side, the current carrying capacity exceeds 20 A, an additional 24 V DC connection using a 24 V terminal adapter is required (connection cross-section, max. 6 mm <sup>2</sup> , fuse protection, max. 20 A). |   |     |     |     |     |     |
| • DC link busbars                                                                                                                                                                                                                                                                 | A | 100 | 100 | 100 | 100 | 100 |

|                            |    |     |     |     |     |     |
|----------------------------|----|-----|-----|-----|-----|-----|
| <b>DC link capacitance</b> | μF | 110 | 110 | 110 | 220 | 710 |
|----------------------------|----|-----|-----|-----|-----|-----|

|                                               |   |      |      |      |      |     |
|-----------------------------------------------|---|------|------|------|------|-----|
| <b>Current requirement with 24 V DC, max.</b> | A | 0.85 | 0.85 | 0.85 | 0.85 | 0.9 |
|-----------------------------------------------|---|------|------|------|------|-----|

##### Power loss

|                                                 |    |             |            |             |            |            |
|-------------------------------------------------|----|-------------|------------|-------------|------------|------------|
| • Internal air cooling                          | kW | 0.035       | 0.055      | 0.080       | 0.165      | 0.290      |
| • External air cooling int./ext. <sup>(2)</sup> | kW | 0.015/0.015 | 0.023/0.03 | 0.035/0.045 | 0.075/0.09 | 0.08/0.210 |

|                                |                                        |               |               |               |               |               |
|--------------------------------|----------------------------------------|---------------|---------------|---------------|---------------|---------------|
| <b>Cooling air requirement</b> | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.008 (0.283) | 0.008 (0.283) | 0.008 (0.283) | 0.008 (0.283) | 0.016 (0.565) |
|--------------------------------|----------------------------------------|---------------|---------------|---------------|---------------|---------------|

|                             |        |      |      |      |      |      |
|-----------------------------|--------|------|------|------|------|------|
| <b>Sound pressure level</b> | dB (A) | < 60 | < 60 | < 60 | < 60 | < 60 |
|-----------------------------|--------|------|------|------|------|------|

|                                       |                                                   |  |  |  |  |  |
|---------------------------------------|---------------------------------------------------|--|--|--|--|--|
| <b>Motor connection</b><br>U2, V2, W2 | Plug-in connector (X1) <sup>(3)</sup> , max. 30 A |  |  |  |  |  |
|---------------------------------------|---------------------------------------------------|--|--|--|--|--|

|                          |                              |  |  |  |  |  |
|--------------------------|------------------------------|--|--|--|--|--|
| <b>Shield connection</b> | Integrated in connector (X1) |  |  |  |  |  |
|--------------------------|------------------------------|--|--|--|--|--|

|                      |                          |  |  |  |  |  |
|----------------------|--------------------------|--|--|--|--|--|
| <b>PE connection</b> | On housing with M5 screw |  |  |  |  |  |
|----------------------|--------------------------|--|--|--|--|--|

|                               |                                                                |  |  |  |  |  |
|-------------------------------|----------------------------------------------------------------|--|--|--|--|--|
| <b>Motor brake connection</b> | Integrated into the plug-in motor connector (X1), 24 V DC, 2 A |  |  |  |  |  |
|-------------------------------|----------------------------------------------------------------|--|--|--|--|--|

##### Motor cable length, max.

|              |        |          |          |          |           |           |
|--------------|--------|----------|----------|----------|-----------|-----------|
| • Shielded   | m (ft) | 50 (164) | 50 (164) | 50 (164) | 70 (230)  | 70 (230)  |
| • Unshielded | m (ft) | 75 (246) | 75 (246) | 75 (246) | 100 (328) | 100 (328) |

|                             |      |      |      |      |      |      |
|-----------------------------|------|------|------|------|------|------|
| <b>Degree of protection</b> | IP20 | IP20 | IP20 | IP20 | IP20 | IP20 |
|-----------------------------|------|------|------|------|------|------|

##### Dimensions

|                                                                 |         |                    |                    |                    |                    |                    |
|-----------------------------------------------------------------|---------|--------------------|--------------------|--------------------|--------------------|--------------------|
| • Width                                                         | mm (in) | 50 (1.97)          | 50 (1.97)          | 50 (1.97)          | 50 (1.97)          | 100 (3.94)         |
| • Height                                                        | mm (in) | 380 (14.98)        | 380 (14.98)        | 380 (14.98)        | 380 (14.98)        | 380 (14.98)        |
| • Depth                                                         |         |                    |                    |                    |                    |                    |
| - with internal air cooling                                     | mm (in) | 270 (10.63)        | 270 (10.63)        | 270 (10.63)        | 270 (10.63)        | 270 (10.63)        |
| - with external air cooling in front of/behind mounting surface | mm (in) | 226/66.5 (8.9/2.6) | 226/66.5 (8.9/2.6) | 226/66.5 (8.9/2.6) | 226/66.5 (8.9/2.6) | 226/66.5 (8.9/2.6) |

##### Weight, approx.

|                             |         |          |          |          |          |          |
|-----------------------------|---------|----------|----------|----------|----------|----------|
| • with internal air cooling | kg (lb) | 5.0 (11) | 5.0 (11) | 5.0 (11) | 5.0 (11) | 6.9 (15) |
| • with external air cooling | kg (lb) | 5.7 (13) | 5.7 (13) | 5.7 (13) | 5.7 (13) | 8.5 (19) |

<sup>1)</sup> Rated DC link current for dimensioning an external DC connection. For DC link current calculation for dimensioning the Line Module, see system description "Power units/Line Modules" on the CD-ROM supplied with the catalog.

<sup>2)</sup> Power loss of Motor Module at rated power without losses of 24 V DC electronics power supply.

<sup>3)</sup> Not included in scope of supply, see Accessories.

# SINAMICS S120 drive system

## Booksize format for Line and Motor Modules

### Single Motor Modules in booksize format

#### Technical specifications (continued)

DC link voltage 510 ... 720 V DC

##### Ordering data

|                        |                    |                    |                    |                    |                    |
|------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| • Internal air cooling | 6SL3120-1TE24-5AA3 | 6SL3120-1TE26-0AA3 | 6SL3120-1TE28-5AA3 | 6SL3120-1TE31-3AA3 | 6SL3120-1TE32-0AA3 |
| • External air cooling | 6SL3121-1TE24-5AA3 | 6SL3121-1TE26-0AA3 | 6SL3121-1TE28-5AA3 | 6SL3121-1TE31-3AA3 | 6SL3121-1TE32-0AA3 |

##### Product name

Single Motor Modules in booksize format

##### Output current

|                                    |   |    |     |     |     |     |
|------------------------------------|---|----|-----|-----|-----|-----|
| • Rated current $I_{\text{rated}}$ | A | 45 | 60  | 85  | 132 | 200 |
| • Base load current $I_H$          | A | 38 | 51  | 68  | 105 | 141 |
| • for S6 duty (40%) $I_{S6}$       | A | 60 | 80  | 110 | 150 | 250 |
| • $I_{\text{max}}$ , maximum       | A | 85 | 113 | 141 | 210 | 282 |

##### Power

|                              |         |         |         |         |          |           |
|------------------------------|---------|---------|---------|---------|----------|-----------|
| • with 600 V DC link voltage | kW (HP) | 24 (30) | 32 (40) | 46 (60) | 71 (100) | 107 (150) |
| • based on $I_H$             | kW (HP) | 21 (25) | 28 (40) | 37 (50) | 57 (75)  | 76 (100)  |

|                              |     |   |   |   |   |   |
|------------------------------|-----|---|---|---|---|---|
| <b>Rated pulse frequency</b> | kHz | 4 | 4 | 4 | 4 | 4 |
|------------------------------|-----|---|---|---|---|---|

|                                              |   |    |    |     |     |     |
|----------------------------------------------|---|----|----|-----|-----|-----|
| <b>DC link current <math>I_d^{1)}</math></b> | A | 54 | 72 | 102 | 158 | 200 |
|----------------------------------------------|---|----|----|-----|-----|-----|

##### Current capacity

|                                                                                                                                                                                                                                                                                   |   |     |     |     |     |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----|-----|-----|-----|-----|
| • 24 V DC busbars                                                                                                                                                                                                                                                                 | A | 20  | 20  | 20  | 20  | 20  |
| If, due to a number of Line and Motor Modules being mounted side-by-side, the current carrying capacity exceeds 20 A, an additional 24 V DC connection using a 24 V terminal adapter is required (connection cross-section, max. 6 mm <sup>2</sup> , fuse protection, max. 20 A). |   |     |     |     |     |     |
| • DC link busbars                                                                                                                                                                                                                                                                 | A | 200 | 200 | 200 | 200 | 200 |

|                            |    |      |      |      |      |      |
|----------------------------|----|------|------|------|------|------|
| <b>DC link capacitance</b> | μF | 1175 | 1410 | 1880 | 2820 | 3995 |
|----------------------------|----|------|------|------|------|------|

|                                               |   |     |     |     |     |     |
|-----------------------------------------------|---|-----|-----|-----|-----|-----|
| <b>Current requirement with 24 V DC, max.</b> | A | 1.2 | 1.2 | 1.5 | 1.5 | 1.5 |
|-----------------------------------------------|---|-----|-----|-----|-----|-----|

##### Power loss

|                                                |    |            |             |           |          |          |
|------------------------------------------------|----|------------|-------------|-----------|----------|----------|
| • Internal air cooling in control cabinet      | kW | 0.43       | 0.59        | 0.75      | 1.25     | 2.05     |
| • External air cooling int./ext. <sup>2)</sup> | kW | 0.011/0.32 | 0.135/0.455 | 0.16/0.59 | 0.25/1.0 | 0.4/1.65 |

|                                |                                        |               |               |               |               |               |
|--------------------------------|----------------------------------------|---------------|---------------|---------------|---------------|---------------|
| <b>Cooling air requirement</b> | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.031 (1.095) | 0.031 (1.095) | 0.044 (1.554) | 0.144 (5.085) | 0.144 (5.085) |
|--------------------------------|----------------------------------------|---------------|---------------|---------------|---------------|---------------|

|                             |        |      |      |      |      |      |
|-----------------------------|--------|------|------|------|------|------|
| <b>Sound pressure level</b> | dB (A) | < 65 | < 65 | < 60 | < 73 | < 73 |
|-----------------------------|--------|------|------|------|------|------|

|                                       |                 |                      |                      |                      |                      |                      |
|---------------------------------------|-----------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <b>Motor connection</b><br>U2, V2, W2 |                 | M6 screw studs, (X1) | M6 screw studs, (X1) | M8 screw studs, (X1) | M8 screw studs, (X1) | M8 screw studs, (X1) |
| • Conductor cross-section             | mm <sup>2</sup> | 2.5 ... 50           | 2.5 ... 50           | 2.5 ... 95, 2 × 35   | 2.5 ... 120, 2 × 50  | 2.5 ... 120, 2 × 50  |

|                          |  |                 |                 |                 |                 |                 |
|--------------------------|--|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>Shield connection</b> |  | See Accessories | See Accessories | See Accessories | See Accessories | See Accessories |
|--------------------------|--|-----------------|-----------------|-----------------|-----------------|-----------------|

|                      |  |                          |                          |                          |                          |                          |
|----------------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <b>PE connection</b> |  | On housing with M6 screw | On housing with M6 screw | On housing with M6 screw | On housing with M8 screw | On housing with M8 screw |
|----------------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|

|                               |  |                                       |                                       |                                       |                                       |                                       |
|-------------------------------|--|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| <b>Motor brake connection</b> |  | Plug-in connector (X11), 24 V DC, 2 A | Plug-in connector (X11), 24 V DC, 2 A | Plug-in connector (X11), 24 V DC, 2 A | Plug-in connector (X11), 24 V DC, 2 A | Plug-in connector (X11), 24 V DC, 2 A |
|-------------------------------|--|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|

|                                 |        |           |           |           |           |           |
|---------------------------------|--------|-----------|-----------|-----------|-----------|-----------|
| <b>Motor cable length, max.</b> |        |           |           |           |           |           |
| • Shielded                      | m (ft) | 100 (328) | 100 (328) | 100 (328) | 100 (328) | 100 (328) |
| • Unshielded                    | m (ft) | 150 (492) | 150 (492) | 150 (492) | 150 (492) | 150 (492) |

|                             |  |      |      |      |      |      |
|-----------------------------|--|------|------|------|------|------|
| <b>Degree of protection</b> |  | IP20 | IP20 | IP20 | IP20 | IP20 |
|-----------------------------|--|------|------|------|------|------|

##### Dimensions

|                                                                 |         |                  |                  |                  |                                                  |                                                  |
|-----------------------------------------------------------------|---------|------------------|------------------|------------------|--------------------------------------------------|--------------------------------------------------|
| • Width                                                         | mm (in) | 150 (5.91)       | 150 (5.91)       | 200 (7.87)       | 300 (11.81)                                      | 300 (11.81)                                      |
| • Height                                                        | mm (in) | 380 (14.96)      | 380 (14.96)      | 380 (14.96)      | 380, (14.96) with fan <sup>3)</sup> : 629 (24.8) | 380, (14.96) with fan <sup>3)</sup> : 629 (24.8) |
| • Depth                                                         |         |                  |                  |                  |                                                  |                                                  |
| - with internal air cooling                                     | mm (in) | 270 (10.63)      | 270 (10.63)      | 270 (10.63)      | 270 (10.63)                                      | 270 (10.63)                                      |
| - with external air cooling in front of/behind mounting surface | mm (in) | 226/71 (8.9/2.8) | 226/71 (8.9/2.8) | 226/92 (8.9/3.6) | 226/82 (8.9/3.2)                                 | 226/82 (8.9/3.2)                                 |

##### Weight, approx.

|                             |         |           |           |           |           |         |
|-----------------------------|---------|-----------|-----------|-----------|-----------|---------|
| • with internal air cooling | kg (lb) | 9 (20)    | 9 (20)    | 15 (33)   | 21 (46)   | 21 (46) |
| • with external air cooling | kg (lb) | 13.2 (29) | 13.4 (30) | 17.2 (38) | 27.2 (60) | 30 (66) |

<sup>1)</sup> Rated DC link current for dimensioning an external DC connection.

For DC link current calculation for dimensioning the Line Module, see system description "Power units/Line Modules" on the CD-ROM supplied with the catalog.

<sup>2)</sup> Power loss of Motor Module at rated power without losses of 24 V DC electronics power supply.

<sup>3)</sup> The fan is supplied with the Motor Module and must be installed before the Motor Module is commissioned.

# SINAMICS S120 drive system

## Booksize format for Line and Motor Modules

### Single Motor Modules in booksize format

#### Selection and Ordering Data

| Rated output current             | Rated power        | Single Motor Module in booksize format |                      |
|----------------------------------|--------------------|----------------------------------------|----------------------|
|                                  |                    | Internal air cooling                   | External air cooling |
|                                  |                    | Order No.                              | Order No.            |
| DC link voltage 510 ... 720 V DC |                    |                                        |                      |
| 3 A                              | 1.6 kW<br>(1.5 HP) | 6SL3120-1TE13-0AA3                     | 6SL3121-1TE13-0AA3   |
| 5 A                              | 2.7 kW<br>(3 HP)   | 6SL3120-1TE15-0AA3                     | 6SL3121-1TE15-0AA3   |
| 9 A                              | 4.8 kW<br>(5 HP)   | 6SL3120-1TE21-0AA3                     | 6SL3121-1TE21-0AA3   |
| 18 A                             | 9.7 kW<br>(10 HP)  | 6SL3120-1TE21-8AA3                     | 6SL3121-1TE21-8AA3   |
| 30 A                             | 16 kW<br>(20 HP)   | 6SL3120-1TE23-0AA3                     | 6SL3121-1TE23-0AA3   |
| 45 A                             | 24 kW<br>(30 HP)   | 6SL3120-1TE24-5AA3                     | 6SL3121-1TE24-5AA3   |
| 60 A                             | 32 kW<br>(40 HP)   | 6SL3120-1TE26-0AA3                     | 6SL3121-1TE26-0AA3   |
| 85 A                             | 46 kW<br>(60 HP)   | 6SL3120-1TE28-5AA3                     | 6SL3121-1TE28-5AA3   |
| 132 A                            | 71 kW<br>(100 HP)  | 6SL3120-1TE31-3AA3                     | 6SL3121-1TE31-3AA3   |
| 200 A                            | 107 kW<br>(150 HP) | 6SL3120-1TE32-0AA3                     | 6SL3121-1TE32-0AA3   |

#### Accessories

| Designation                                                                                                                                                                                        | Order No.                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>Power connector (X1/X2)</b><br>At Motor Module end,<br>with screw-type terminals<br>1.5 ... 10 mm <sup>2</sup> ,<br>For Motor Modules with a rated<br>output current of 3 ... 30 A              | <b>6SL3162-2MA00-0AA0</b> |
| <b>Shield connection plates<br/>for Line/Motor Modules<br/>in booksize format</b>                                                                                                                  |                           |
| • 150 mm (5.91 in) wide                                                                                                                                                                            |                           |
| - Internal air cooling                                                                                                                                                                             | <b>6SL3162-1AF00-0AA1</b> |
| - External air cooling                                                                                                                                                                             | <b>6SL3162-1AF00-0BA0</b> |
| • 200 mm (7.87 in) wide                                                                                                                                                                            |                           |
| - Internal air cooling                                                                                                                                                                             | <b>6SL3162-1AH01-0AA0</b> |
| - External air cooling                                                                                                                                                                             | <b>6SL3162-1AH01-0BA0</b> |
| • 300 mm (11.81 in) wide                                                                                                                                                                           |                           |
| - Internal/external air cooling                                                                                                                                                                    | <b>6SL3162-1AH00-0AA0</b> |
| <b>DC link rectifier adapter</b><br>For direct infeed of DC link<br>voltage                                                                                                                        |                           |
| • Screw-type terminals<br>0.5 ... 10 mm <sup>2</sup><br>for Line Modules and Motor<br>Modules in booksize format with<br>a width of 50 mm (1.97 in) or<br>100 mm (3.94 in)                         | <b>6SL3162-2BD00-0AA0</b> |
| • Screw-type terminals<br>35 ... 95 mm <sup>2</sup><br>for Line Modules and Motor<br>Modules in booksize format with<br>a width of 150 mm, 200 mm and<br>300 mm (5.91 in, 7.87 in and<br>11.81 in) | <b>6SL3162-2BM00-0AA0</b> |

#### Accessories (continued)

| Designation                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Order No.                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>DC link adapters</b><br>(2 units)<br>For multi-tier configuration<br>Screw-type terminals<br>35 ... 95 mm <sup>2</sup><br>For all Line Modules and Motor<br>Modules in booksize format                                                                                                                                                                                                                                                                     | <b>6SL3162-2BM01-0AA0</b> |
| <b>24 V terminal adapter</b><br>For all Line Modules and Motor<br>Modules in booksize format                                                                                                                                                                                                                                                                                                                                                                  | <b>6SL3162-2AA00-0AA0</b> |
| <b>24 V jumper</b><br>For connection of the 24 V<br>busbars for booksize format                                                                                                                                                                                                                                                                                                                                                                               | <b>6SL3162-2AA01-0AA0</b> |
| <b>DC link busbar kit<br/>reinforced</b><br>For replacement for DC link<br>busbars for 5 modules in<br>booksize format                                                                                                                                                                                                                                                                                                                                        |                           |
| • 50 mm (1.97 in) wide                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>6SL3162-2DB00-0AA0</b> |
| • 100 mm (3.94 in) wide                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>6SL3162-2DD00-0AA0</b> |
| <b>Warning signs in foreign<br/>languages</b><br>This set of foreign language<br>warning signs can be placed<br>on top of the standard English<br>or German signs.<br>A set of signs is supplied with<br>the units.<br>One sign in each of the following<br>languages is provided in each<br>set:<br>Chinese, Czech, Danish, Dutch,<br>Finnish, French, Greek, Italian,<br>Japanese, Korean, Polish,<br>Portuguese, Russian, Spanish,<br>Swedish and Turkish. | <b>6SL3166-3AB00-0AA0</b> |


# SINAMICS S120 drive system

## Booksize format for Line and Motor Modules


### Single Motor Modules in booksize format

#### Characteristic curves


##### Overload capability

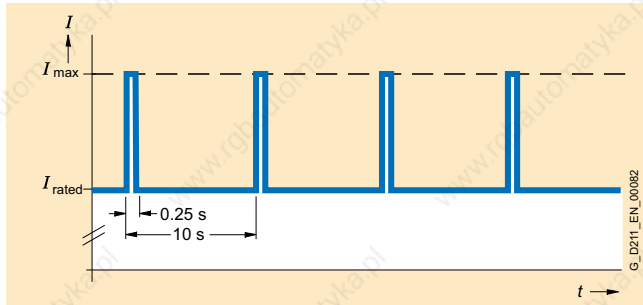


Duty cycle with previous load

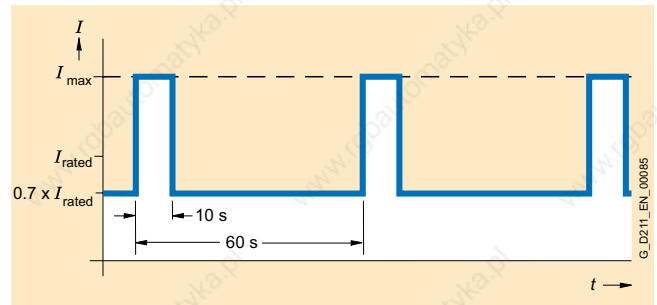


S6 duty cycle with previous load with a duty cycle duration of 60 s

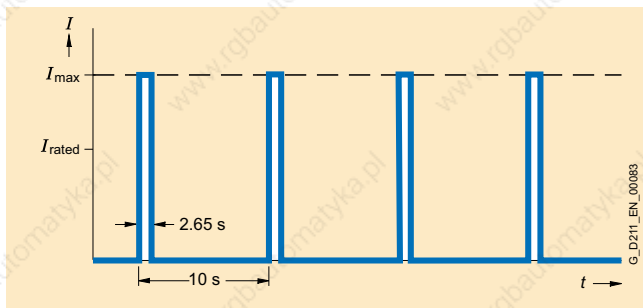


Duty cycle without previous load

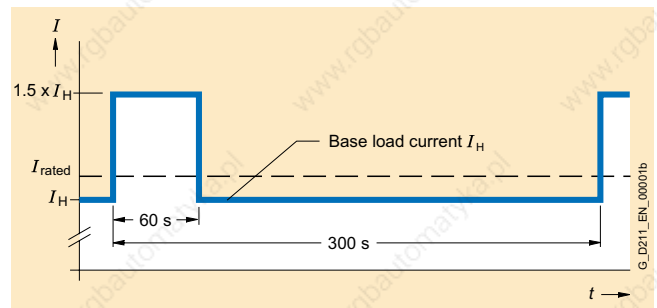

Duty cycle with 60 s overload with a duty cycle duration of 300 s

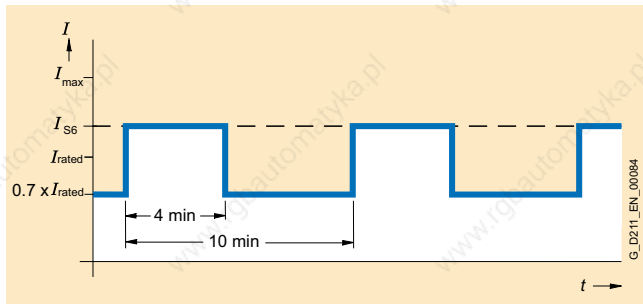

S6 duty cycle with previous load with a duty cycle duration of 600 s

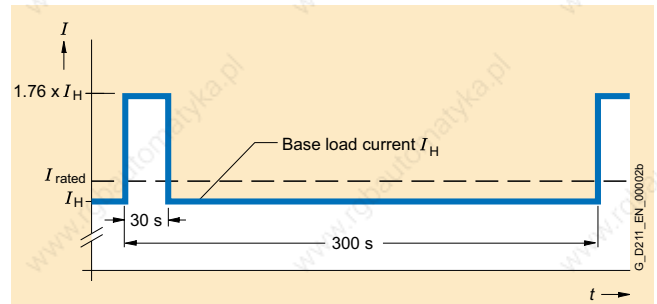

Duty cycle with 30 s overload with a duty cycle duration of 300 s




# SINAMICS S120 drive system

## Booksize format for Line and Motor Modules


### Single Motor Modules in booksize format

#### Characteristic curves (continued)


##### Derating characteristics

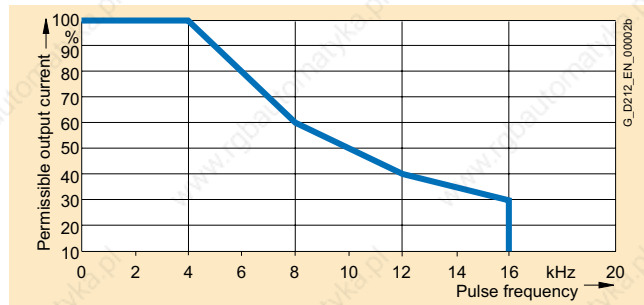


Output current dependent on pulse frequency

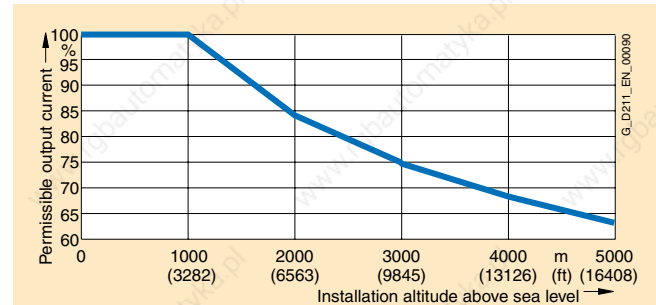

Output current dependent on installation altitude

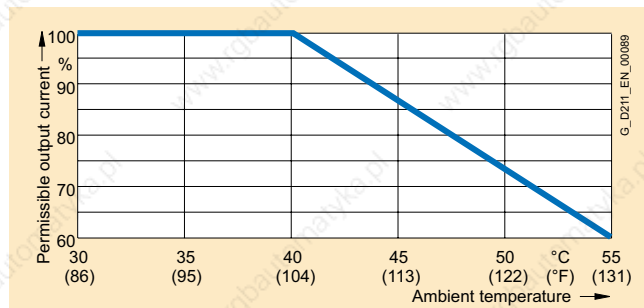

Output current dependent on ambient temperature

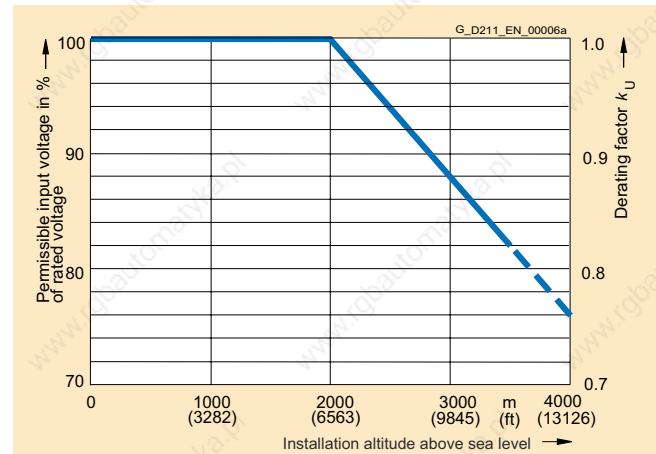

Voltage derating dependent on pulse frequency