



## Maximum Ratings (Ta = 25°C)







Characteristic		Symbol	Rating	Unit
Collector-emitter voltage		V <sub>CES</sub>	600	V
Gate-emitter voltage		V <sub>GES</sub>	± 20	V
Collector current	DC	I <sub>C</sub>	15	A
	1ms	I <sub>CP</sub>	30	
Forward current	DC	I <sub>F</sub>	15	A
	1ms	I <sub>FM</sub>	30	
Collector power dissipation (T <sub>c</sub> = 25°C)		P <sub>C</sub>	55	W
Junction temperature		T <sub>j</sub>	150	°C
Storage temperature range		T <sub>stg</sub>	-40 ~ 125	°C
Isolation voltage		V <sub>isol</sub>	2500 (AC 1 minute)	V
Screw torque		—	1.5	N·m







## Electrical Characteristics (Ta = 25°C)



Characteristic		Symbol	Test Condition	Min	Typ.	Max	Unit
Gate leakage current		I <sub>GES</sub>	V <sub>GE</sub> = ± 20V, V <sub>CE</sub> = 0	—	—	± 20	μA
Collector cut-off current		I <sub>CES</sub>	V <sub>CE</sub> = 600V, V <sub>GE</sub> = 0	—	—	1.0	mA
Gate-emitter cut-off voltage		V <sub>GE (off)</sub>	I <sub>C</sub> = 15mA, V <sub>CE</sub> = 5V	3.0	—	6.0	V
Collector-emitter saturation voltage		V <sub>CE (sat)</sub>	I <sub>C</sub> = 15A, V <sub>GE</sub> = 15V	—	3.0	4.0	V
Input capacitance		C <sub>ies</sub>	V <sub>CE</sub> = 10V, V <sub>GE</sub> = 0, f = 1MHz	—	1000	—	pF
Switching time	Rise time	t <sub>r</sub>		—	0.3	0.6	μs
	Turn-on time	t <sub>on</sub>		—	0.4	0.8	
	Fall time	t <sub>f</sub>		—	0.2	0.35	
	Turn-off time	t <sub>off</sub>		—	0.5	1.0	
Forward voltage		V <sub>F</sub>	I <sub>F</sub> = 15A, V <sub>GE</sub> = 0	—	1.7	2.5	V
Reverse recovery time		t <sub>rr</sub>	I <sub>F</sub> = 15A, V <sub>GE</sub> = -10V di / dt = 50A / μs	—	0.08	0.15	μs
Thermal resistance	R <sub>th (j-c)</sub>	Transistor	—	—	2.27	°C / W	
		Diode	—	—	3.09		

000707EAA2

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

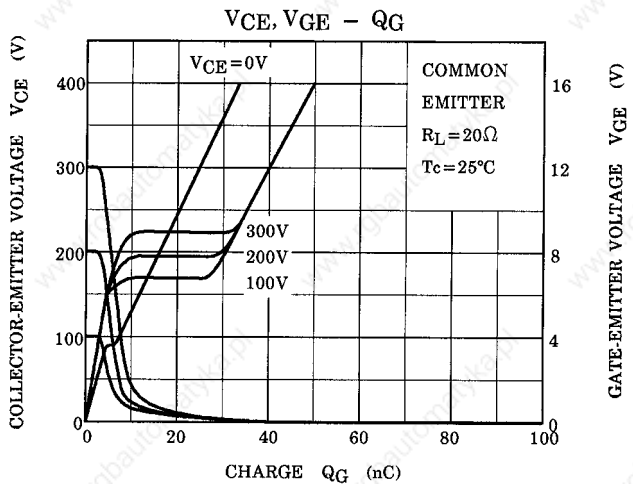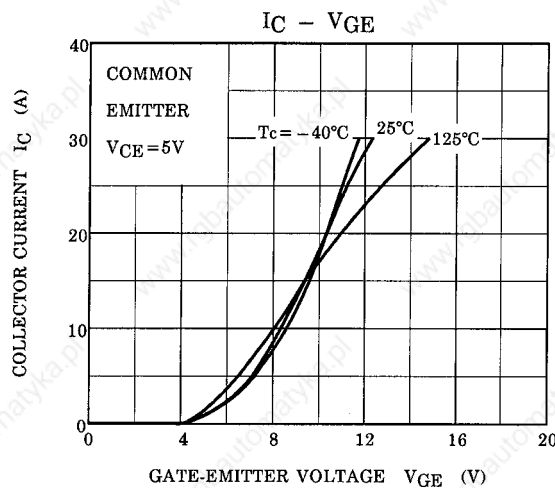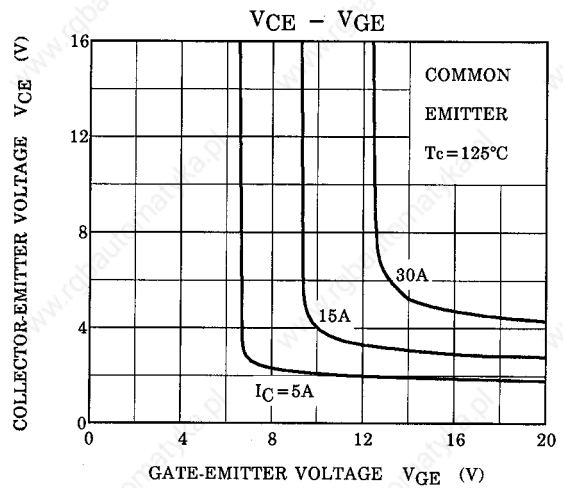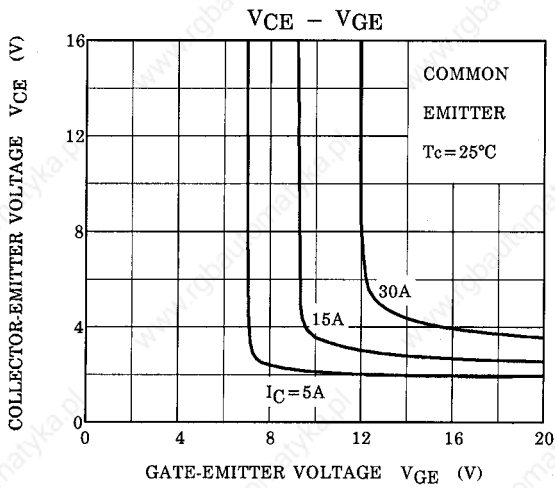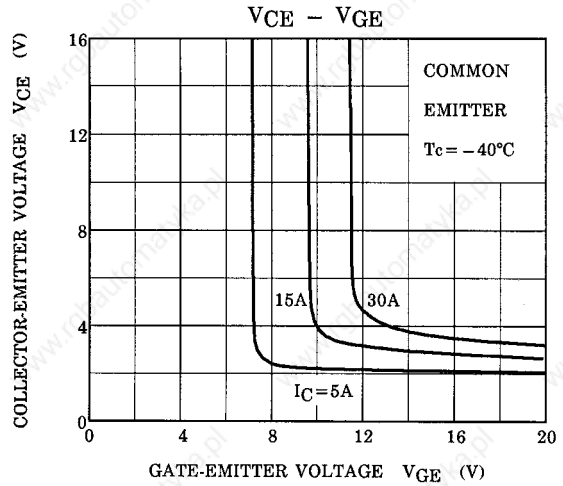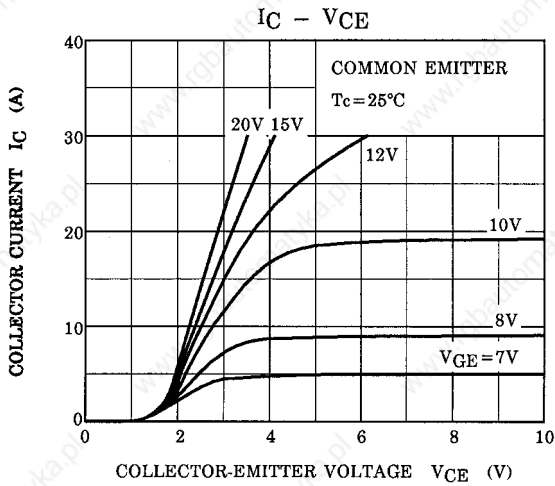

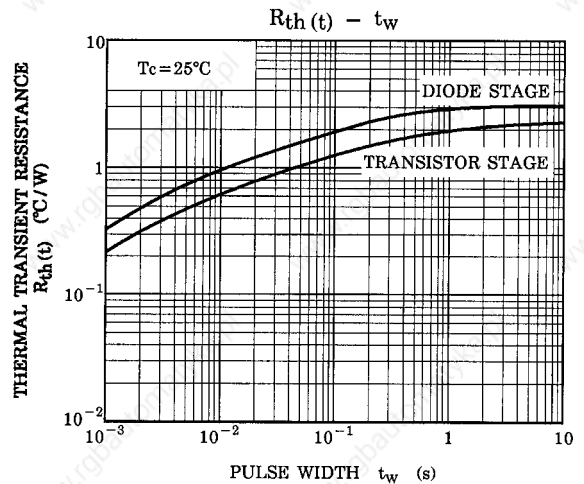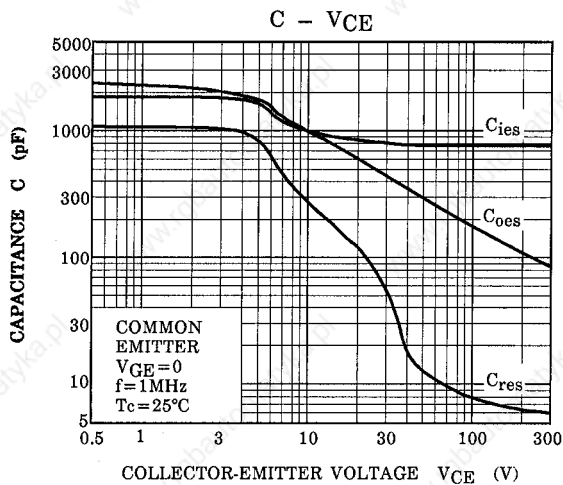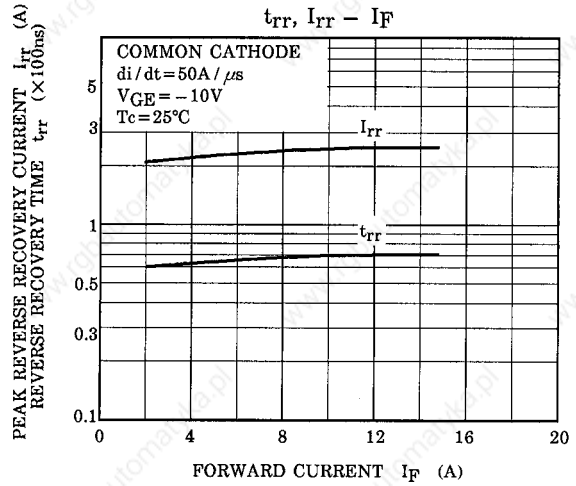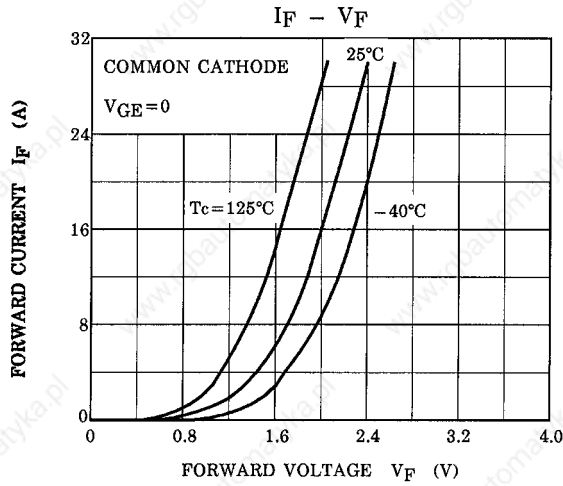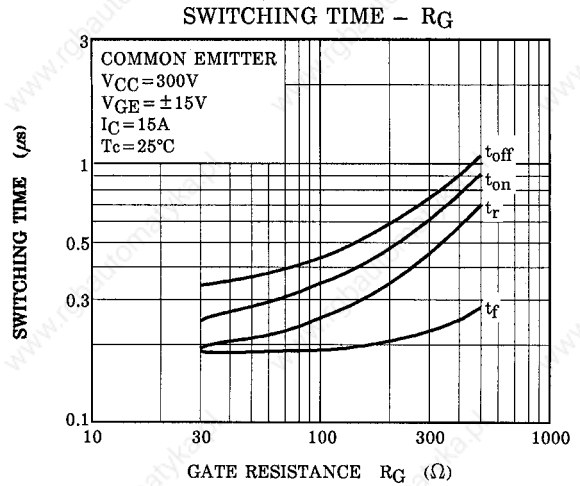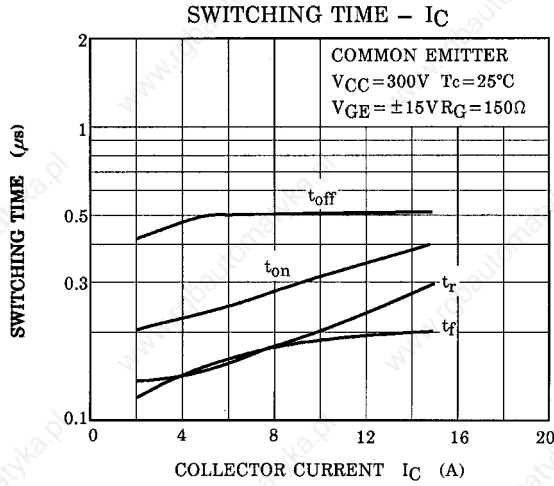

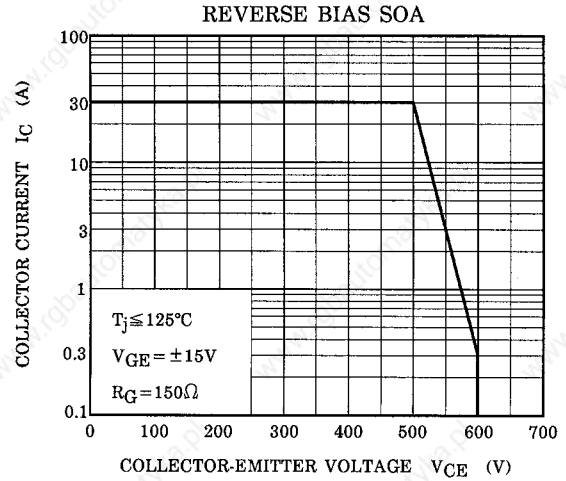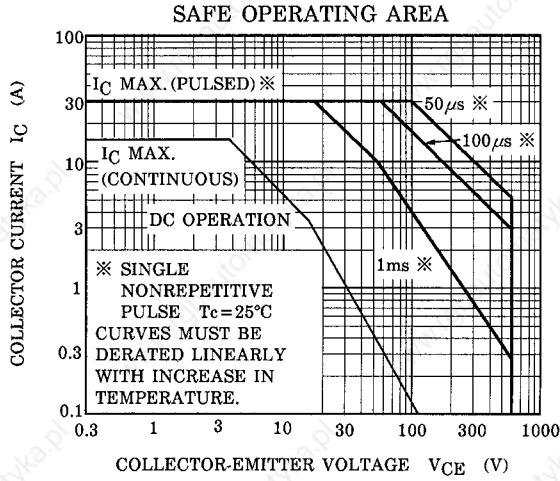

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.