

# DATASHEET

**POWEREX**

**KD421K10**

**OTHER SYMBOLS:**

**RGB ELEKTRONIKA AGACIAK CIACIEK  
SPÓŁKA JAWNA**

Jana Długosza 2-6 Street  
51-162 Wrocław  
Poland

✉ [biuro@rgbelektronika.pl](mailto:biuro@rgbelektronika.pl)

☎ +48 71 325 15 05



[www.rgbelektronika.pl](http://www.rgbelektronika.pl)



[www.rgbautomatyka.pl](http://www.rgbautomatyka.pl)

# YOUR PARTNER IN MAINTENANCE

Repair **this product** with RGB ELEKTRONIKA

[ORDER A DIAGNOSIS »](#)





At our premises in Wrocław, we have a fully equipped servicing facility. Here we perform all the repair works and test each later sold unit. Our trained employees, equipped with a wide variety of tools and having several testing stands at their disposal, are a guarantee of the highest quality service.

Buy **this product** at RGB AUTOMATYKA

[BUY »](#)

### Dual Darlington Transistor Module 100 Amperes/1000 Volts

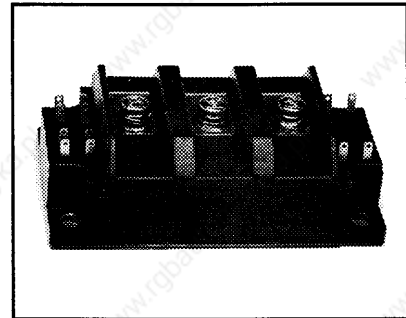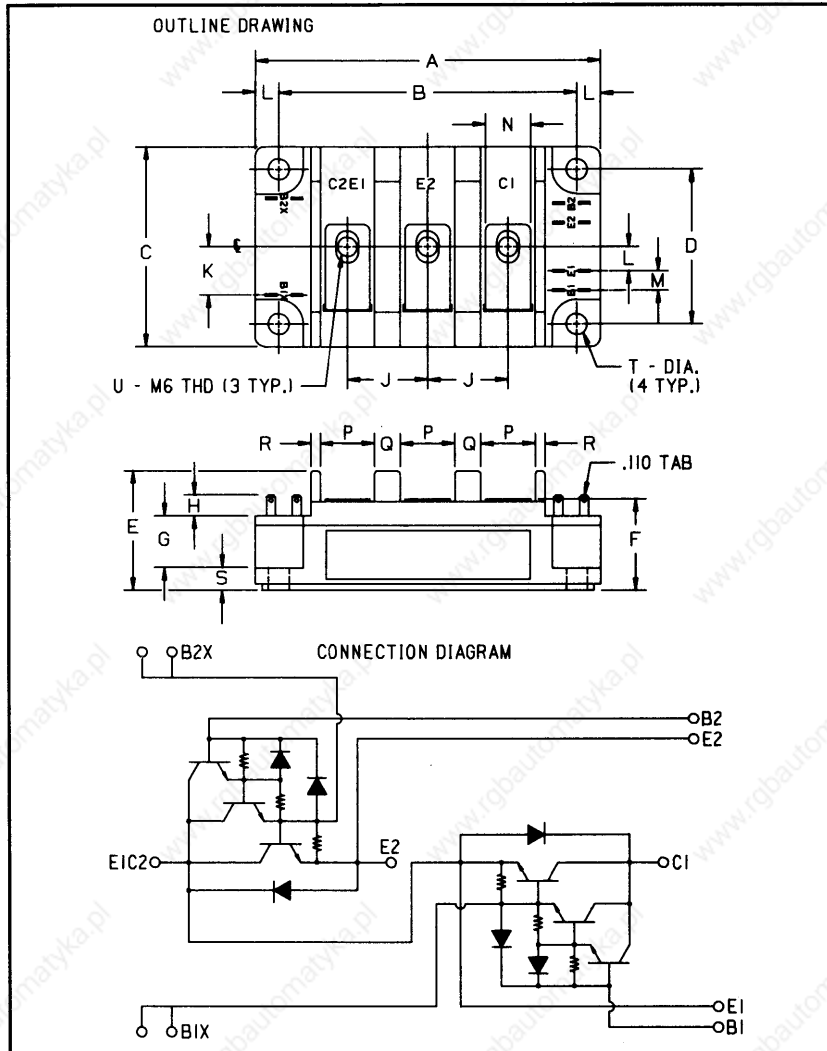

#### Description:

The Powerex Dual Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of two Darlington Transistors with each transistor having a reverse parallel connected high-speed diode.

#### Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feedback Diode
- High Gain ( $h_{FE}$ )
- Quick Connect Base-Emitter Signal Terminals
- Base-Emitter Speed-up Diodes

#### Applications:

- AC Motor Control
- DC Motor Control
- Switching Power Supplies
- Inverters

#### Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KD421K10 is a 1000 Volt, 100 Ampere Dual Darlington Module.

Outline Drawing

Dimensions	Inches	Millimeters
A	4.252 Max.	108 Max.
B	3.661 ± 0.012	93 ± 0.3
C	2.441 Max.	62 Max.
D	1.890 ± 0.012	48 ± 0.3
E	1.457	37
F	1.181 Max.	30 Max.
G	0.630	16
H	0.256 Min.	6.5 Min.
J	0.984	25
K	0.591	15

Dimensions	Inches	Millimeters
L	0.295	7.5
M	0.236	6
N	0.551	14
P	0.669	17
Q	0.315	8
R	0.118	3
S	0.276	7
T	0.256 Dia.	6.5 Dia.
U	M6 Metric	M6

Type	V <sub>CEO(sus)</sub> Volts (1000)	Current Rating Amperes (X 10)
KD42	1K	10



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD421K10**  
**Dual Darlington Transistor Module**  
 100 Amperes/1000 Volts

**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	KD421K10	Units
Junction Temperature	$T_j$	-40 to 150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage, $V_{BE} = -2\text{V}$	$V_{CEV(sus)}$	1000	Volts
Collector-Base Voltage	$V_{CBO}$	1000	Volts
Emitter-Base Voltage	$V_{EBO}$	7	Volts
Collector-Emitter Voltage, $V_{BE} = -2\text{V}$	$V_{CEV}$	1000	Volts
Continuous Collector Current	$I_C$	100	Amperes
Diode Forward Current	$I_{FM}$	100	Amperes
Continuous Base Current	$I_B$	5	Amperes
Diode Surge Current	$I_{FSM}$	1000	Amperes
Power Dissipation (Each Transistor)	$P_t$	800	Watts
Max. Mounting Torque M6 Terminal Screws	—	26	in.-lb.
Max. Mounting Torque M6 Mounting Screws	—	26	in.-lb.
Module Weight (Typical)	—	470	Grams
V Isolation	$V_{RMS}$	2500	Volts

**Electrical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Collector Cutoff Current	$I_{CEV}$	$V_{CE} = 1000\text{V}, V_{BE} = -2\text{V}$	—	—	2	mA	
		$V_{CE} = 1000\text{V}, V_{BE} = -2\text{V}, T_C = 125^\circ\text{C}$	—	—	20	mA	
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 7\text{V}$	—	—	400	mA	
DC Current Gain	$h_{FE}$	$I_C = 100\text{A}, V_{CE} = 5\text{V}$	100	—	—	—	
Diode Forward Voltage	$V_{FM}$	$I_{FM} = 100\text{A}$	—	—	1.8	Volts	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 100\text{A}, I_B = 2\text{A}$	—	—	2.5	Volts	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 100\text{A}, I_B = 2\text{A}$	—	—	3.5	Volts	
Resistive	Turn-on	$t_{on}$	$V_{CC} = 600\text{V}$	—	—	3.0	$\mu\text{s}$
Load	Storage Time	$t_s$	$I_C = 100\text{A}$	—	—	15	$\mu\text{s}$
Switch Times	Fall Time	$t_f$	$I_{B1} = 2\text{A}, I_{B2} = -2\text{A}$	—	—	3.0	$\mu\text{s}$










**Thermal and Mechanical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case-to-Sink	$R_{\theta(c-s)}$	Per Half Module	—	—	0.075	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Transistor Part	—	—	0.155	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Diode Part	—	—	0.65	$^\circ\text{C/W}$



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD421K10**  
**Dual Darlington Transistor Module**  
100 Amperes/1000 Volts

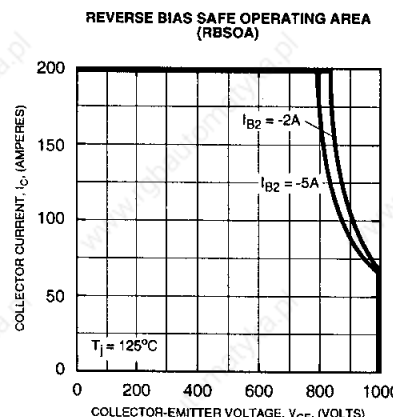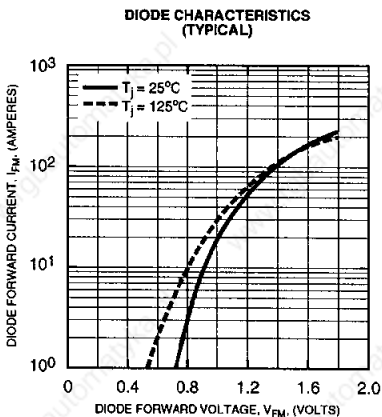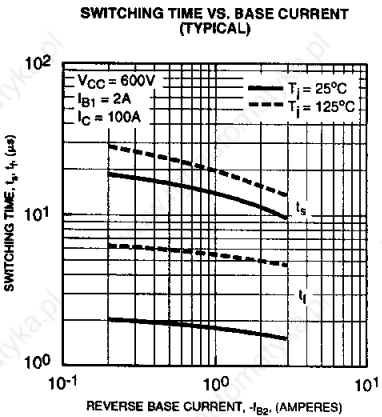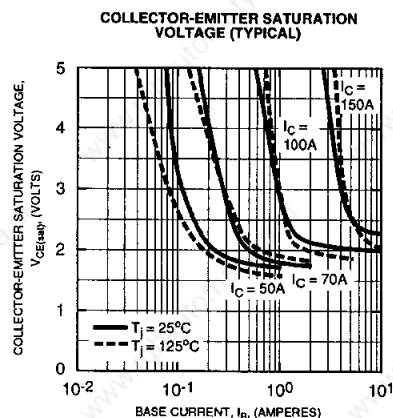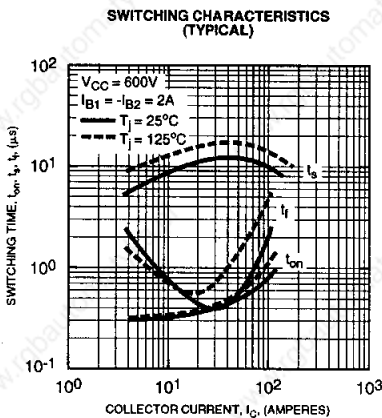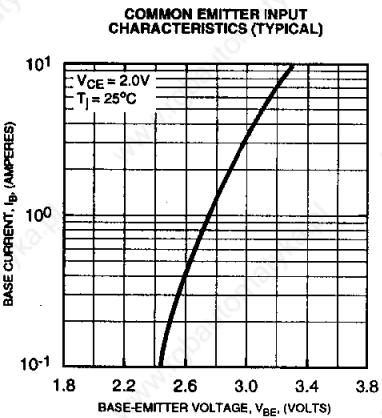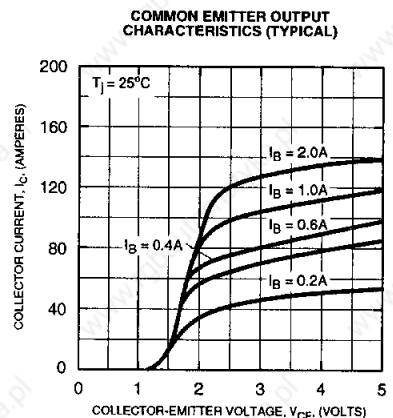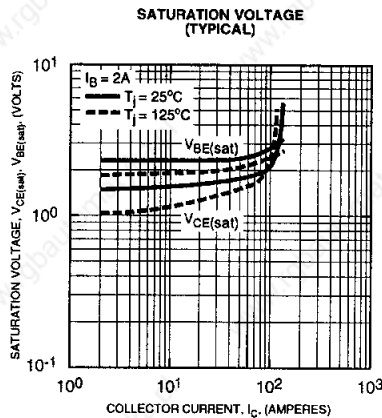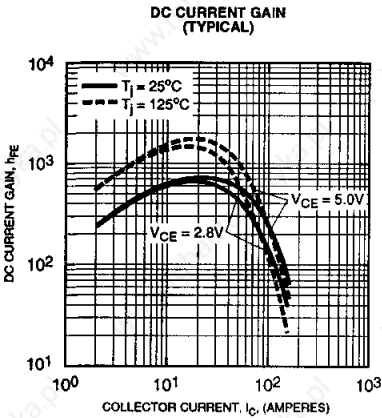

**KD421K10**  
**Dual Darlingtion Transistor Module**  
 100 Amperes/1000 Volts

