



DRS1/DRS4 Series

- 10 mm Single Channel and 54mm Four Channel DIN Rail Mount Sockets
- Input status LED for either 3 to 15, 20-28 or 15-32 VDC control
- Cage style screw terminals for easy connection
- Fits standard 35mm DIN rail





PRODUCT SELECTION

Control Voltage

Single Channel	DRS1
Four Channel	DRS4


MECHANICAL SPECIFICATIONS

Tolerances: ± 0.02 in / 0.5 mm
 All dimensions are in: inches [millimeters]

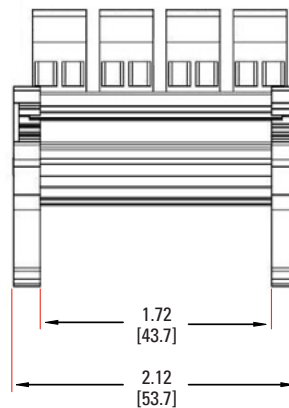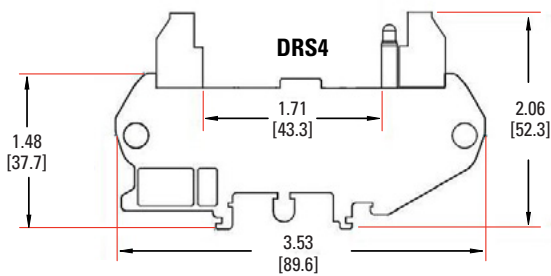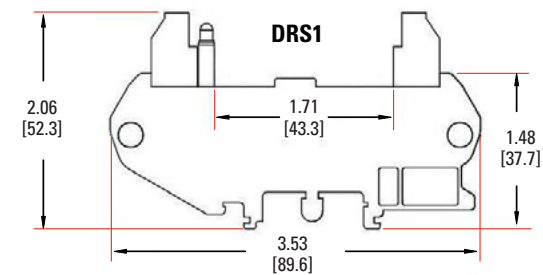

WIRING DIAGRAM

Wiring Diagram ^(A)

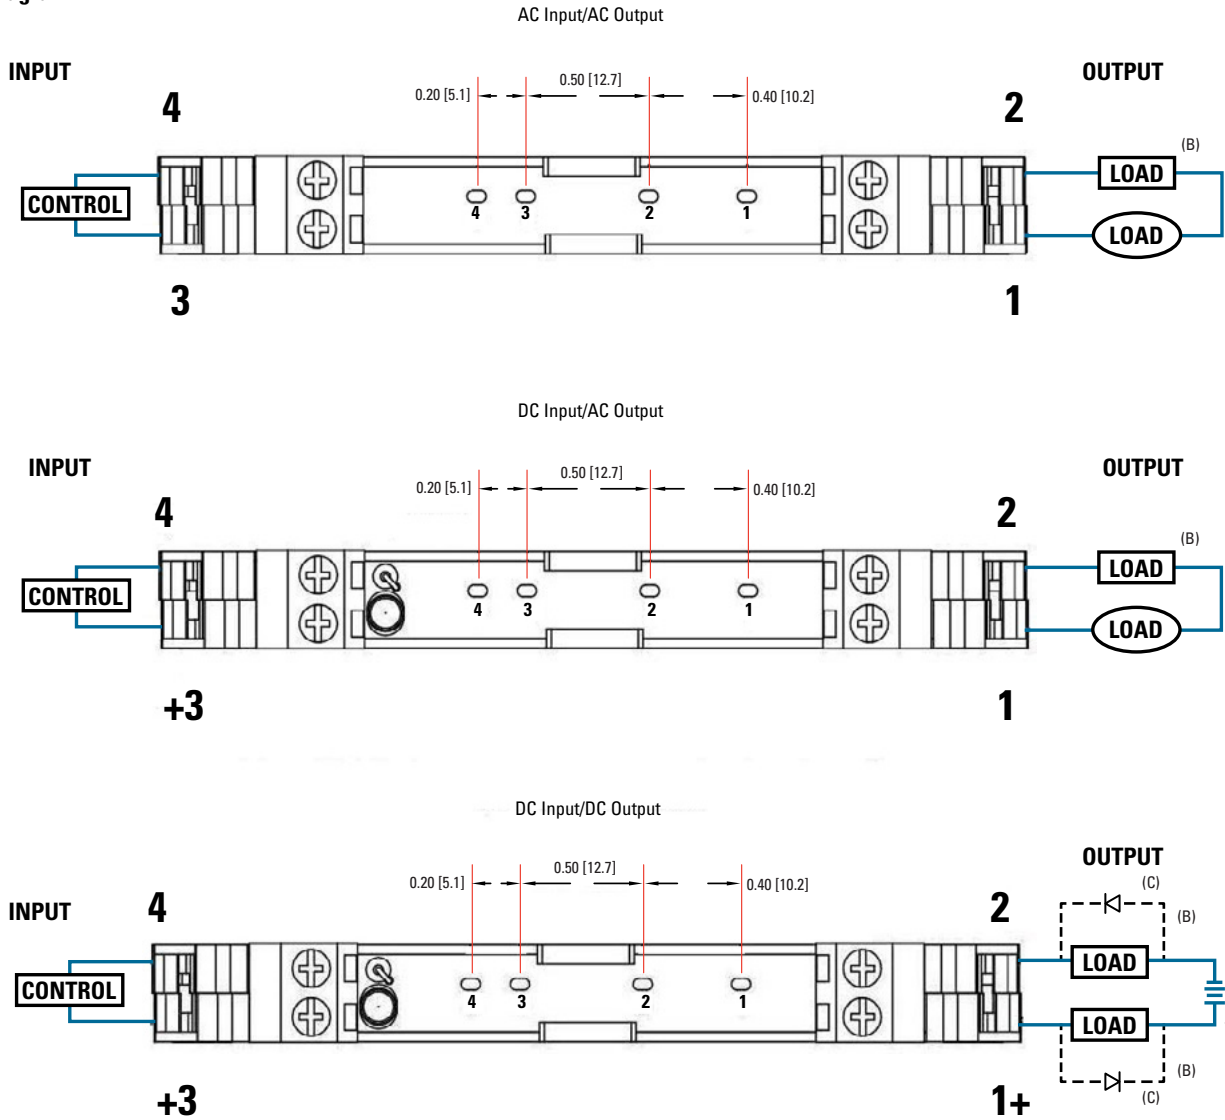

- (A) Wiring diagram is identical for each individual section whether it is single or four channel assembly.
- (B) Load can be placed on either side of "Power".
- (C) DC Inductive loads must be diode suppressed to prevent damage to SSR.

Note: Socket configuration must be coordinated with relay selection for installation.