

**Table 2. Class H fuse block catalog numbers**

| Box lug     | Terminal type          |                           |                | Volts | Fuse amp range | Poles |
|-------------|------------------------|---------------------------|----------------|-------|----------------|-------|
|             | #10-32 Phil-slot screw | Screw with quick-connect* | Pressure plate |       |                |       |
| HM25030-1CR | HM25030-1SR            | HM25030-1QR               | HM25030-1PR    | 250   | 1/2 to 30      | 1     |
| HM25030-2CR | HM25030-2SR            | HM25030-2QR               | HM25030-2PR    |       |                | 2     |
| HM25030-3CR | HM25030-3SR            | HM25030-3QR               | HM25030-3PR    |       |                | 3     |
| HM25060-1CR | —                      | —                         | —              | 250   | 31 to 60       | 1     |
| HM25060-2CR | —                      | —                         | —              |       |                | 2     |
| HM25060-3CR | —                      | —                         | —              |       |                | 3     |
| HM60030-1CR | HM60030-1SR            | —                         | HM60030-1PR    | 600   | 1/2 to 30      | 1     |
| HM60030-2CR | HM60030-2SR            | —                         | HM60030-2PR    |       |                | 2     |
| HM60030-3CR | HM60030-3SR            | —                         | HM60030-3PR    |       |                | 3     |
| HM60060-1CR | —                      | —                         | —              | 600   | 31 to 60       | 1     |
| HM60060-2CR | —                      | —                         | —              |       |                | 2     |
| HM60060-3CR | —                      | —                         | —              |       |                | 3     |

\* 3/16" Quick Connect terminal maximum ampacity dependent on female spade connector and wire ratings.

**Table 3. Class H block covers**

| Fuse block series | Volts | Amp range | Catalog numbers |                |
|-------------------|-------|-----------|-----------------|----------------|
|                   |       |           | Indicating      | Non-indicating |
| HM25030-#XX       | 250   | 1/2 to 30 | CVRI-RH-25030   | CVR-RH-25030   |
| HM25060-#XX       |       | 31 to 60  | CVRI-RH-25060   | CVR-RH-25060   |
| HM60030-#XX       | 600   | 1/2 to 30 | CVRI-RH-60030   | CVR-RH-60030   |
| HM60060-#XX       |       | 31 to 60  | CVRI-RH-60060   | CVR-RH-60060   |

# = number of poles  
XX = terminal type



**Table 4. Class R fuse block catalog numbers**

| Box lug     | Terminal type          |                          |                | Volts | Fuse amp range | Poles |
|-------------|------------------------|--------------------------|----------------|-------|----------------|-------|
|             | #10-32 Phil-slot screw | Screw with quick-connect | Pressure plate |       |                |       |
| RM25030-1CR | RM25030-1SR            | RM25030-1QR              | RM25030-1PR    | 250   | 1/2 to 30      | 1     |
| RM25030-2CR | RM25030-2SR            | RM25030-2QR              | RM25030-2PR    |       |                | 2     |
| RM25030-3CR | RM25030-3SR            | RM25030-3QR              | RM25030-3PR    |       |                | 3     |
| RM25060-1CR | —                      | —                        | —              | 250   | 31 to 60       | 1     |
| RM25060-2CR | —                      | —                        | —              |       |                | 2     |
| RM25060-3CR | —                      | —                        | —              |       |                | 3     |
| RM60030-1CR | RM60030-1SR            | —                        | RM60030-1PR    | 600   | 1/2 to 30      | 1     |
| RM60030-2CR | RM60030-2SR            | —                        | RM60030-2PR    |       |                | 2     |
| RM60030-3CR | RM60030-3SR            | —                        | RM60030-3PR    |       |                | 3     |
| RM60060-1CR | —                      | —                        | —              | 600   | 31 to 60       | 1     |
| RM60060-2CR | —                      | —                        | —              |       |                | 2     |
| RM60060-3CR | —                      | —                        | —              |       |                | 3     |

\* 3/16" Quick Connect terminal maximum ampacity dependent on female spade connector and wire ratings.

**Table 5. Class R block covers**


| Fuse block series | Volts | Amp range | Catalog numbers |                |
|-------------------|-------|-----------|-----------------|----------------|
|                   |       |           | Indicating      | Non-indicating |
| RM25030-#XX       | 250   | 1/2 to 30 | CVRI-RH-25030   | CVR-RH-25030   |
| RM25060-#XX       |       | 31 to 60  | CVRI-RH-25060   | CVR-RH-25060   |
| RM60030-#XX       | 600   | 1/2 to 30 | CVRI-RH-60030   | CVR-RH-60030   |
| RM60060-#XX       |       | 31 to 60  | CVRI-RH-60060   | CVR-RH-60060   |

# = number of poles  
XX = terminal type



**Dimensions - mm (in):**

**Class H(K) and R 250V - 30A block**

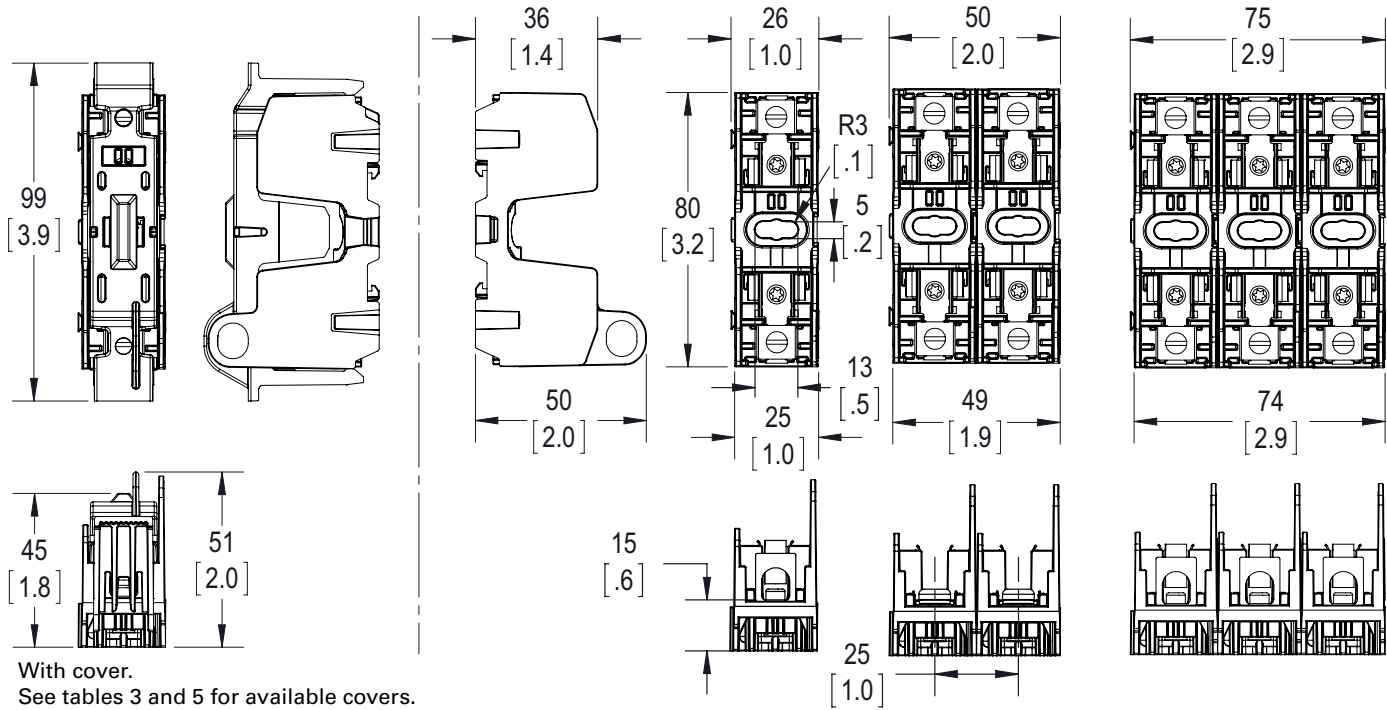

**Class H(K) and R 250V - 60A block**

