95.13.2

95.15.2



Approvals (according to type):

| PCB socket | 95.13.2 (blue) | 95.13.20 (black) | 95.15.2 (blue) | 95.15.20 (black) |
|---|---|---|---|---|
| For relay type | 41.31 | | 41.52, 41.61 | |
| **Accessories** | | | | |
| Metal retaining clip (supplied with socket - packaging code SNA) | 095.41.3 | | | |
| Plastic retaining clip | 095.42 | | | |
| **Technical data** | | | | |
| Rated values | 10 A - 250 V * | | | |
| Insulation | ≥ 6 kV (1.2/50 µs) between coil and contacts | | | |
| Protection category | IP 20 | | | |
| Ambient temperature °C | –40...+70 | | | |

* For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

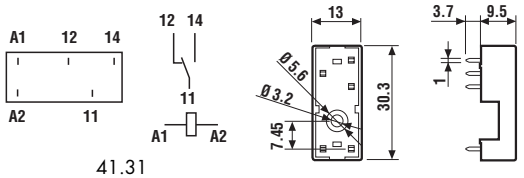

41.31

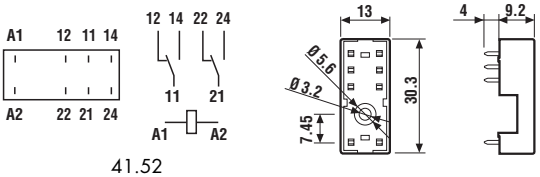

41.52



95.13.2
Copper side view



41.61



95.15.2
Copper side view

## Packaging codes

**How to code and identify retaining clip and packaging options for sockets.**
Code options according to the last three letters:

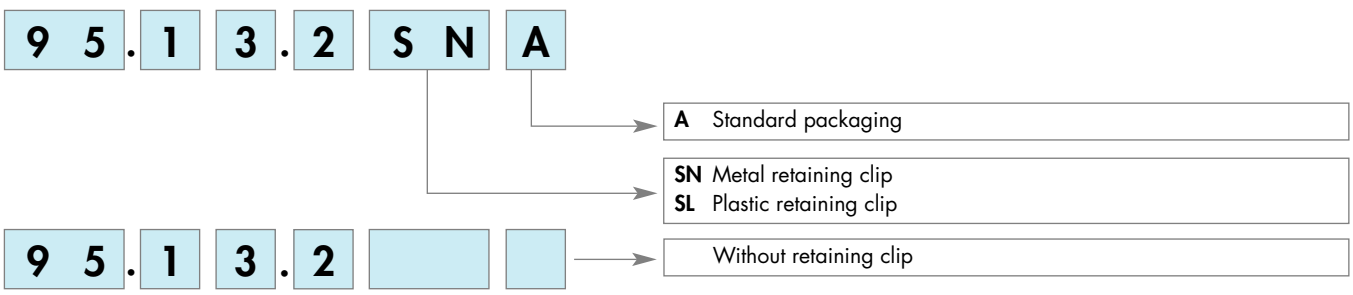

# 95 Series - Socket overview for 40 series relays

95.05

See page 27

| Module | Socket | Relay | Description | Mounting | Accessories |
|---|---|---|---|---|---|
| 99.02 | 95.03 | 40.31 | **Screw terminal (Box clamp) socket** | Panel or 35 mm rail (EN 50022) mount | - Coil indication and EMC suppression modules<br>- Jumper link<br>- Timer modules<br>- Plastic retaining and release clip |
| | 95.05 | 40.51<br>40.52<br>40.61 | Top terminals - Contacts<br>Bottom terminals - Coil | | |

95.85.3

See page 28

| Module | Socket | Relay | Description | Mounting | Accessories |
|---|---|---|---|---|---|
| 99.80 | 95.83.3 | 40.31 | **Screw terminal (Box clamp) socket** | Panel or 35 mm rail (EN 50022) mount | - Coil indication and EMC suppression modules<br>- Jumper link<br>- Plastic retaining and release clip |
| | 95.85.3 | 40.51<br>40.52<br>40.62 | 95.83.3 wiring:<br>Top terminals - Contacts<br>Bottom terminals - Coil | | |

95.95.3

See page 29

| Module | Socket | Relay | Description | Mounting | Accessories |
|---|---|---|---|---|---|
| 99.80 | 95.93.3 | 40.31 | **Screw terminal (Box clamp) socket** | Panel or 35 mm rail (EN 50022) mount | - Coil indication and EMC suppression modules<br>- Jumper link<br>- Plastic retaining and release clip |
| | 95.95.3 | 40.51<br>40.52<br>40.61 | Top terminals - Contacts<br>Bottom terminals - Coil | | |

95.55

See page 30

| Module | Socket | Relay | Description | Mounting | Accessories |
|---|---|---|---|---|---|
| 99.02 | 95.55 | 40.51<br>40.52<br>40.61 | **Screwless terminal socket**<br>For fast cable connections<br>Top terminals - Contacts<br>Bottom terminals - Coil | Panel or 35 mm rail (EN 50022) mount | - Coil indication and EMC suppression modules<br>- Timer modules<br>- Plastic retaining and release clip |
| | | | | | |


95.55.3

See page 31

| Module | Socket | Relay | Description | Mounting | Accessories |
|---|---|---|---|---|---|
| 99.80 | 95.55.3 | 40.51<br>40.52<br>40.61 | **Screwless terminal socket**<br>For fast cable connections<br>Top terminals - Contacts<br>Bottom terminals - Coil | Panel or 35 mm rail (EN 50022) mount | - Coil indication and EMC suppression modules<br>- Plastic retaining and release clip |
| | | | | | |

95.13.2

See page 32

| Module | Socket | Relay | Description | Mounting | Accessories |
|---|---|---|---|---|---|
| — | 95.13.2 | 40.31<br>40.41 | **PCB socket** | PCB mounting | - Metal retaining clip<br>- Plastic retaining clip |
| — | 95.15.2 | 40.51<br>40.52<br>40.61 | | | |

Top terminals



Bottom terminals