



R55F

SME312



D12E

D12



Dimensions (in mm)

Range (in mm)



**BR2.53S** Bifurcated rectangular, 40 mm

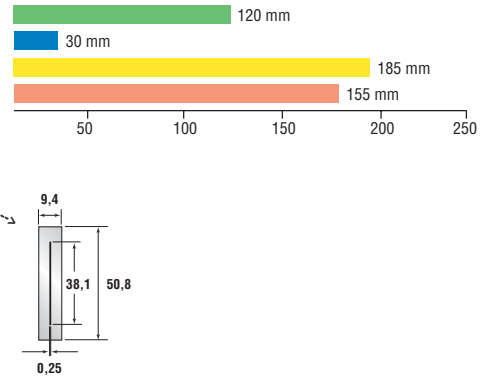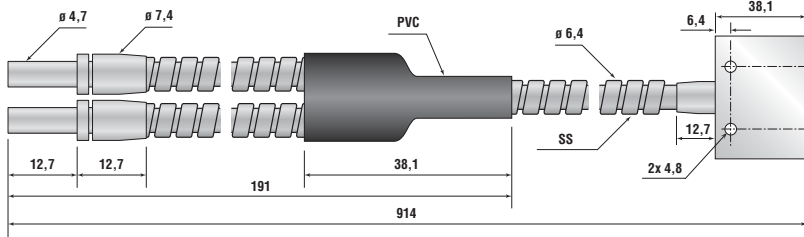



**BR23S** Bifurcated rectangular, 10 mm

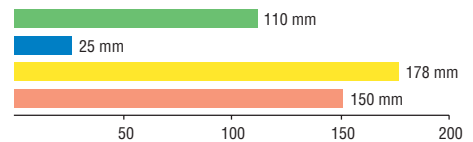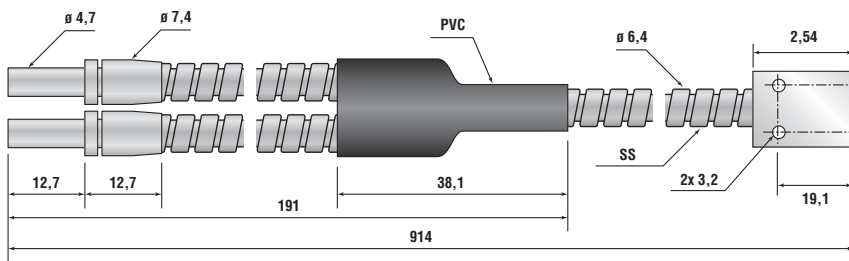

**BT13SM8** Bifurcated threaded, glass fibre, SS sheathing

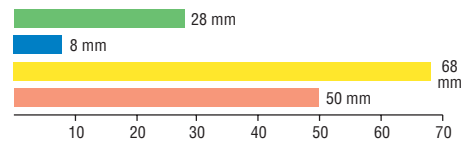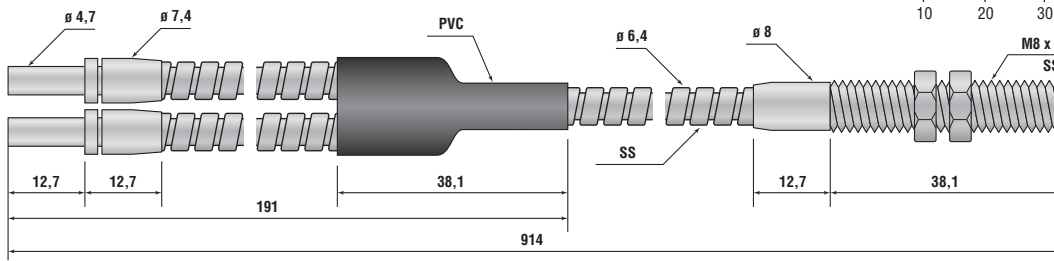

**BT23SM8** Bifurcated threaded, glass fibre, SS sheathing

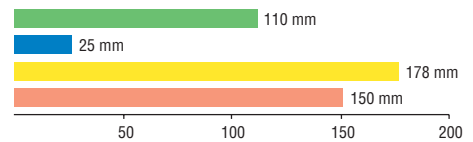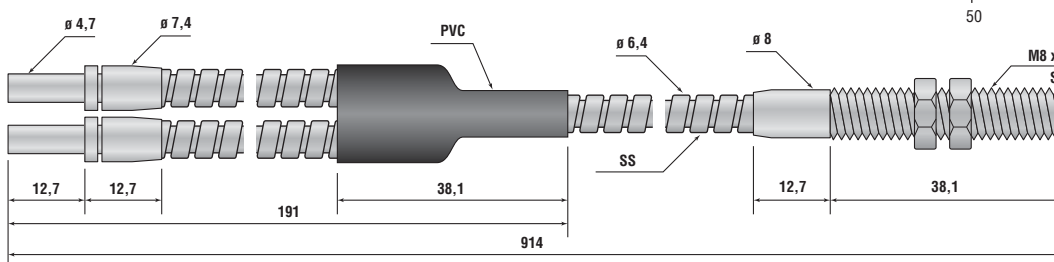



R55F

SME312



D12E

D12



Dimensions (in mm)

Range (in mm)



**BT23SM900** Bifurcated threaded, glass fibre, SS sheathing, special high-temperature 480° C end tip construction

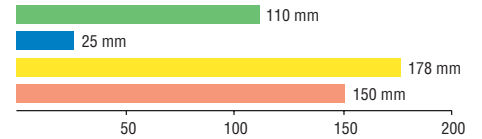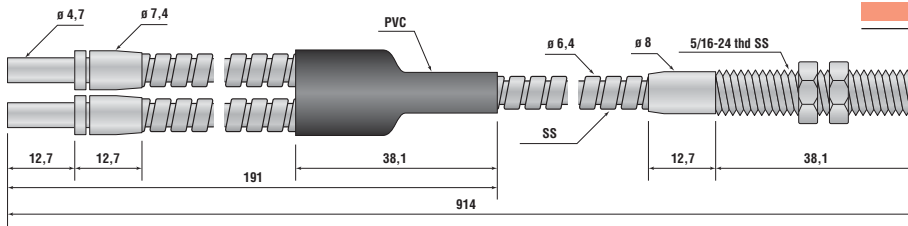



**IA23S** Individual angled

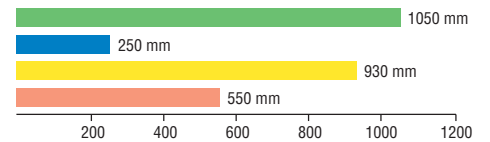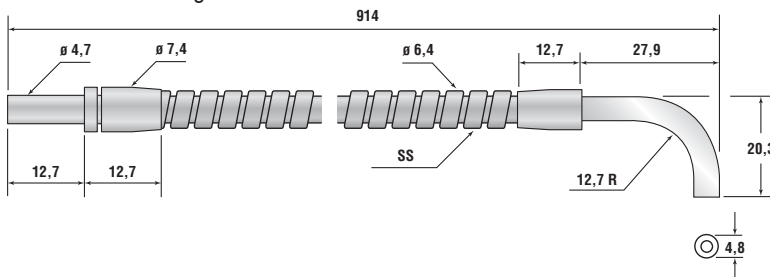

**IAR.753SMTA** Individual tight angle with rectangular bundle glass fibre, SS sheathing

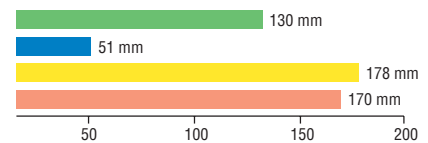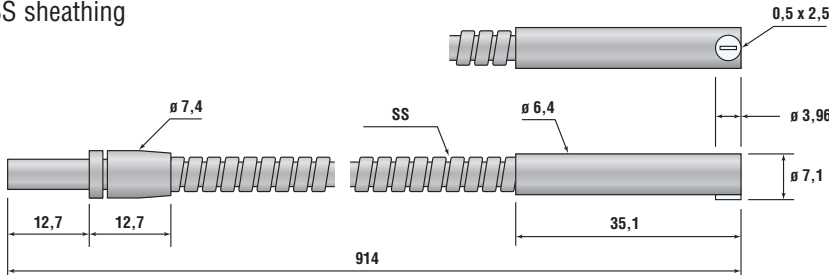

**IMM.442P** Individual miniature probe, glass fibre, SS sheathing

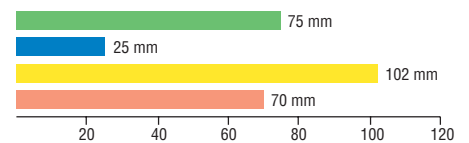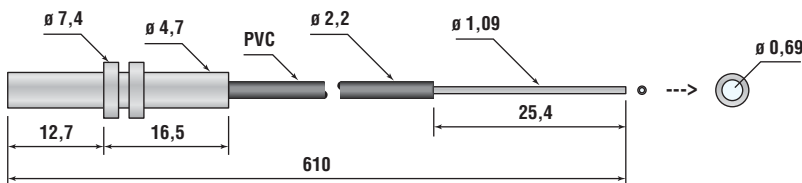

**IR2.53S** Individual rectangular, 40 mm

