

WORLD-BEAM® QS18LD Laser Diffuse Series Sensors



Datasheet



- Visible Class 1 laser for diffuse sensing
- Narrow effective beam provides small-object detection and precise position control
- Crosstalk rejection algorithm protects against optical disturbance from adjacent sensors
- Excellent optical performance throughout sensing range, even close up
- 10 to 30 V dc operation, with complementary (SPDT) NPN or PNP outputs, depending on model
- Bright LED operating status indicators are visible from 360°
- Compact, rugged sealed housing, protected circuitry
- Mounting versatility – popular 18 mm threaded barrel or side-mount
- Choose 2 m (6.5 ft) or 9 m (30 ft) cable or one of four QD options

Models	Sensing Range	Spot Size at Focus	Cable	Output
QS18VN6LD	650 nm Visible Red Class 1 Laser 300 mm (12 in)	Approximately 1 mm at 300 mm (0.039 in at 12 in)	4-wire, 2 m (6.5 ft) integral cable	NPN
QS18VP6LD				PNP

The standard 2 m (6.5 ft) cable models are listed. To order the 9 m (30 ft) cable models, add the suffix "W/30" to the model number (e.g., QS18VN6LD W/30). A model with a QD connector requires a mating cordset. To order the QD models:


- For 4-pin integral Euro-style QD, add suffix "Q8" (e.g., QS18VN6LDQ8).
- For 4-pin integral Pico-style QD, add suffix "Q7" (e.g., QS18VN6LDQ7).
- For 4-pin Euro-style 150 mm (6 inch) pigtail QD, add suffix "Q5" (e.g., QS18VN6LDQ5).
- For 4-pin Pico-style 150 mm (6 inch) pigtail QD, add suffix "Q" (e.g., QS18VN6LDQ).



WARNING: Not To Be Used for Personnel Protection

Never use this device as a sensing device for personnel protection. Doing so could lead to serious injury or death. This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition.

Wiring Diagrams

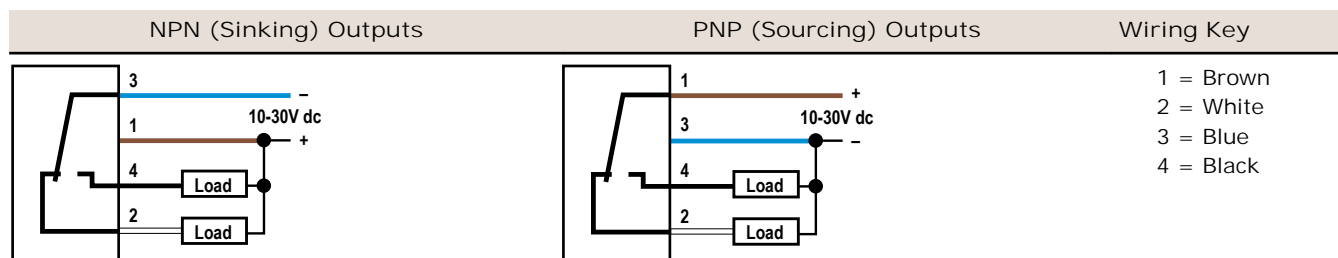

Cabled wiring diagrams are shown. Quick disconnect (QD) wiring diagrams are functionally identical.



Description of Laser Classes

Class 1 Lasers

Class 1 lasers are lasers that are safe under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

Reference IEC 60825-1:2001, Section 8.2.

Class 1 Laser Characteristics: See Specifications.



CAUTION: Do Not Disassemble for Repair

This device contains no user-serviceable components. Do not attempt to disassemble for repair. Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure. A defective unit must be returned to the manufacturer.



For Safe Laser Use (Class 1 or Class 2):

- Do not stare at the laser.
- Do not point the laser at a person's eye.
- Mount open laser beam paths either above or below eye level, where practical.
- Terminate the beam emitted by the laser product at the end of its useful path.

Specifications

Supply Voltage 10 to 30 V dc (10% maximum ripple) at less than 15 mA, exclusive of load	Repeatability 130 microseconds
Sensing Beam Visible red LED, 650 nm	Sensing Hysteresis 15% of range typical
Laser Characteristics Wavelength: 650 nm visible red Class 1 laser Pulse Width: 7 microseconds Rep Rate: 130 microseconds Average Output Power: 0.065 mW	Adjustments Single-turn sensitivity (Gain) adjustment potentiometer
Supply Protection Circuitry Protected against reverse polarity and transient voltages	Indicators 2 LED indicators on sensor top: Green solid: Power on Amber solid: Light sensed Amber flashing: Marginal excess gain (1 to 1.5x excess gain)
Output Configuration Solid-state complementary (SPDT): NPN or PNP (current sinking or sourcing), depending on model; Rating: 100 mA maximum each output at 25 °C Off-state leakage current: NPN: less than 200 µA @ 30 V dc (See Application Note 1) PNP: less than 10 µA @ 30 V dc ON-state saturation voltage: NPN: less than 1.6 V @ 100 mA PNP: less than 3.0 V @ 100 mA	Construction ABS housing, acrylic lens cover, 3 mm mounting hardware included
Output Protection Circuitry Protected against false pulse on power-up and continuous overload or short circuit of outputs	Environmental Ratings IEC IP67; NEMA 6; UL Type 1
Output Response 700 microseconds ON/OFF NOTE: 200 millisecond delay on power-up; outputs do not conduct during this time	Connections 2 m (6.5 ft) 4-wire PVC cable, 9 m (30 ft) 4-wire PVC cable, 4-pin Pico-style or Euro-style QD, 4-pin Pico-style or Euro-style 150 mm (6 in) pigtail QD, depending on model
	Operating Conditions Temperature: -10 °C to 50 °C (14 °F to 122 °F) Relative Humidity: 90% @ 50 °C (non-condensing)
	Laser Classification Class 1 laser product; Complies with IEC 60825-1:2001 and 21 CFR 1040.10, except for deviations pursuant to Laser Notice 50, dated 7-26-01
	Application Notes NPN off-state leakage current is < 200 µA for load resistances > 3 kΩ or optically isolated loads. For load current of 100 mA, leakage is < 1% of load current.
	Certifications

