

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


7W 308

Dimensions, LxW:	3.0 x 0.8 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 6.7$ at 0°C $\Delta T_a = 46$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.08$ $T_{0.63} = 0.10$ $T_{0.9} = 0.25$ $T_{0.5} = 1.2$ $T_{0.63} = 1.5$ $T_{0.9} = 3.5$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3	
Note:	Pure platinum wire, 0.15 mm diameter	



6W 202

Dimensions, LxW:	2.0 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000/2000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 3.1$ at 0°C $\Delta T_a = 31$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.11$ $T_{0.63} = 0.16$ $T_{0.9} = 0.38$ $T_{0.5} = 3.6$ $T_{0.63} = 4.9$ $T_{0.9} = 10.2$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3 2000 Ω : 0.2	

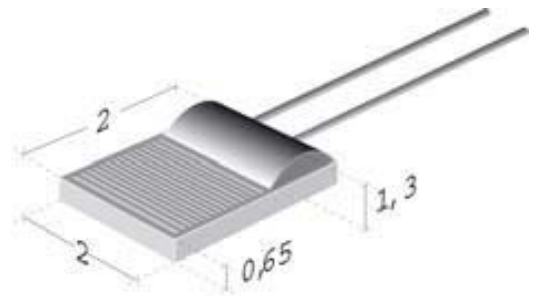


INNOVATIVE SENSOR TECHNOLOGY

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


6W 216

Dimensions, LxW:	2.5 x 1.6 mm	
Nominal Resistance at 0°C (ohm):	100/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 2.8$ at 0°C $\Delta T_a = 28$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.12$ $T_{0.63} = 0.18$ $T_{0.9} = 0.42$ $T_{0.5} = 4$ $T_{0.63} = 5.4$ $T_{0.9} = 11$
Measuring Current (mA):	100 Ω : 1 1000 Ω : 0.3	

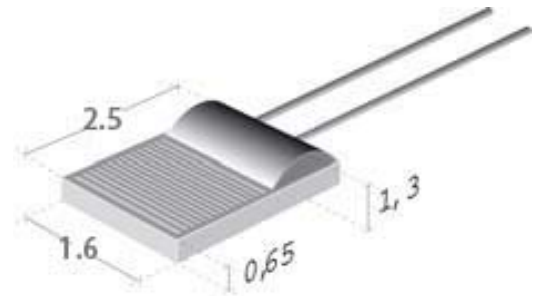

6W 232

Dimensions, LxW:	2.3 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000/2000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 2.5$ at 0°C $\Delta T_a = 25$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.15$ $T_{0.63} = 0.2$ $T_{0.9} = 0.55$ $T_{0.5} = 4.5$ $T_{0.63} = 6$ $T_{0.9} = 12$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3 2000 Ω : 0.2	

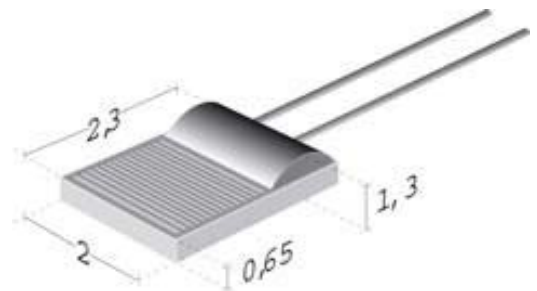

INNOVATIVE SENSOR TECHNOLOGY