

Relay Module - RIF-1-RPT-LDP-24DC/1X21MS - 2905289

Technical data

Connection data output side

Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
	0.14 mm ² ... 1.5 mm ² (Ferrule with plastic sleeve)
	0.14 mm ² ... 1 mm ² (Ferrule with plastic sleeve, two conductors on double terminal block)
Conductor cross section AWG	26 ... 16 (solid)
	26 ... 16 (stranded)

General

Test voltage relay winding/relay contact	4 kV _{rms} (50 Hz, 1 min.)
Operating mode	100% operating factor
Degree of protection	IP20 (Relay base)
	RT II (Relay)
Mechanical service life	Approx. 5 x 10 ⁶ cycles
Mounting position	any
Assembly instructions	In rows with zero spacing

Standards and Regulations

Standards/regulations	DIN EN 50178
Rated insulation voltage	250 V AC
Rated surge voltage	6 kV
Insulation	safe isolation
Degree of pollution	2
Overvoltage category	III
Flammability rating according to UL 94	V2


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Relay Module - RIF-1-RPT-LDP-24DC/1X21MS - 2905289

Circuit diagram



DC coils


Diagram

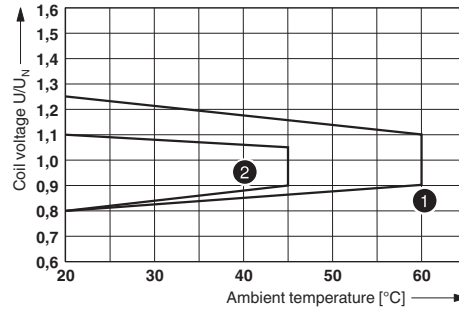

- ① DC coils
- ② AC coils


Operating voltage range

Diagram

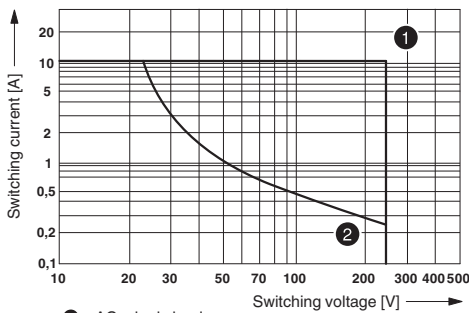

- ① = AC, ohmic load
- ② = DC, ohmic load


Diagram

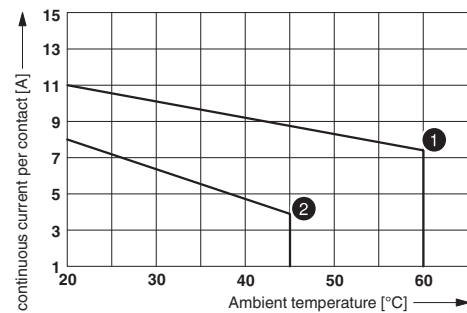

- ① DC coil
- ② AC coil

Interrupting rating


Diagram

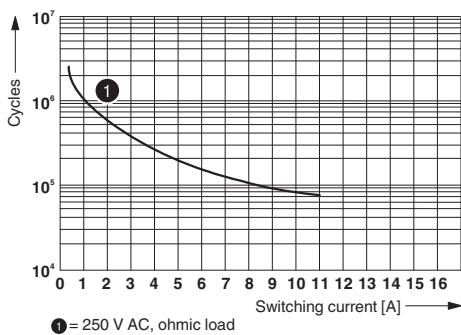

- ① = 250 V AC, ohmic load

Contact derating

Diagram

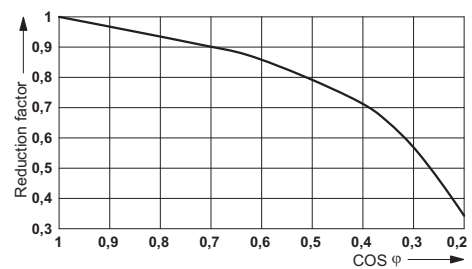

Electrical service life

Service life reduction factor