

## Ratings

### Coil

| Item           | Rated current (mA) | Coil resistance (Ω) | Coil inductance (H) |              | Must operate voltage          | Must release voltage | Max. permissible voltage | Power consumption (VA-W) |
|----------------|--------------------|---------------------|---------------------|--------------|-------------------------------|----------------------|--------------------------|--------------------------|
| Rated voltage  |                    |                     | Armature ON         | Armature OFF | On the basis of rated voltage |                      |                          |                          |
| 12 VAC         | 142                | 17.0 to 20.4        |                     |              | 75% max.                      | 15% min.             | 110%                     | Approx. 1.7 to 2.5       |
| 24 VAC         | 71                 |                     |                     |              |                               |                      |                          |                          |
| 50 VAC         | 34                 |                     |                     |              |                               |                      |                          |                          |
| 100 to 120 VAC | 17.0 to 20.4       |                     |                     |              | 75 V max.                     | 18 V min.            | 132 V                    |                          |
| 200 to 240 VAC | 8.5 to 10.2        |                     |                     |              | 150 V max.                    | 36 V min.            | 264 V                    |                          |
| 6 VDC          | 317                | 18.9                | 0.09                | 0.21         | 75% max.                      | 15% min.             | 110%                     | Approx. 1.9              |
| 12 VDC         | 158                | 75                  | 0.37                | 0.88         |                               |                      |                          |                          |
| 24 VDC         | 79                 | 303                 | 1.42                | 3.54         |                               |                      |                          |                          |
| 48 VDC         | 40                 | 1220                | 6.1                 | 15.3         |                               |                      |                          |                          |
| 100 VDC        | 19                 | 5260                | 21.3                | 60.0         |                               |                      |                          |                          |

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with tolerances of +15%/-20% for AC rated current and ±15% for DC coil resistance.

2. The inductances shown above are reference values.

3. Performance characteristic data are measured at a coil temperature of 23°C.

4. The maximum allowable coil voltage refers to the maximum value in a varying range of operating power voltage, measured at ambient temperature 23°C.

5. The "to" (for example "100 to 120") represents the range of rated voltages.

### Contacts

| Item                      | Contact Form<br><br>load | G7L-1A-T□<br>G7L-1A-B□ |                                | G7L-2A-T□<br>G7L-2A-B□ |                                   | G7L-1A-P<br>G7L-2A-P |                                   |
|---------------------------|--------------------------|------------------------|--------------------------------|------------------------|-----------------------------------|----------------------|-----------------------------------|
|                           |                          | Resistive<br>load      | Inductive load<br>(cosφ = 0.4) | Resistive<br>load      | Inductive<br>load<br>(cosφ = 0.4) | Resistive<br>load    | Inductive<br>load<br>(cosφ = 0.4) |
| Contact type              | Double break             |                        |                                |                        |                                   |                      |                                   |
| Contact material          | Ag alloy                 |                        |                                |                        |                                   |                      |                                   |
| Rated load                | 30 A at 220 VAC          | 25 A at 220 VAC        | 25 A at 220 VAC                |                        | 20 A at 220 VAC                   |                      |                                   |
| Rated carry current       | 30 A                     |                        | 25 A                           |                        | 20 A                              |                      |                                   |
| Max. switching<br>voltage | 250 VAC                  |                        |                                |                        |                                   |                      |                                   |
| Max. switching<br>current | 30 A                     |                        | 25 A                           |                        | 20 A                              |                      |                                   |

Note. When using B-series (screw) products, since the screw diameter of the contact terminal is M4, be careful that the contact current should be 20 A or less according to JET standard (electrical appliance and material control law of Japan).

## Characteristics

|                                             |                                                        |                                                                                                                                    |
|---------------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Contact resistance *1                       |                                                        | 50 mΩ max.                                                                                                                         |
| Operate time *2                             |                                                        | 30 ms max.                                                                                                                         |
| Release time *3                             |                                                        | 30 ms max.                                                                                                                         |
| Max. operating frequency                    | Mechanical                                             | 1,800 operations/hr                                                                                                                |
|                                             | Rated load                                             | 1,800 operations/hr                                                                                                                |
| Insulation resistance *3                    |                                                        | 1,000 MΩ min                                                                                                                       |
| Dielectric strength                         | Between coil and contacts                              | 4,000 VAC min., 50/60 Hz for 1 min                                                                                                 |
|                                             | Between contacts of same polarity                      | 2,000 VAC, 50/60 Hz for 1 min                                                                                                      |
|                                             | Between contacts of different polarity (DPST-NO model) |                                                                                                                                    |
| Impulse withstand voltage                   |                                                        | 10,000 V between coil and contact *4                                                                                               |
| Vibration resistance                        | Destruction                                            | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)                                                              |
|                                             | Malfunction                                            | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)                                                              |
| Shock resistance                            | Destruction                                            | 1,000 m/s <sup>2</sup>                                                                                                             |
|                                             | Malfunction                                            | 100 m/s <sup>2</sup>                                                                                                               |
| Endurance                                   | Mechanical                                             | 1,000,000 operations min. (at 1,800 operations/hr)                                                                                 |
|                                             | Electrical *5                                          | 100,000 operations min. (at 1,800 operations/hr under rated load)                                                                  |
| Failure rate (P level) (reference value *6) |                                                        | 100 mA at 5 VDC                                                                                                                    |
| Weight                                      |                                                        | Approx. 90 g:<br>Quick-connect terminal models<br>Approx. 100 g:<br>PCB terminal models<br>Approx. 120 g:<br>Screw terminal models |

Note. The values given above are initial values.

\*1. Measurement conditions: 5 VDC, 1 A, voltage drop method.

\*2. Measurement conditions: Rated operating voltage applied, not including contact bounce.

\*3. Measurement conditions: The insulation resistance was measured with a 500-VDC megohmmeter at the same locations as the dielectric strength was measured.

\*4. JEC-212 (1981) Standard Impulse Wave Type (1.2x50μs).


\*5. Ambient temperature: 23°C

\*6. This value was measured at a switching frequency of 60 operations/min.


|                               |                                               |
|-------------------------------|-----------------------------------------------|
| Ambient operating temperature | -25°C to 60°C (with no icing or condensation) |
| Ambient operating humidity    | 5% to 85%                                     |

## Engineering Data


**G7L-1A-T (TJ) (TUB) (TUBJ)  
G7L-1A-B (BJ) (BUB) (BUBJ)  
Maximum Switching Power**




**G7L-2A-T (TJ) (TUB) (TUBJ)  
G7L-2A-B (BJ) (BUB) (BUBJ)  
Maximum Switching Power**




**G7L-1A-P  
G7L-2A-P  
Maximum Switching Power**




**Ambient Temperature vs. Operate and Release Voltage  
G7L-1A VAC (60 Hz)**




### Endurance




### Endurance




### Endurance




### G7L-1A VDC




## Ambient Temperature vs. Coil Temperature Rise G7L-1A 120 VAC (50 Hz)




## G7L-1A VDC




## Shock Malfunction G7L-2A-T (TUB) 100 to 120 VAC

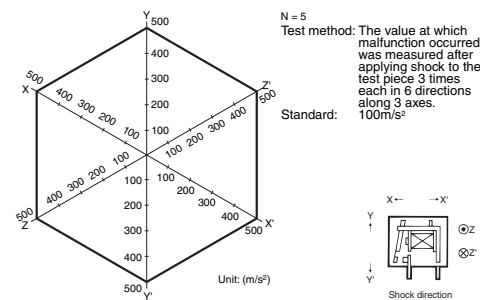


## Momentary Voltage Drop Test G7L-2A-T (TUB) 100 to 120 VAC Test Circuit



## Wave resulted from test




## Voltage distribution of wave e which chattering does not occur.




## Characteristic variation resulted from different mounting directions G7L-2A-T (TUB) 100 to 120 VAC


### Operate time




### Release time



### Operate voltage




### Release voltage




(Note.)The mounting direction A' deteriorates switching performance.


## Actual Load Endurance Test G7L-2A 100 to 200 VAC Operate and Release voltages N = 5




## Contact resistance



## Operate and Release voltages N = 5




## Contact resistance



## Load conditions


- 1 φ 220 VAC



- Applied coil voltage: 100% of rated voltage

## Load conditions

- 1 φ 220 VAC



- Applied coil voltage: 100% of rated voltage