

## Specifications

### Ratings

#### Coil Ratings

| Rated voltage | Rated current |         | Coil resistance | Must operate voltage | Must release voltage      | Max. voltage          | Power consumption                                  |
|---------------|---------------|---------|-----------------|----------------------|---------------------------|-----------------------|----------------------------------------------------|
|               | 50 Hz         | 60 Hz   |                 |                      |                           |                       |                                                    |
| AC            | 6 V           | 443 mA  | 385 mA          | 3.1 $\Omega$         | 80% max. of rated voltage | 110% of rated voltage | Approx. 2.3 VA at 60 Hz<br>Approx. 2.7 VA at 50 Hz |
|               | 12 V          | 221 mA  | 193 mA          | 13.7 $\Omega$        |                           |                       |                                                    |
|               | 24 V          | 110 mA  | 96.3 mA         | 48.4 $\Omega$        |                           |                       |                                                    |
|               | 100 V         | 26.6 mA | 23.1 mA         | 760 $\Omega$         |                           |                       |                                                    |
|               | 110 V         | 24.2 mA | 21.0 mA         | 932 $\Omega$         |                           |                       |                                                    |
|               | 200 V         | 13.3 mA | 11.6 mA         | 3,160 $\Omega$       |                           |                       |                                                    |
|               | 220 V         | 12.1 mA | 10.5 mA         | 3,550 $\Omega$       |                           |                       |                                                    |
|               | 230 V         | 10.0 mA | 11.5 mA         | 4,250 $\Omega$       |                           |                       |                                                    |
|               | 240 V         | 11.0 mA | 9.6 mA          | 4,480 $\Omega$       |                           |                       |                                                    |
| DC            | 6 V           | 224 mA  |                 | 26.7 $\Omega$        | 15% min. of rated voltage | Approx. 1.4 W         |                                                    |
|               | 12 V          | 112 mA  |                 | 107 $\Omega$         |                           |                       |                                                    |
|               | 24 V          | 55.8 mA |                 | 430 $\Omega$         |                           |                       |                                                    |
|               | 48 V          | 28.1 mA |                 | 1,710 $\Omega$       |                           |                       |                                                    |
|               | 100 V         | 13.5 mA |                 | 7,390 $\Omega$       |                           |                       |                                                    |
|               | 110 V         | 12.3 mA |                 | 8,960 $\Omega$       |                           |                       |                                                    |
|               | 125 V         | 10.8 mA |                 | 11,576 $\Omega$      |                           |                       |                                                    |

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with tolerances of +15%/–20% for AC rated current and  $\pm$ 15% for DC coil resistance.
  2. Performance characteristic data are measured at a coil temperature of 23°C.
  3. The maximum voltage is one that is applicable instantaneously to the Relay coil at 23°C and not continuously.
  4. For DC-operated Relays with the LED indicator built-in, add an LED current of approx. 5 mA to the rated current.

#### Contact Ratings


| Load                   | Resistive load<br>( $\cos\phi = 1$ ) | Inductive load<br>( $\cos\phi = 0.4$ ) |
|------------------------|--------------------------------------|----------------------------------------|
| Contact mechanism      | Single                               |                                        |
| Contact material       | AgSnIn                               |                                        |
| Rated load             | NO                                   | 7 A, 250 VAC                           |
|                        | NC                                   |                                        |
| Rated carry current    | 10 A                                 |                                        |
| Max. switching voltage | 250 VAC, 250 VDC                     |                                        |
| Max. switching current | 10 A                                 |                                        |
| Max. switching power   | NO                                   | 2,500 VA/300 W                         |
|                        | NC                                   | 1,250 VA/150 W                         |

## Characteristics


|                                        |                                                                                                                                                                                                                                                                               |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact resistance                     | 100 mΩ max.                                                                                                                                                                                                                                                                   |
| Operate time                           | AC: 20 ms max.<br>DC: 30 ms max.                                                                                                                                                                                                                                              |
| Release time                           | 20 ms max. (40 ms max. for built-in Diode Relays)                                                                                                                                                                                                                             |
| Max. operating frequency               | Mechanical: 18,000 operations/h<br>Electrical: 1,800 operations/h (under rated load)                                                                                                                                                                                          |
| Insulation resistance                  | 100 MΩ min. (at 500 VDC)                                                                                                                                                                                                                                                      |
| Dielectric strength                    | 2,500 VAC 50/60 Hz for 1 min between coil and contacts<br>1,000 VAC 50/60 Hz for 1 min between contacts of same polarity and terminals of the same polarity<br>2,500 VAC 50/60 Hz for 1 min between current-carrying parts, non-current-carrying parts, and opposite polarity |
| Insulation method                      | Basic insulation                                                                                                                                                                                                                                                              |
| Impulse withstand voltage              | 4.5 kV between coil and contacts (with 1.2 × 50 μs impulse wave)<br>3.0 kV between contacts of different polarity (with 1.2 × 50 μs impulse wave)                                                                                                                             |
| Pollution degree                       | 3                                                                                                                                                                                                                                                                             |
| Rated insulation voltage               | 250 V                                                                                                                                                                                                                                                                         |
| Vibration resistance                   | Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)<br>Malfunction: 10 to 55 to 10 Hz, 0.5-mm single amplitude (1.0-mm double amplitude)                                                                                                       |
| Shock resistance                       | Destruction: 1,000 m/s <sup>2</sup> (approx. 100 G)<br>Malfunction: 100 m/s <sup>2</sup> (approx. 10 G)                                                                                                                                                                       |
| Endurance                              | Mechanical: 5,000,000 operations min. (at 18,000 operations/h under rated load)<br>Electrical: 100,000 operations h. (at 1,800 operations/h under rated load)                                                                                                                 |
| Failure rate P level (reference value) | 10 mA at 1 VDC                                                                                                                                                                                                                                                                |
| Ambient temperature                    | Operating: -40 to 60°C (with no icing or condensation)                                                                                                                                                                                                                        |
| Ambient humidity                       | Operating: 5% to 85%                                                                                                                                                                                                                                                          |
| Weight                                 | Approx. 90 g                                                                                                                                                                                                                                                                  |

**Note:** 1. The values given above are initial values.  
2. P level:  $\lambda_{60} = 0.1 \times 10^{-6}$ /operation  
3. Ambient temperature of models with LED indicator is -25 to 60°C.

## Approved Standards

UL508 (File No. E41515) 

| Coil ratings                 | Contact ratings                                                                                                          | Operations |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------|------------|
| 6 to 110 VDC<br>6 to 240 VAC | N.O. contact<br>10 A, 250 V AC 50/60 Hz (Resistive)<br>10 A, 30 V DC (Resistive)<br>7 A, 250 V AC 50/60 Hz (General Use) | 100,000    |
|                              | N.C. contact<br>10 A, 250 V AC 50/60 Hz (Resistive)<br>10 A, 30 V DC (Resistive)<br>7 A, 250 V AC 50/60 Hz (General Use) | 100,000    |

CSA Standard: CSA C22.2 No. 14 (File No. LR35535) 

| Coil ratings                 | Number of Poles | Contact ratings                                                                                                                  | Operations |
|------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------|------------|
| 6 to 125 VDC<br>6 to 240 VAC | 2               | 10 A, 250 V AC (Resistive)<br>10 A, 30 V DC (Resistive)<br>7 A, 250 V AC (General Use)                                           | 100,000    |
|                              | 3               | 10 A, 250 V AC (Resistive) Same Polarity<br>10 A, 30 V DC (Resistive) Same Polarity<br>7 A, 250 V AC (General Use) Same Polarity | 100,000    |

IEC Standard/TÜV Certification: IEC61810-1 (Certification No. R50104853) 


| Coil ratings                                                          | Contact ratings                                                                                                          | Operations |
|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|------------|
| 6, 12, 24, 48, 100, 110 VDC<br>6, 12, 24, 100, 110, 200, 220, 240 VAC | N.O. contact<br>10 A, 250 V AC 50/60 Hz (Resistive)<br>10 A, 30 V DC (Resistive)<br>7 A, 250 V AC 50/60 Hz (General Use) | 100,000    |
|                                                                       | N.C. contact<br>5 A, 250 V AC 50/60 Hz (Resistive)<br>5 A, 30 V DC (Resistive)<br>7 A, 250 V AC 50/60 Hz (General Use)   | 100,000    |

**Note:** When Relays are mounted on the PF083A-E or PF113A-E, the maximum carrying current is 9 A.


## Engineering Data

### Reference Data

#### Maximum Switching Power

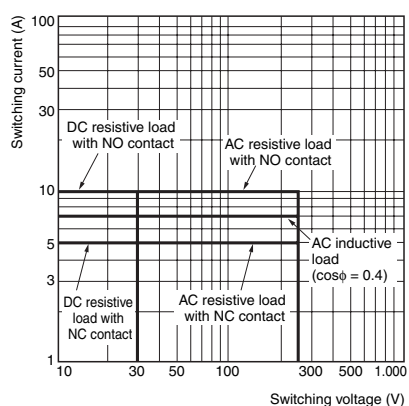

#### Rated Carry Current vs. Ambient Rated Temperature

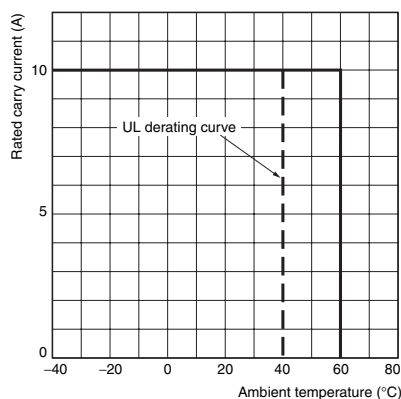

**Note:** The lower limit of the ambient operating temperature for models with built-in operation indicators is -25°C.