



Engineering Data

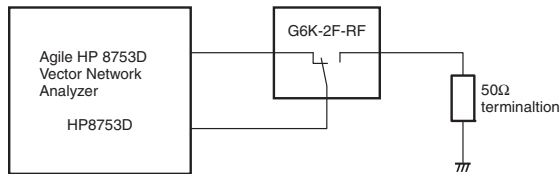


High-frequency Characteristics (Isolation) *1, *2

G6K-2F-RF

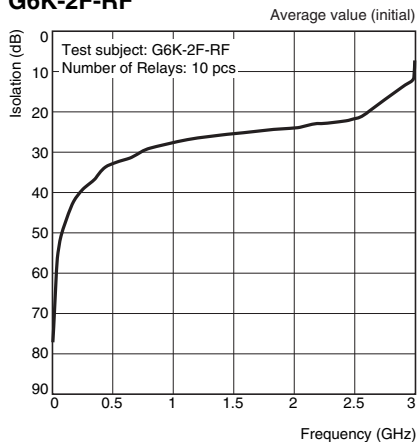


High-frequency Characteristics (Insertion Loss) *1, *2

G6K-2F-RF

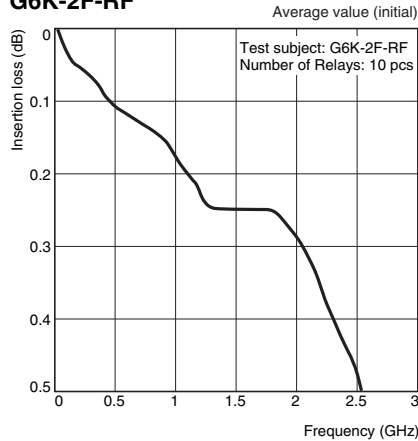


High-frequency Characteristics (Return Loss, V.SWR) *1, *2


G6K-2F-RF

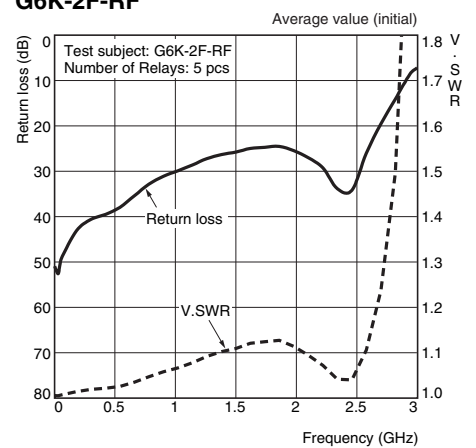


G6K-2F-RF-S

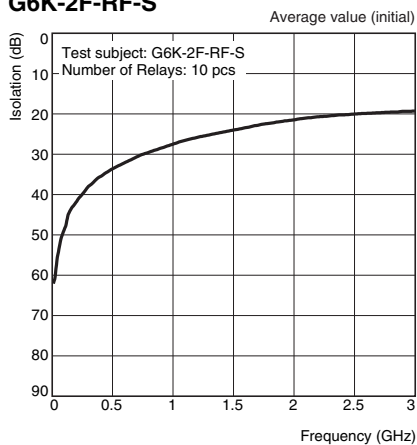


G6K-2F-RF-S

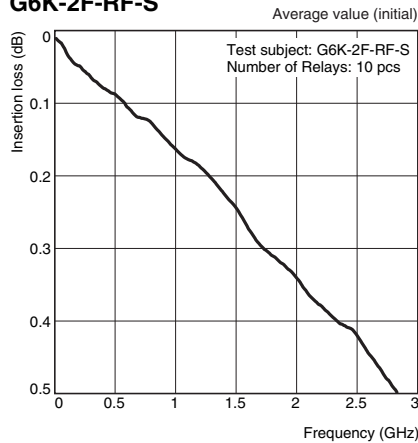


G6K-2F-RF-S

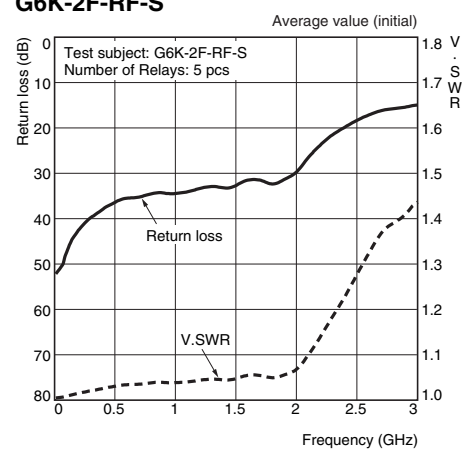


G6K-2F-RF-T

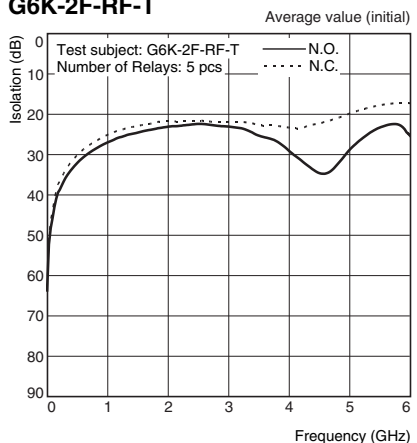

G6K-2F-RF-T

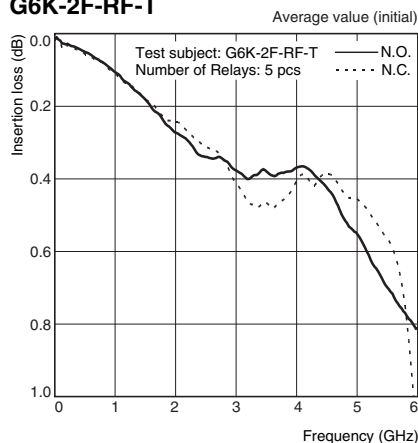


G6K-2F-RF-T

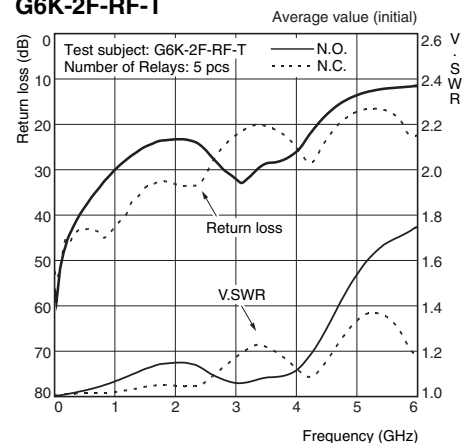


G6K(U)-2F(P)-RF(-S, -T)

Surface-mounting High-frequency Relay


G6K-2P-RF

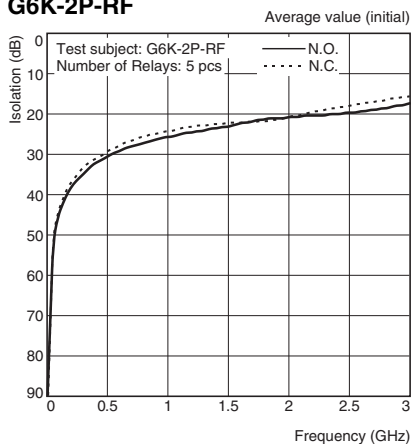

G6K-2P-RF

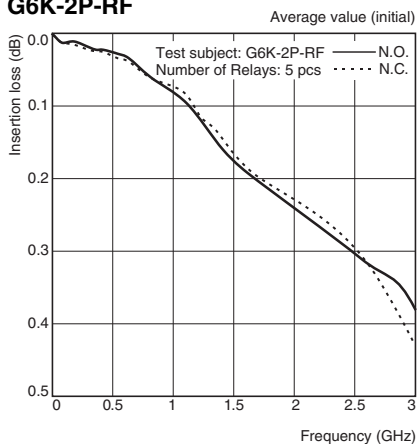

G6K-2P-RF

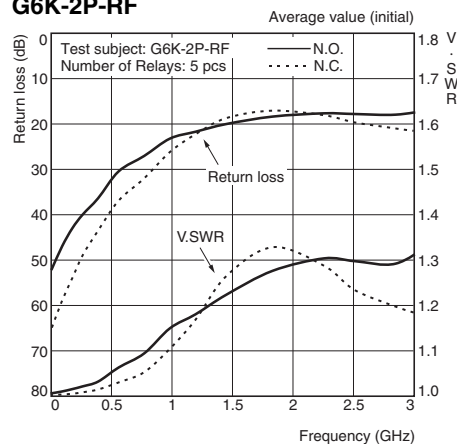

Note. Refer to the G6K specifications for basic specifications not shown above.

*1. Ambient temperature condition: 23°C

*2. The high-frequency characteristics depend on the mounting board.

Be sure to check operation including durability in actual equipment before use.




Dimensions

(Unit: mm)

Standard Specifications


G6K-2F-RF

G6KU-2F-RF




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm




Terminal Arrangement/ Internal Connections (Top View)

G6K-2F-RF



G6KU-2F-RF



Note 1. Each value has a tolerance of ± 0.3 mm.





Note 2. The coplanarity of the terminals is 0.15 mm max.

Note: Check carefully the coil polarity of the Relay.

Board space-saving model


G6K-2F-RF-S

G6KU-2F-RF-S




Mounting Dimensions (Top View)

Tolerance: ± 0.1 mm




Terminal Arrangement/ Internal Connections (Top View)

G6K-2F-RF-S



G6KU-2F-RF-S



Note 1. Each value has a tolerance of ± 0.3 mm.

Note 2. The coplanarity of the terminals is 0.15 mm max.

Note: Check carefully the coil polarity of the Relay.