


- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS/SAFETY COMPONENTS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASURE-MENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS
- Selection Guide
- Amplifier Built-in
- Power Supply Built-in
- Amplifier-separated
- CX-400
- CY-100
- EX-10
- EX-20
- EX-30
- EX-40
- CX-440
- EQ-30**
- EQ-500
- MQ-W
- RX-LS200
- RX
- RT-610

ORDER GUIDE

Type	Appearance	Adjustable range (Note)	Model No.	Output
NPN output		0.2 to 2 m 0.656 to 6.562 ft	EQ-34	NPN open-collector transistor
PNP output			EQ-34-PN	PNP open-collector transistor
Two outputs			EQ-34W	Two NPN open-collector transistor outputs

NOTE: Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets (two types).


Note: The adjustable range stands for the maximum sensing range which can be set with the adjuster.
The sensor can detect an object 0.1 m 0.328 ft, or more, away.
However, the detectable range of Near (Sub) type of **EQ-34W** begins at 0.2 m 0.656 ft.

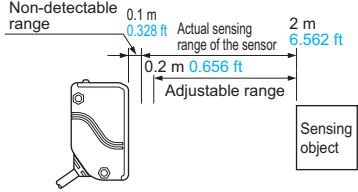


Plug-in connector type (Not available for EQ-34W)

Plug-in connector type (standard: cable type) is also available. (excluding **EQ-34W**)
When ordering this type, suffix "-J" to the model No.
Please order the suitable mating cable separately.
Model No.: **EQ-34-J, EQ-34-PN-J**

• CN-24-C□



• CN-24L-C□

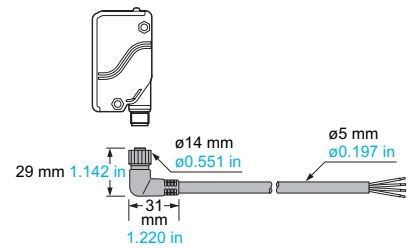

• Mating cable

Type	Model No.	Length	Description
Straight	CN-24-C2	Length: 2 m 6.562 ft	0.34 mm ² 4-core cabtyre cable with connector on one end Cable outer diameter: ø5 mm ø0.197 in
	CN-24-C5	Length: 5 m 16.404 ft	
Elbow	CN-24L-C2	Length: 2 m 6.562 ft	
	CN-24L-C5	Length: 5 m 16.404 ft	

5 m 16.404 ft cable length type

5 m 16.404 ft cable length type (standard : 2 m 6.562 ft) is also available for NPN output type and two outputs type.
When ordering this type, suffix "-C5" to the model No.
Model No.: **EQ-34-C5, EQ-34W-C5**

OPTIONS


Designation	Model No.	Description
Sensor mounting bracket	MS-EQ3-1	Back angled mounting bracket
	MS-EQ3-2	Foot angled mounting bracket

Note: The plug-in connector type does not allow use of some sensor mounting brackets because of the protrusion of the connector.

Sensor mounting bracket


• MS-EQ3-1

Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.



• MS-EQ3-2

Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.




SPECIFICATIONS

Item	Type	NPN output	PNP output	Two outputs
	Model No.	EQ-34	EQ-34-PN	EQ-34W
Adjustable range (Note 2)		0.2 to 2 m 0.656 to 6.562 ft		Far (Main): 0.2 to 2 m 0.656 to 6.562 ft Near (Sub): Refer to diagram in (Note 3)
Sensing range (with white non-glossy paper at setting distance 2 m 6.562 ft)		0.1 to 2 m 0.328 to 6.562 ft		Far (Main): 0.1 to 2 m 0.328 to 6.562 ft Near (Sub): 0.2 to 2 m 0.656 to 6.562 ft [with Near (Sub) distance for adjuster at max.]
Hysteresis		10 % or less of operation distance (With white non-glossy paper)		
Repeatability		Along sensing axis: 10 mm 0.394 in or less, Perpendicular to sensing axis: 1 mm 0.039 in or less (with white non-glossy paper)		
Supply voltage		10 to 30 V DC Ripple P-P 10 % or less		
Current consumption		50 mA or less	55 mA or less	90 mA or less
Output		NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1 V or less (at 100 mA sink current) 0.4 V or less (at 16 mA sink current)	PNP open-collector transistor • Maximum source current: 100 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 1 V or less (at 100 mA source current) 0.4 V or less (at 16 mA source current)	<Far (Main) output, Near (Sub) output> NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1 V or less (at 100 mA sink current) 0.4 V or less (at 16 mA sink current)
	Utilization category	DC-12 or DC-13		
	Output operation	Switchable either Detection-ON or Detection-OFF		
	Short-circuit protection	Incorporated		
Response time		2 ms or less		
Operation indicator		Red LED (lights up when the output is ON)		Far (Main) output: Red LED [lights up when the Far (Main) output is ON] Near (Sub) output: Red LED [lights up when the Near (Sub) output is ON]
Stability indicator		Green LED (lights up under stable light received condition or stable dark condition) (Note 4)		
Distance adjuster		2-turn mechanical adjuster with pointer		Far (Main): 2-turn mechanical adjuster with pointer Near (Sub): Variable adjuster
Automatic interference prevention function		Incorporated (Note 5)		
Environmental resistance	Pollution degree	3 (Industrial environment)		
	Protection	IP67 (IEC)		
	Ambient temperature	-20 to +55 °C -4 to +131 °F (No dew condensation or icing allowed), Storage: -25 to +70 °C -13 to +158 °F		
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH		
	Ambient illuminance	Incandescent light: 3,000 lx at the light-receiving face		
	EMC	EN 60947-5-2		
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure		
	Insulation resistance	20 MΩ, or more, with 250 V megger between all supply terminals connected together and enclosure		
	Vibration resistance	10 to 55 Hz frequency, 1.5 mm 0.059 in amplitude (10 G max.) in X, Y and Z directions for two hours each		
Shock resistance	500 m/s ² acceleration (50 G approx.) in X, Y and Z directions for three times each			
Emitting element		Infrared LED (Peak emission wavelength: 880 nm 0.035 mil , modulated)		
Material		Enclosure: Polyallylate and Polyethylene terephthalate, Lens: Polyallylate		
Cable		0.3 mm ² 3-core (EQ-34W: 4-core) cabtyre cable, 2 m 6.562 ft long		
Cable extension		Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable.		
Weight		Net weight: 150 g approx., Gross weight: 200 g approx.		
Accessory		Adjusting screwdriver: 1 pc.		


Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

- 2) The adjustable range stands for the maximum sensing range which can be set with the adjuster. The sensor can detect an object 0.1 m **0.328 ft**, or more, away. However, the detectable area of the Near (Sub) type of the **EQ-34W** begins at 0.2 m **0.656 ft**.

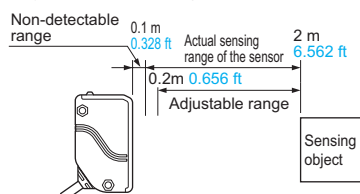

- 4) Refer to "Stability indicator (p.361)" of "PRECAUTIONS FOR PROPER USE" for details of the stability indicator.

- 3) The Near (Sub) distance adjustable range, L₂, changes with the setting of the Far (Main) distance, L₁, as shown in the table below.

EQ-34W Near (Sub) distance adjustable range

EQ-34W	
Far (Main) setting distance L ₁	Near (Sub) distance adjustable range L ₂
2 m 6.562 ft	1 to 2 m 3.281 to 6.562 ft
1.5 m 4.921 ft	0.85 to 1.5 m 2.789 to 4.921 ft
1 m 3.281 ft	0.65 to 1 m 2.133 to 3.281 ft
0.5 m 1.640 ft	0.35 to 0.5 m 1.148 to 1.640 ft
0.2 m 0.656 ft	0.2 m 0.656 ft

- 5) Detection may become unstable depending on the setting conditions or the sensing objects. After setting up this product, make sure to check operations using actual sensing objects.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Power Supply Built-in

Amplifier-separated

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30

EQ-500

MQ-W

RX-LS200

RX

RT-610