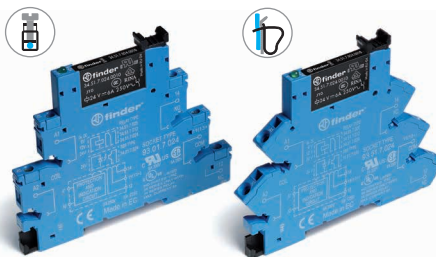


Common features

- Instant ejection of relay by plastic retaining clip
- Integral coil indication and protection circuit
- 35 mm rail (EN 60715) mounting

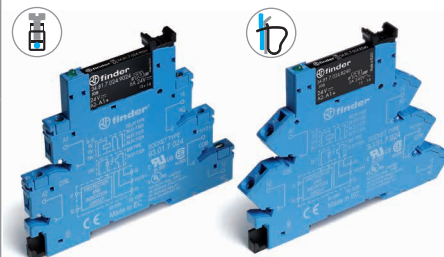
6.2 mm wide

- EMR - DC, AC or AC/DC coil versions
- SSR - DC or AC/DC input versions
- Screw and Screwless terminal options

EMR
Electromechanical Relays
38.51/38.61

- 1 CO - 6 A/250 V AC

Page 1

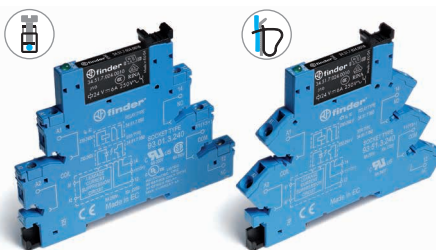
SSR
Solid State Relays
38.81/38.91

- Single solid state output:
Options 0.1 A/48 V DC, 6 A/24 V DC, 2 A/240 V AC
- Silent, high speed switching
- Long electrical life

Page 2

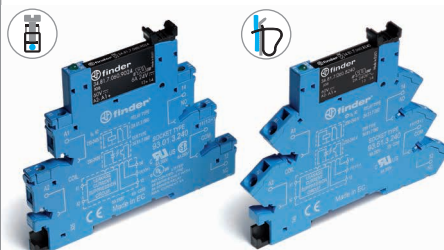
6.2 mm wide

- Special coil/input leakage current suppression types
- EMR - AC or AC/DC coil versions
- SSR - AC or AC/DC input versions
- Screw and Screwless terminal options

38.51.3... - 38.61.3...

- 1 CO - 6 A/250 V AC

Page 1


38.81.3... - 38.91.3...

- Single solid state output:
Options 0.1 A/48 V DC, 6 A/24 V DC, 2 A/240 V AC
- Silent, high speed switching
- Long electrical life

Page 2


6.2 mm wide

- Timed Interface module
- 4 functions & 4 time scales 0.1 s...6 h
- EMR - AC/DC (12 or 24 V) supply versions
- SSR - AC/DC (24 V) supply
- Screw terminals

38.21

- 1 CO - 6 A/250 V AC

Page 3

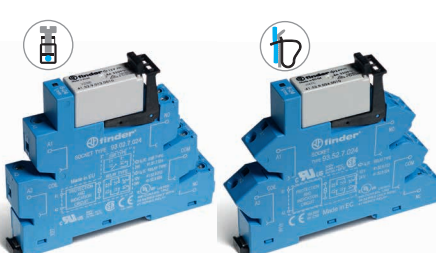
38.21...9024-8240

- Single solid state output:
Options 6 A/24 V DC, 2 A/240 V AC
- Silent, high speed switching
- Long electrical life

Page 3

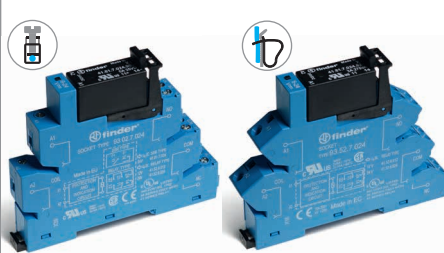
14 mm wide

- 2 pole 8 A or 1 pole 16 A
- EMR - DC or AC/DC coil versions
- SSR - DC input versions
- Screw and Screwless terminal options

38.01/38.52/38.11/38.62

- 1 CO - 16 A/250 V AC
- 2 CO - 8 A/250 V AC

Page 4

38.31/38.41

- Single solid state output:
Options 5 A/24 V DC, 3 A/240 V AC
- Silent, high speed switching
- Long electrical life

Page 5

