

Relay Module - RIF-1-RPT-LDP-24DC/1X21 - 2903342

Technical data

Connection data output side

Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ² (with or without ferrule)
Conductor cross section AWG	26 ... 16

General


Type of note	Notes on operation
Note	FBS 2-6... plug-in bridge for the input side (A2) and FBS-2-8... plug-in bridge for the output side (11/21)
Test voltage relay winding/relay contact	4 kV _{rms} (50 Hz, 1 min.)
Operating mode	100% operating factor
Degree of protection	IP20 (Relay socket)
	RT III (Relay)
Mechanical service life	approx. 3x 10 ⁷ cycles
Mounting position	any
Assembly instructions	In rows with zero spacing

Standards and Regulations

Standards/regulations	DIN EN 50178
	IEC 62103
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	6 kV/safe isolation
Degree of pollution	2
Overvoltage category	III


Drawings

Circuit diagram



DC coils


Diagram

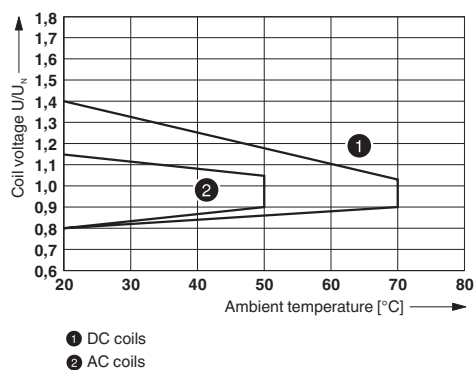


Operating voltage range

Relay Module - RIF-1-RPT-LDP-24DC/1X21 - 2903342

Diagram

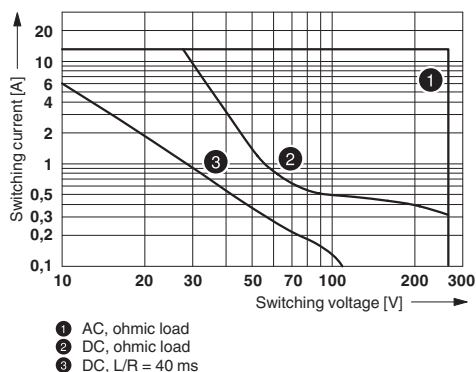


Diagram

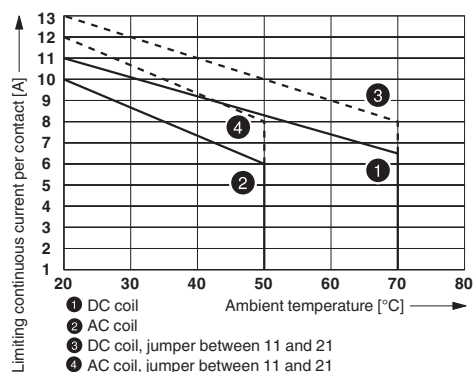


Interrupting rating

Contact derating

Diagram

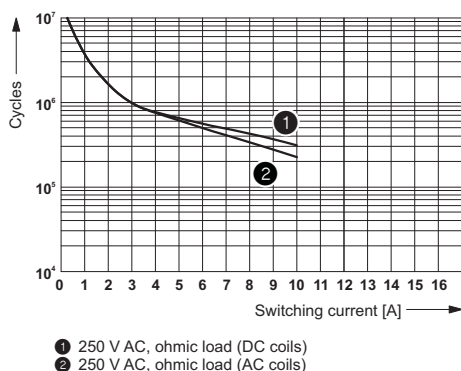

Diagram

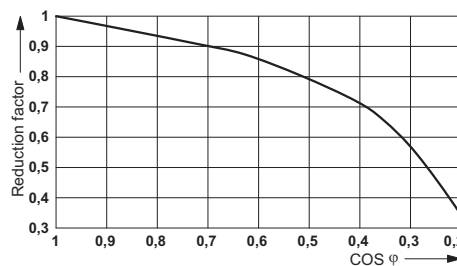

Electrical service life

Service life reduction factor

Articles in set

Relay socket - RIF-1-BPT/2X21 - 2900931



RIF-1... relay base, for miniature power relay with 1 or 2 PDTs or solid-state relays of the same design, push-in connection, plug-in option for input/suppressor modules, for mounting on NS 35/7,5

Single relay - REL-MR- 24DC/21HC - 2961312



Plug-in miniature power relay, with power contact for high continuous currents, 1 PDT, input voltage 24 V DC