

Fig. 2 - Test Circuit

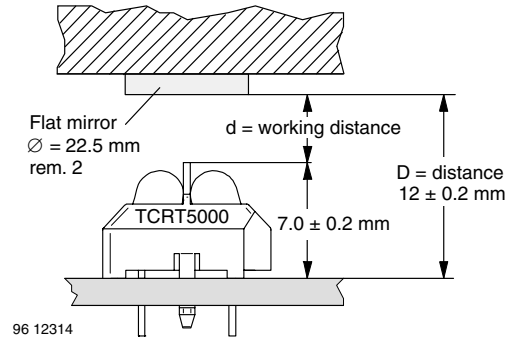


Fig. 3 - Test Circuit

BASIC CHARACTERISTICS

$T_{amb} = 25^\circ\text{C}$, unless otherwise specified

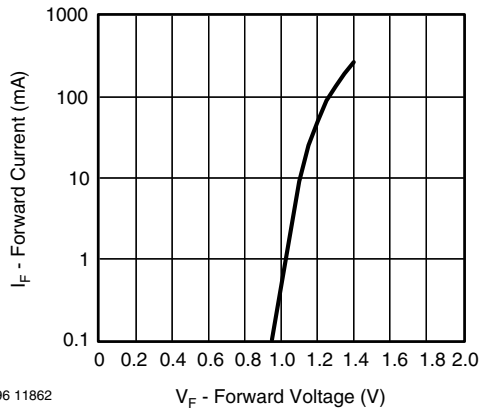


Fig. 4 - Forward Current vs. Forward Voltage

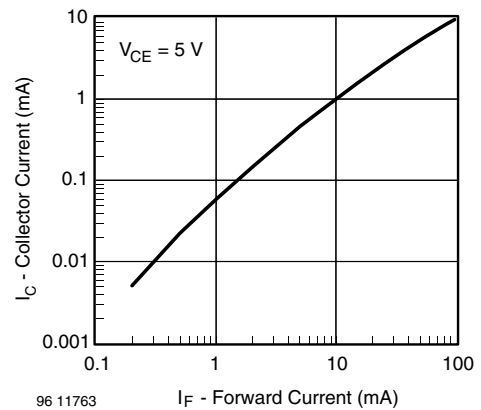


Fig. 6 - Collector Current vs. Forward Current

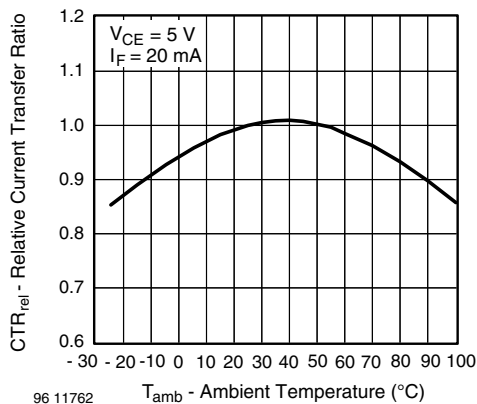


Fig. 5 - Relative Current Transfer Ratio vs. Ambient Temperature

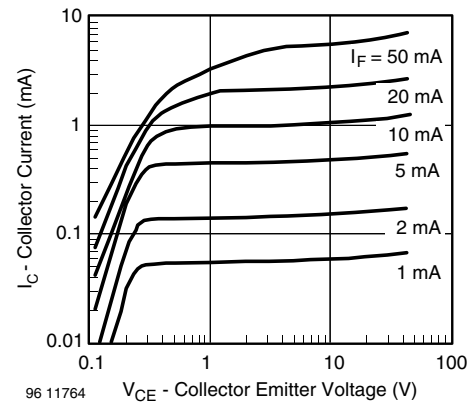


Fig. 7 - Collector Emitter Saturation Voltage vs. Collector Current

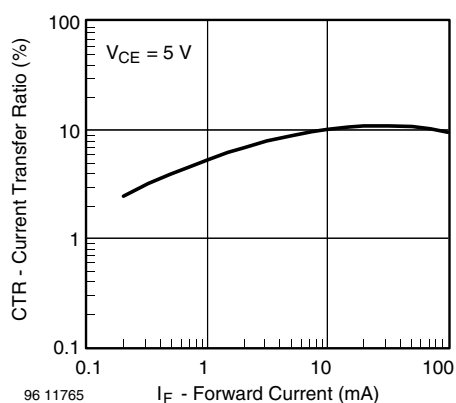


Fig. 8 - Current Transfer Ratio vs. Forward Current


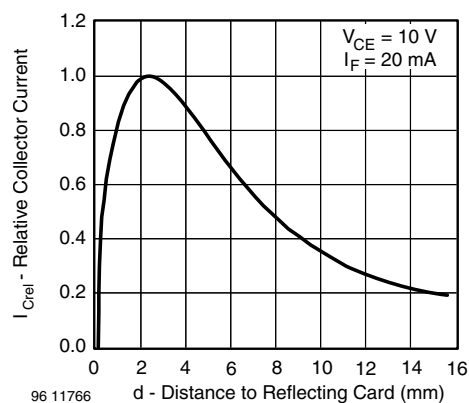




Fig. 9 - Relative Collector Current vs. Distance

PACKAGE DIMENSIONS in millimeters, TCRT5000

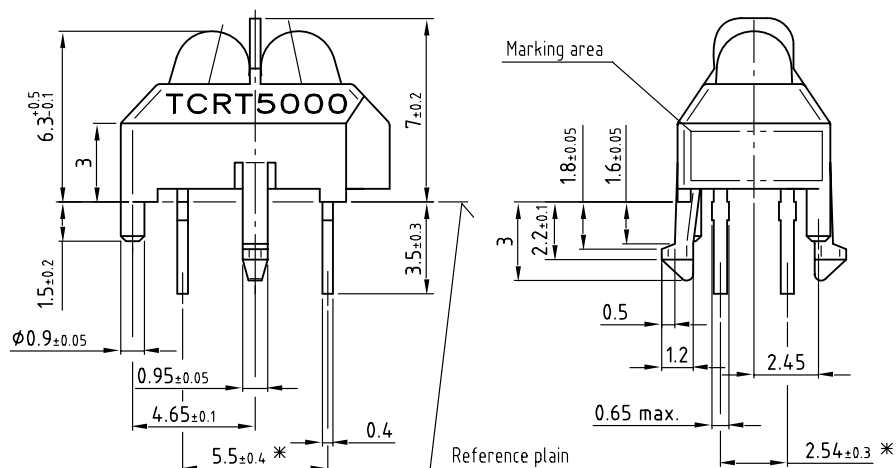

* Tolerances related to reference plain

weight: ca. 0.23g

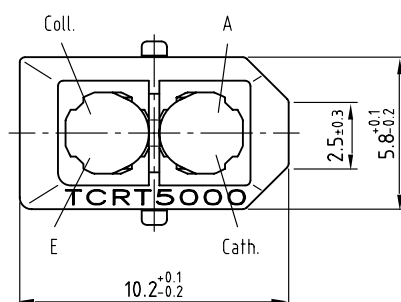

Drawing-No.: 6.550-5096.01-4

Issue: 4; 11.04.02

96 12073

Footprint Top View

