



CR-1025




SPECIFICATIONS	
Name	CR-1025
Nominal voltage [V]	3
Nominal capacity [mAh]	30
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	0.7


DISCHARGE TEMPERATURE CHARACTERISTICS

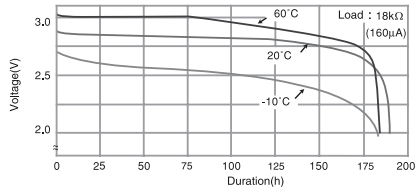


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

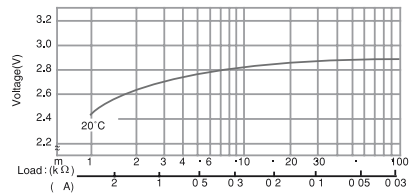

CAPACITY VS. LOAD RESISTANCE

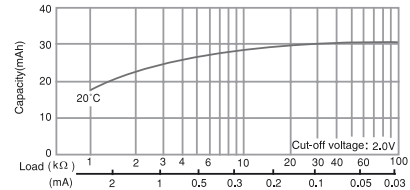


CR-1216




SPECIFICATIONS	
Name	CR-1216
Nominal voltage [V]	3
Nominal capacity [mAh]	25
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	0.7


DISCHARGE TEMPERATURE CHARACTERISTICS

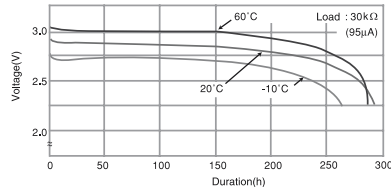


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

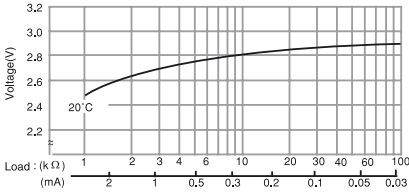

CAPACITY VS. LOAD RESISTANCE

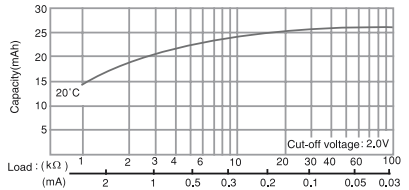


CR-1220




SPECIFICATIONS	
Name	CR-1220
Nominal voltage [V]	3
Nominal capacity [mAh]	35
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.2


DISCHARGE TEMPERATURE CHARACTERISTICS

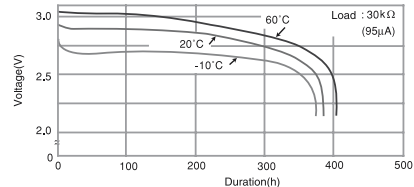


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

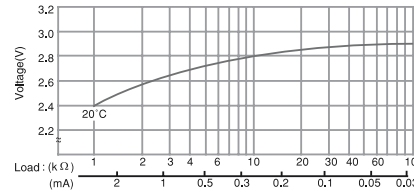

CAPACITY VS. LOAD RESISTANCE

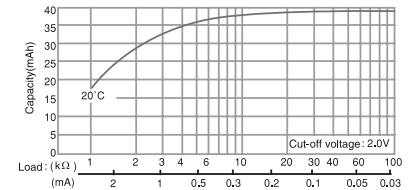


CR-1612




SPECIFICATIONS	
Name	CR-1612
Nominal voltage [V]	3
Nominal capacity [mAh]	40
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	0.8


DISCHARGE TEMPERATURE CHARACTERISTICS

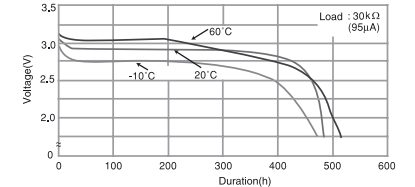

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

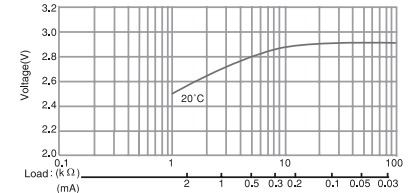


CAPACITY VS. LOAD RESISTANCE

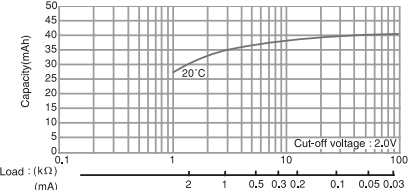

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.


The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.

CR-1616




SPECIFICATIONS	
Name	CR-1616
Nominal voltage [V]	3
Nominal capacity [mAh]	55
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.2


DISCHARGE TEMPERATURE CHARACTERISTICS

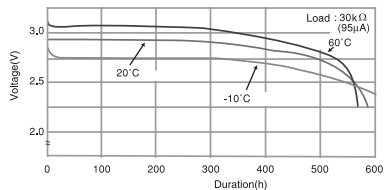


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

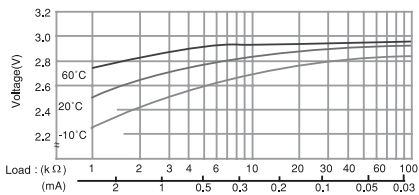

CAPACITY VS. LOAD RESISTANCE

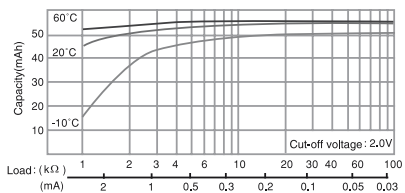


CR-1620




SPECIFICATIONS	
Name	CR-1620
Nominal voltage [V]	3
Nominal capacity [mAh]	75
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.3


DISCHARGE TEMPERATURE CHARACTERISTICS

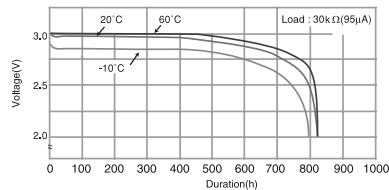


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

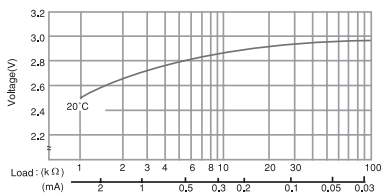

CAPACITY VS. LOAD RESISTANCE

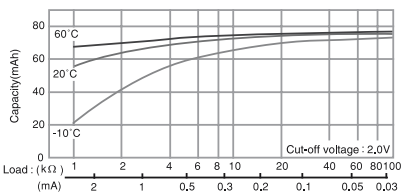


CR-1632




SPECIFICATIONS	
Name	CR-1632
Nominal voltage [V]	3
Nominal capacity [mAh]	140
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.8


DISCHARGE TEMPERATURE CHARACTERISTICS

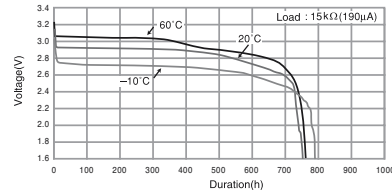


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

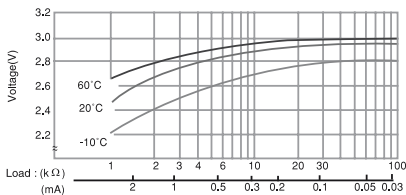

CAPACITY VS. LOAD RESISTANCE

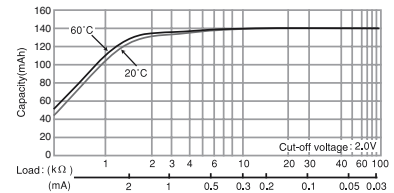


CR-2012




SPECIFICATIONS	
Name	CR-2012
Nominal voltage [V]	3
Nominal capacity [mAh]	55
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.4


DISCHARGE TEMPERATURE CHARACTERISTICS

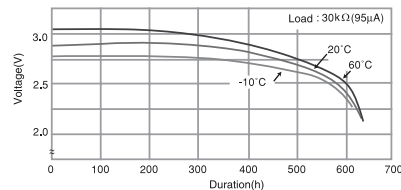

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

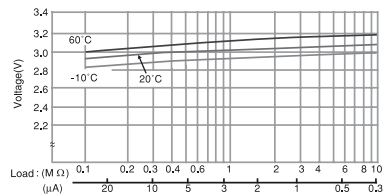

CAPACITY VS. LOAD RESISTANCE

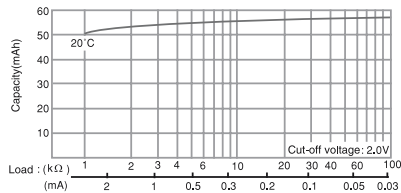

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.