


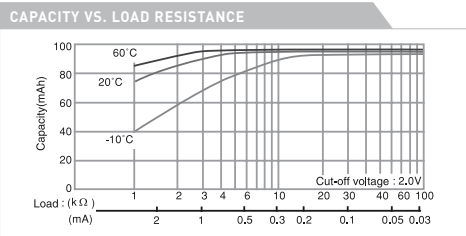



CR-2016

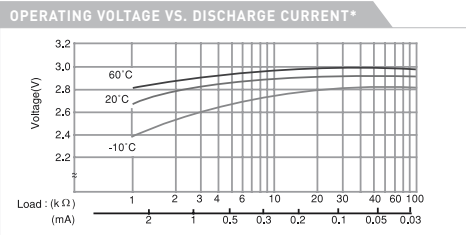




SPECIFICATIONS	
Name	CR-2016
Nominal voltage [V]	3
Nominal capacity [mAh]	90
Continuous drain [mA]	0.1
Operating temperature [°C]	-30 to +60
Weight [g]	1.6

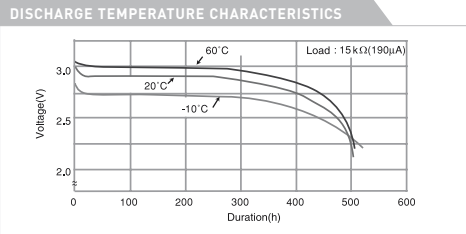


CR-2025






SPECIFICATIONS	
Name	CR-2025
Nominal voltage [V]	3
Nominal capacity [mAh]	165
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	2.3

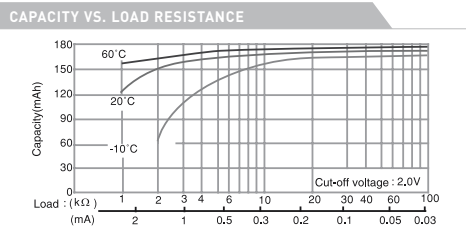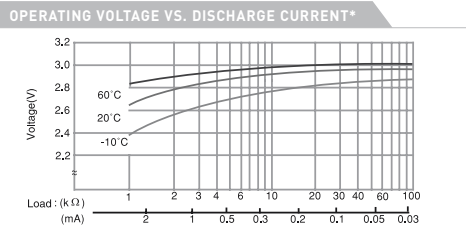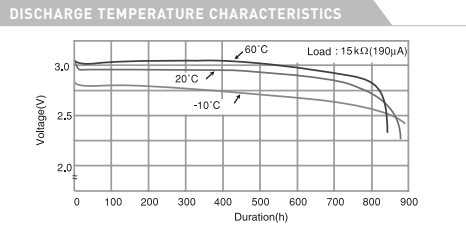

CR-2032






SPECIFICATIONS	
Name	CR-2032
Nominal voltage [V]	3
Nominal capacity [mAh]	220
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	2.9

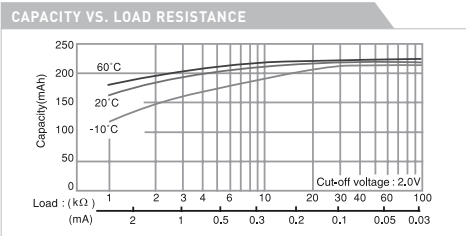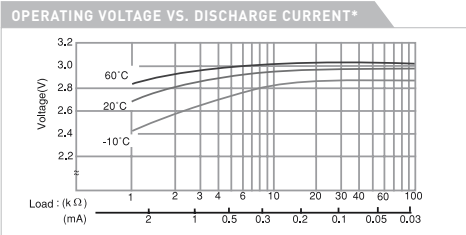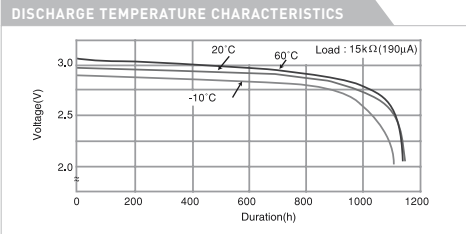

Lithium battery holders for CR-2032


These battery holders are designed for sure and easy loading/removal of Panasonic Coin Type Lithium batteries in/from equipment enabling the batteries to fully exploit their capabilities as the back-up power supply in C-MOS RAM memory and microcomputer memory. All of the battery holders are designed to prevent inverted insertion of the battery.

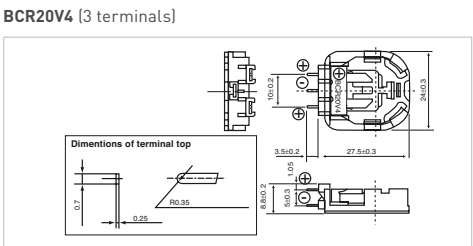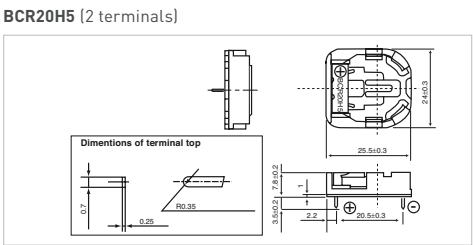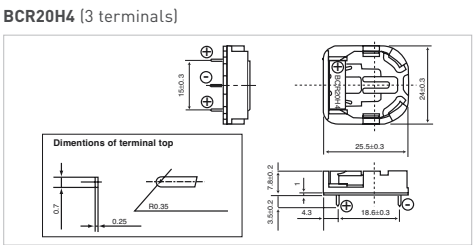




Precaution for washing battery holders

The battery holders can be adversely affected by some detergents use in the circuit board washing process and may result in cracks forming in the holder. Please test the holders in your washing process before use.


CR-2330






SPECIFICATIONS	
Name	CR-2330
Nominal voltage [V]	3
Nominal capacity [mAh]	265
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	3.8

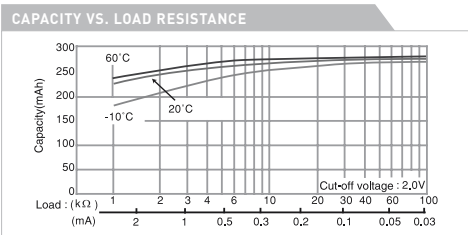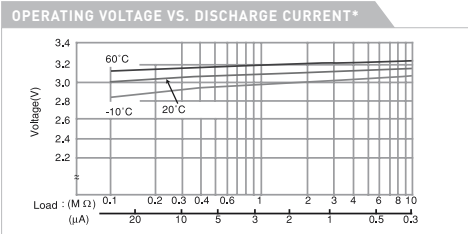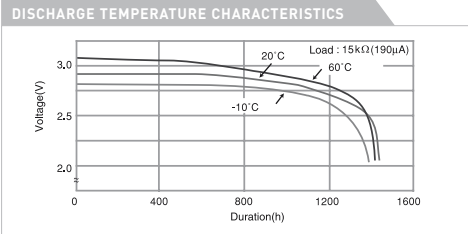


CR-2354






SPECIFICATIONS	
Name	CR-2354
Nominal voltage [V]	3
Nominal capacity [mAh]	560
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	5.8

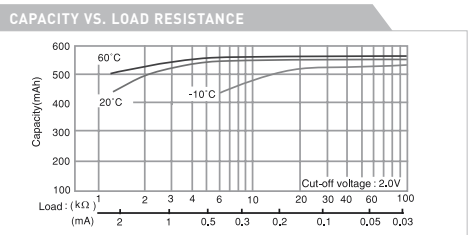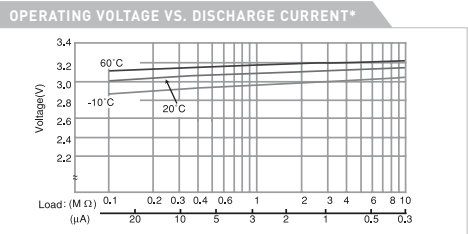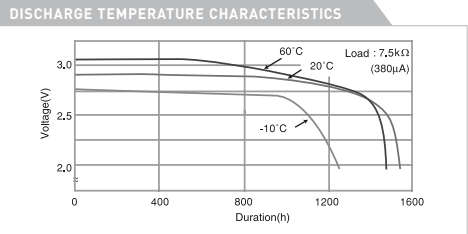


CR-2412






SPECIFICATIONS	
Name	CR-2412
Nominal voltage [V]	3
Nominal capacity [mAh]	100
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	2.0

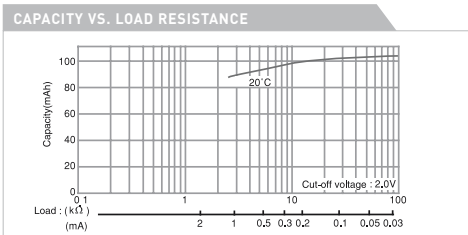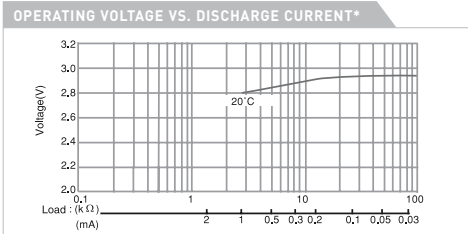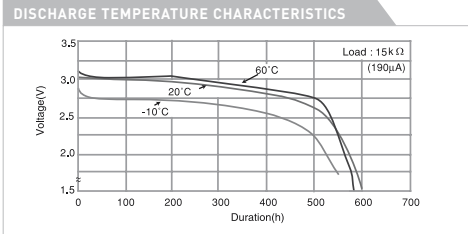

CR-2450



SPECIFICATIONS	
Name	CR-2450
Nominal voltage [V]	3
Nominal capacity [mAh]	620
Continuous drain [mA]	0.2
Operating temperature [°C]	-30 to +60
Weight [g]	6.3

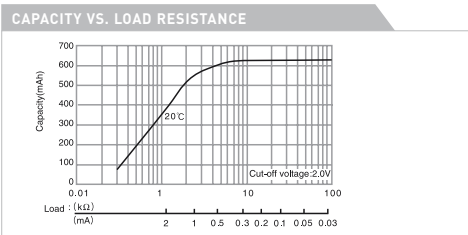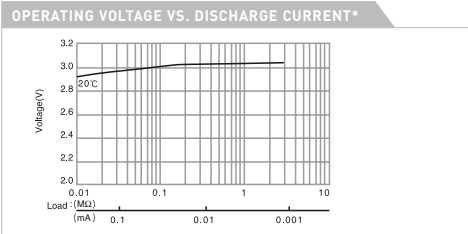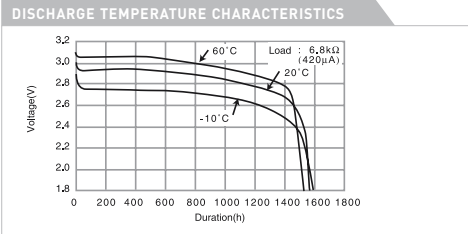

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
* Voltage at 50% discharge depth.