Data sheet | Item number: 787-1711

Switched-mode power supply; Eco; 1-phase; 12 VDC output voltage; 4 A output current; DC-OK LED

www.wago.com/787-1711

RoHS ✓ Compliant

BOMcheck.net

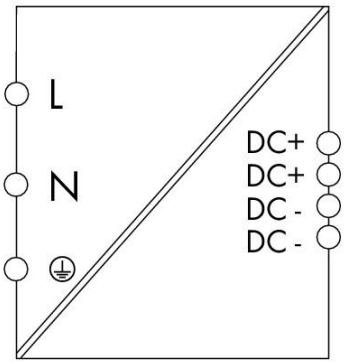

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at {0}.

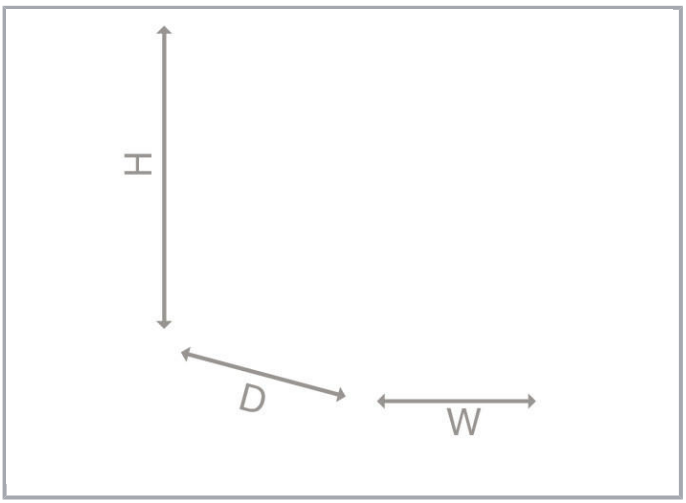

Item description

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

Data
Technical Data

Input

Phases	1
Nominal input voltage $U_{i\,nom}$	AC 100 … 240 V
Input voltage range	AC 90 … 264 V; DC 125 … 375 V
Nominal mains frequency range	47 … 63 Hz; 0 Hz
Input current I_i	≤ 1,8 A (100 VAC)
Discharge current	≤ 3,5 mA
Inrush current	≤ 18 A
Power factor correction (PFC)	Passive
Mains failure hold-up time	≥ 10 ms (230 VAC)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at {0}.