


Table 2. Part numbers

Size	Rated current (Amps)	Rated voltage (V a.c.)	gG/gL dual indicator	Pack quantity
			Voltage conducting metal gripping lugs	
000	2	690	2NHG000B-690	3
	4		4NHG000B-690	
	6		6NHG000B-690	
	10		10NHG000B-690	
	16		16NHG000B-690	
	20		20NHG000B-690	
	25		25NHG000B-690	
	32		32NHG000B-690	
	35		35NHG000B-690	
	40		40NHG000B-690	
	50		50NHG000B-690	
	63		63NHG000B-690	
	00		50	
63		63NHG00B-690		
80		80NHG00B-690		
100		100NHG00B-690		
125		125NHG00B-690		
160		160NHG00B-660		
1	50	690	50NHG1B-690	
	63		63NHG1B-690	
	80		80NHG1B-690	
	100		100NHG1B-690	
	125		125NHG1B-690	
	160		160NHG1B-690	
	200		200NHG1B-690	
	224		224NHG1B-690	
	250		250NHG1B-690	
2	200		200NHG2B-690	
	224		224NHG2B-690	
	250		250NHG2B-690	
	315		315NHG2B-690	
3	250		250NHG3B-690	
	315		315NHG3B-690	
	355		355NHG3B-690	
	400		400NHG3B-690	
	425		425NHG3B-690	
	500		500NHG3B-690	
4	630		630NHG4B-690	1
	800		800NHG4B-690	

\* Available upon request

Time-current curves - NH Size 000

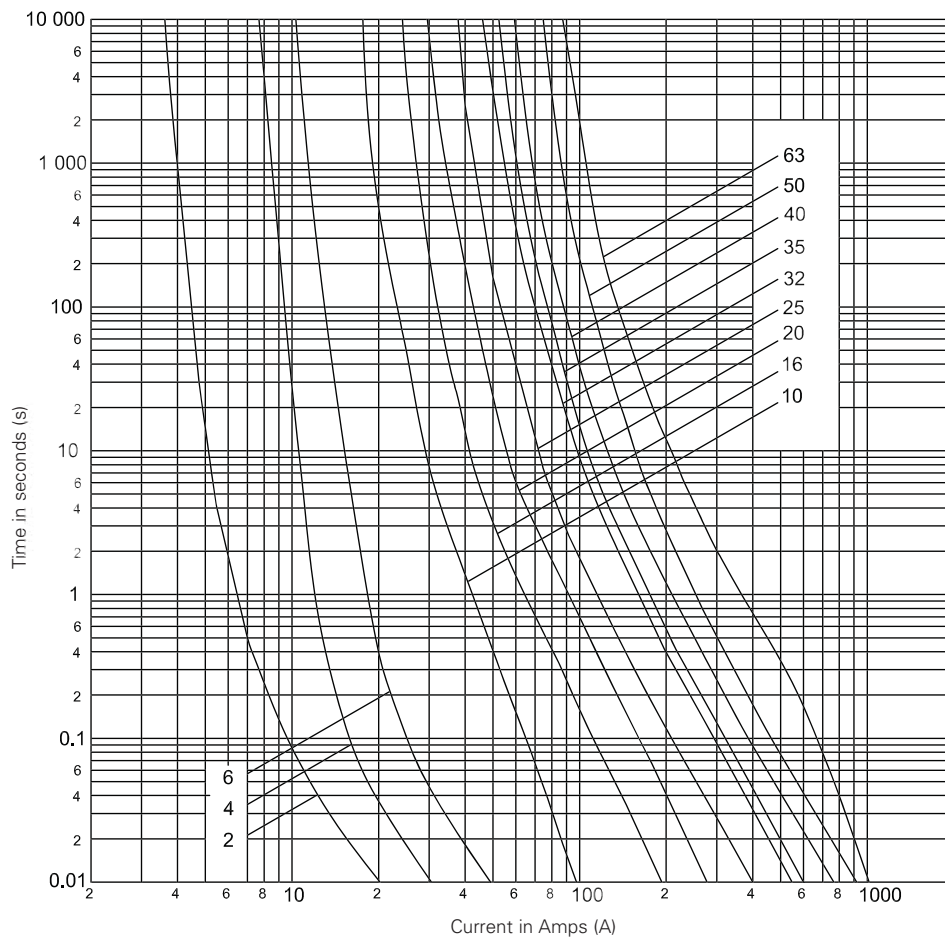

Technical data - NH size 000

Part numbers with metal gripping lugs	Fuse link size	Rated current (Amps)	Rated voltage (V a.c.)	I <sup>2</sup> t (Amps <sup>2</sup> Seconds)			Net weight per fuse (kg)
				Minimum pre-arcing	*I <sub>b</sub> 120kA at 690 V a.c.	Watts loss	
2NHG000B-690	000	2	690	3.5	8	4	0.118
4NHG000B-690		4		6	16	2	
6NHG000B-690		6		14	25	2	
10NHG000B-690		10		60	400	1.5	
16NHG000B-690		16		240	1200	2.5	
20NHG000B-690		20		500	2500	2.5	
25NHG000B-690		25		920	4400	3.5	
32NHG000B-690		32		1800	9600	3.5	
35NHG000B-690		35		2800	15,000	4	
40NHG000B-690		40		3300	15,000	4	
50NHG000B-690		50		6100	26,500	5.5	
63NHG000B-690		63		6500	30,500	5.5	

\*I<sub>b</sub> is the maximum breaking capacity test at rated voltage according to IEC 60269 requirements