



Time-current characteristics — 1-20A:

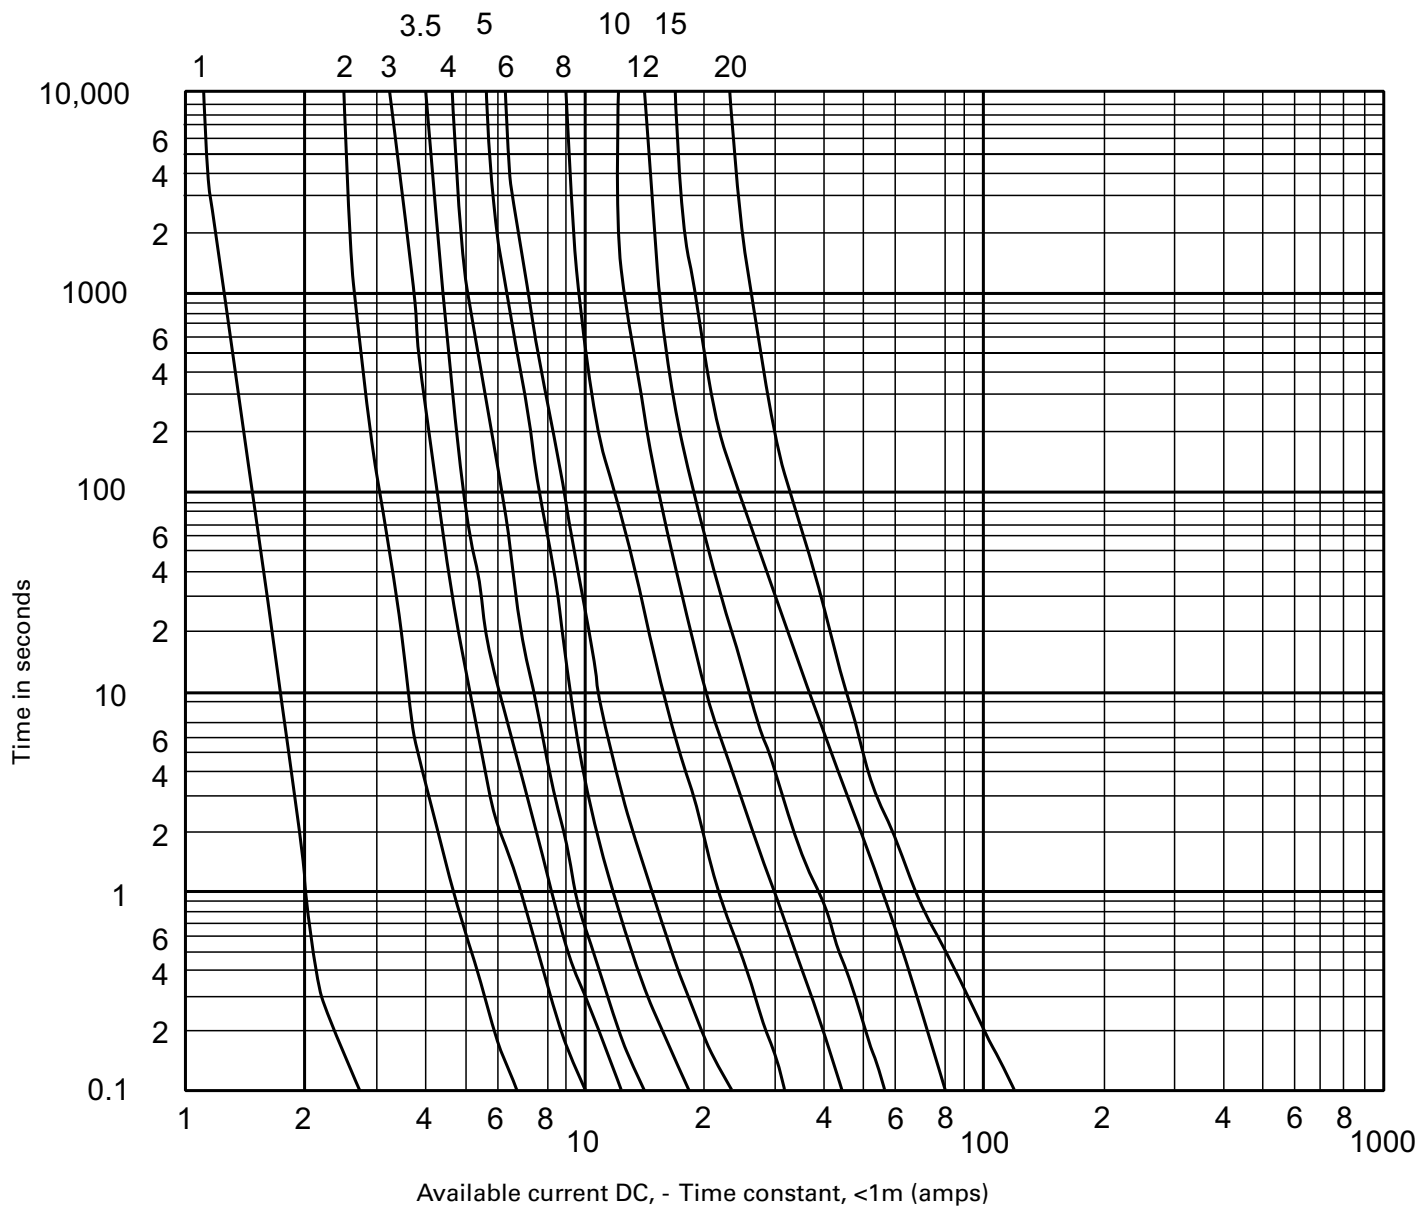

Temperature derating curves — 1-20A:

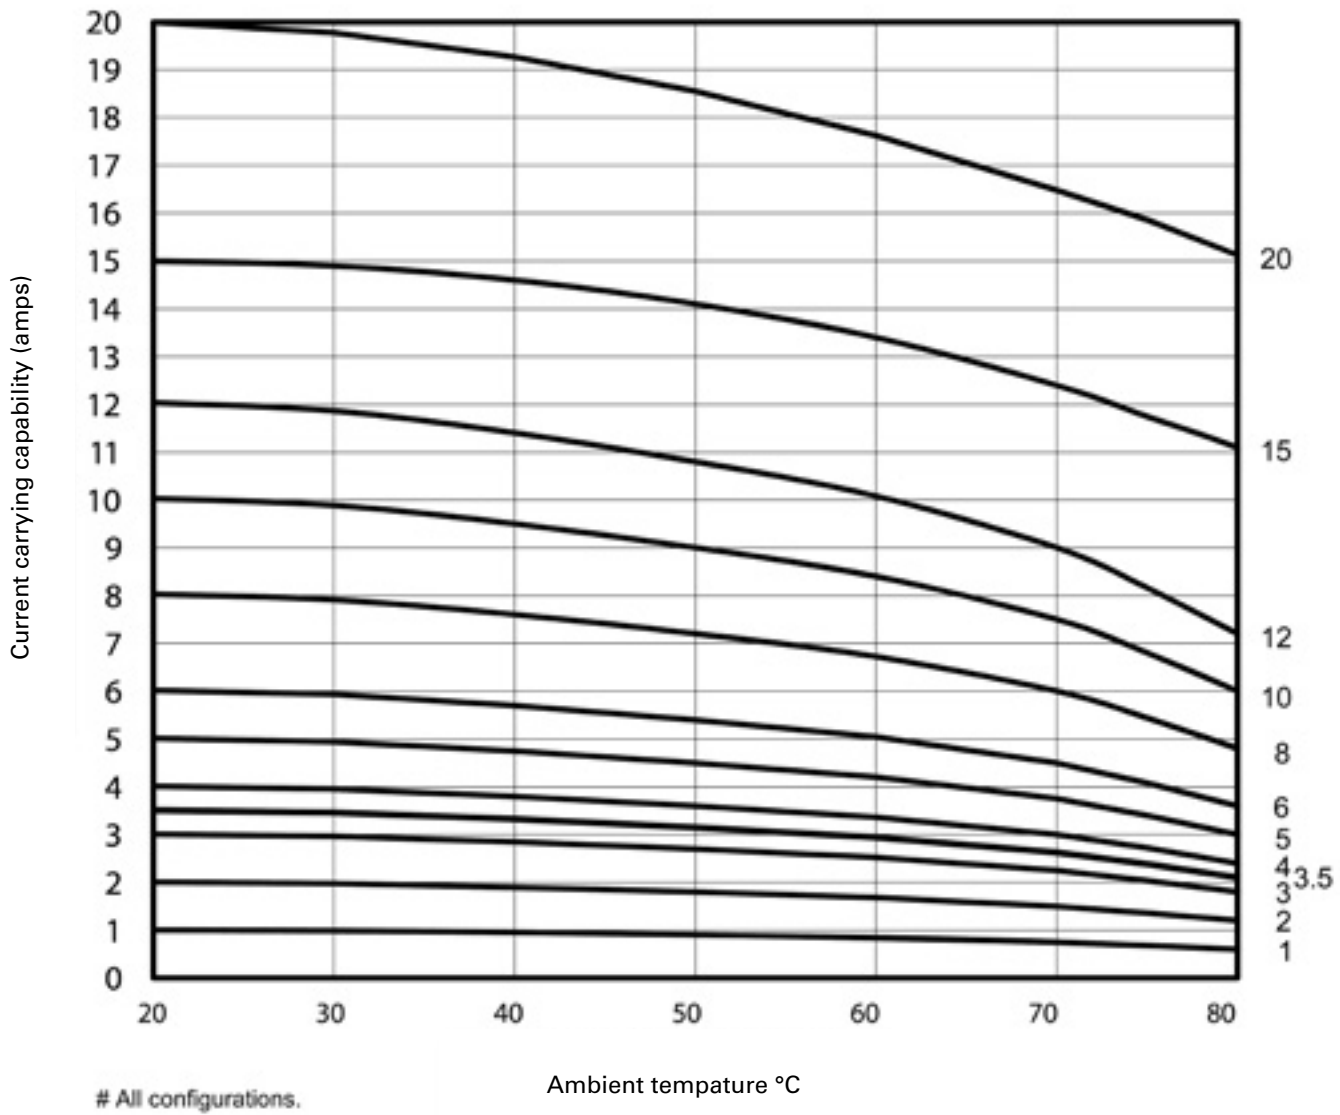

No additional derating is required for PV fuse links installed in ganged modular fuse holders without spacing between units, provided that the rating used is $>1.56 \times I_{sc}$.