


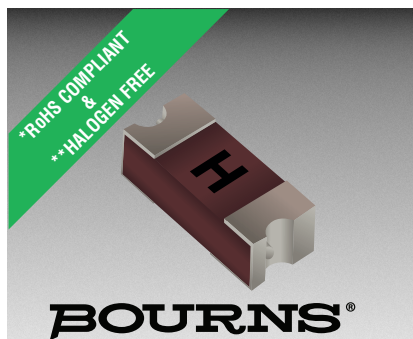

## SinglFuse™ SF-2410SPxxxW Series Features

- Single blow fuse for overcurrent protection
- 6125 (EIA 2410) footprint
- Time lag fuse
- UL 248-14 listed
- RoHS compliant\* and halogen free\*\*
- Wire core SMD design
- Surface mount packaging for automated assembly
- High AC power one-time protection fuse

## SF-2410SPxxxW Series - Time Lag Wire Core Surface Mount Fuses

### Electrical Characteristics

| Model           | Rated Current (Amps) | Fusing Time                                 | Resistance (Ω) Typ.*** | Rated Voltage | Interrupting Rating             | Voltage Drop Max. (mV) | Typical I <sup>2</sup> t (A <sup>2</sup> s) **** |
|-----------------|----------------------|---------------------------------------------|------------------------|---------------|---------------------------------|------------------------|--------------------------------------------------|
| SF-2410SP050W-2 | 0.50                 | Open within 120 sec. at 200 % rated current | 0.206                  | AC 250 V      | AC 250 V 100 A<br>DC 125 V 50 A | 166                    | 0.11                                             |
| SF-2410SP063W-2 | 0.63                 |                                             | 0.148                  |               |                                 | 144                    | 0.20                                             |
| SF-2410SP080W-2 | 0.80                 |                                             | 0.109                  |               |                                 | 139                    | 0.35                                             |
| SF-2410SP100W-2 | 1.00                 |                                             | 0.084                  |               |                                 | 129                    | 0.62                                             |
| SF-2410SP125W-2 | 1.25                 |                                             | 0.065                  |               |                                 | 128                    | 1.00                                             |
| SF-2410SP160W-2 | 1.60                 |                                             | 0.049                  |               |                                 | 127                    | 1.80                                             |
| SF-2410SP200W-2 | 2.00                 |                                             | 0.038                  |               |                                 | 123                    | 3.00                                             |

\*\*\* Resistance value measured with ≤10 % rated current at 25 °C ambient.

\*\*\*\* Melting I<sup>2</sup>t calculated at 0.001 second pre-arcing time.

### Reliability Testing

| No. | Test                      | Requirement                                                                                           | Test Condition                                                                         | Test Reference         |
|-----|---------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------|
| 1   | Reflow and bend           | DCR change ≤ 20 % (≤ 10 % for ≤1 A)<br>No mechanical damage                                           | 3 reflows at 245 °C followed by a 2 mm bend                                            | Refer to STP document  |
| 2   | Solderability             | Minimum 90 % coverage                                                                                 | One dip at 245 °C for 5 seconds                                                        | MIL-STD-202 Method 208 |
| 3   | Soldering heat resistance | DCR change ≤ 20 % (≤ 10 % for ≤1 A)<br>New solder coverage ≤ 75 %                                     | One dip at 260 °C for 10 seconds                                                       | MIL-STD-202 Method 210 |
| 4   | Moisture resistance       | DCR change ≤ ±15 %<br>No excessive corrosion                                                          | 10 cycles                                                                              | MIL-STD-202 Method 106 |
| 5   | Salt spray                | DCR change ≤ ±10 %<br>No excessive corrosion                                                          | 48 hour exposure, 5 % salt solution                                                    | MIL-STD-202 Method 101 |
| 6   | Mechanical vibration      | DCR change ≤ ±10 %<br>No mechanical damage                                                            | 0.4 inch D.A. or 30 G between 5-3000 Hz                                                | MIL-STD-202 Method 204 |
| 7   | Mechanical shock          | DCR change ≤ ±10 %<br>No mechanical damage                                                            | 1500 G, 0.5 ms, half-sine shocks                                                       | MIL-STD-202 Method 213 |
| 8   | Thermal Shock             | DCR change ≤ ±10 %<br>No mechanical damage                                                            | 100 cycles between -65 °C and +125 °C                                                  | MIL-STD-202 Method 107 |
| 9   | Life                      | No electrical “opens” during testing<br>Voltage drop change shall be less than ±20 % of initial value | 80 % rated current (75 % for < 1 A fuses) for 2000 hours at ambient temperature +25 °C | Refer to STP document  |

### Agency Recognition

UL File Number ..... E198545

<http://www.ul.com/> Follow link to Online Certificates Directory, then enter UL File No. E198545, or [click here](#)

## BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: [asiacus@bourns.com](mailto:asiacus@bourns.com)

EMEA: Tel: +36 88 520 390 • Email: [euocus@bourns.com](mailto:euocus@bourns.com)

The Americas: Tel: +1-951 781-5500 • Email: [americus@bourns.com](mailto:americus@bourns.com)  
[www.bourns.com](http://www.bourns.com)

\* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

\*\* Bourns considers a product to be “halogen free” if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

“SinglFuse” is a trademark of Bourns, Inc.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

## SinglFuse™ SF-2410SPxxxW Series Applications

- White goods
- Lighting ballasts
- LED drivers
- Medical equipment (*excluding critical life support*)
- DC/DC converters
- Power chargers
- Power adapters
- Industrial equipment

## SF-2410SPxxxW Series - Time Lag Wire Core Surface Mount Fuses

**BOURNS®**

### Environmental Characteristics

|                                 |                                 |
|---------------------------------|---------------------------------|
| Operating Temperature.....      | -55 °C to +125 °C               |
| Storage Conditions              |                                 |
| Temperature .....               | +5 °C to +35 °C                 |
| Humidity.....                   | 40 % to 75 %                    |
| Shelf Life.....                 | 2 years from manufacturing date |
| Moisture Sensitivity Level..... | 1                               |
| ESD Classification (HBM).....   | Class 6                         |

### Typical Part Marking

Represents total content. Layout may vary.




RATED CURRENT (A)  
 C = 0.50    F = 1.25  
 S = 0.63    T = 1.60  
 H = 0.80    I = 2.00  
 E = 1.00

### How to Order

#### SF - 2410 SP 100 W - 2

SinglFuse™  
 Product Designator  
 SMD Footprint  
 2410 = 6125 (EIA 2410) size  
 Fuse Blow Type  
 SP = Time Lag  
 Rated Current  
 050 ~ 200 (0.5 A ~ 2.0 A)  
 Structure Type  
 W = Wire Core  
 Packaging Type  
 - 2 = Tape & Reel



### Construction

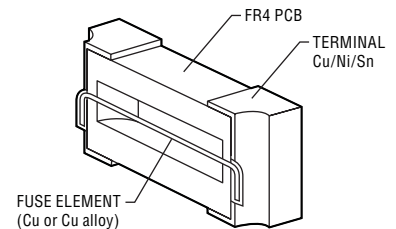


### Packaging Quantity

2,000 pieces per 7-inch reel


### Product Dimensions

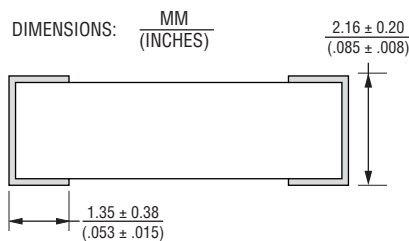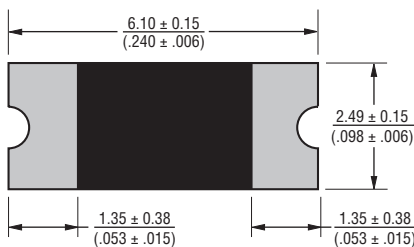

### Recommended Pad Layout

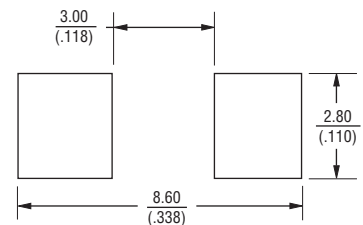

### Current Rating Thermal Derating Curve

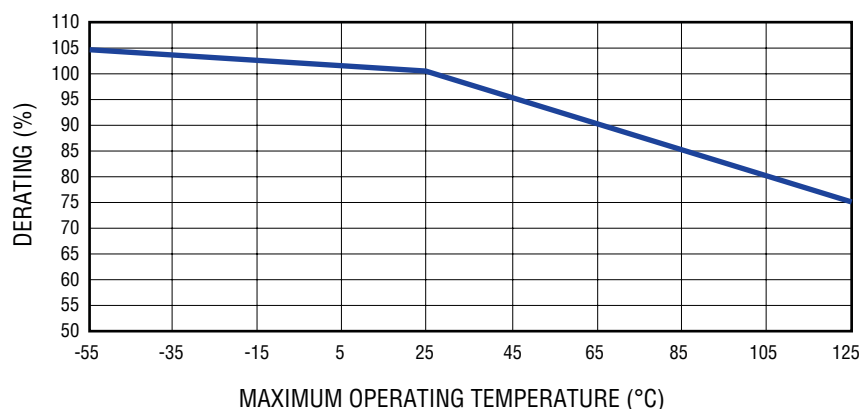

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Users should verify actual device performance in their specific applications.