

EMC Specifications

EMC Emission		EN 60601-1-2 edition 4 (Medical Devices)	
	- Conducted Emissions		EN 55011 class B (internal filter)
			EN 55014-1
			EN 55032 class B (internal filter)
	- Radiated Emissions		FCC Part 15, class B
			FCC Part 18, class B
			EN 55011 class B (internal filter)
	- Harmonic Current Emissions		EN 55014-1
			EN 55032 class B (internal filter)
			FCC Part 15, class B
	- Voltage Fluctuations & Flicker		FCC Part 18, class B
			EN 61000-3-2, class A
			EN 61000-3-3
EMC Immunity		EN 55024 (IT Equipment)	
	- Electrostatic Discharge	Air: Contact: L to L:	EN 60601-1-2 edition 4 (Medical Devices)
			EN 55014-2 (Household Appliances Tools)
			EN 61000-4-2, ± 15 kV, perf. criteria A
	- RF Electromagnetic Field	230 VAC / 50 Hz:	EN 61000-4-2, ± 8 kV, perf. criteria A
	- EFT (Burst)		EN 61000-4-3, 20 V/m, perf. criteria A
	- Surge		EN 61000-4-4, ± 2 kV, perf. criteria A
	- Conducted RF Disturbances	115 VAC / 60 Hz:	EN 61000-4-5, ± 1 kV, perf. criteria A
	- PF Magnetic Field		EN 61000-4-6, 20 Vrms, perf. criteria A
	- Voltage Dips & Interruptions		EN 61000-4-8, 30 A/m, perf. criteria A
		EN 61000-4-11	
		30%, perf. criteria A, 25 periods	
		60%, perf. criteria A, 1 periods	
		>95%, perf. criteria A, 1 period	
		>95%, perf. criteria A, 250 periods	
		EN 61000-4-11	
		30%, 25 periods, perf. criteria A	
		60%, 1 periods, perf. criteria A	
		>95%, 1 period, perf. criteria A	
		>95%, 250 periods, perf. criteria A	

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Storage Temperature	-40°C to +85°C
Power Derating	- High Temperature	see application note
	- Low Input Voltage	www.tracopower.com/overview/tp15a-d 4 %/V below 90V
Cooling system		Natural convection (no internal fan, 20 LFM)
Altitude during Operation		5000 m max.
Switching Frequency		75 - 95 kHz (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	5'657 VDC
	- Input to Case or PE, 60 s	2'121 VDC
	- Output to Case or PE, 60 s	2'121 VDC
Isolation Resistance		100 MOhm min.
Leakage Current (264 VAC)		75 μ A max.
Creepage		8 mm min.
Clearance		8 mm min.
Reliability		3'100'000 h (acc. to MIL-HDBK-217F)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Environment	- Vibration - Mechanical Shock	IEC 60068-2-6 IEC 60068-2-27
Connection Type	THD (through-hole device)	
Weight	16.5 g	
Environmental Compliance	- Reach - RoHS	www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tpp15a-d

Outline Dimensions

12, 15, 24, 36, and 48 VDC models - without heatsink

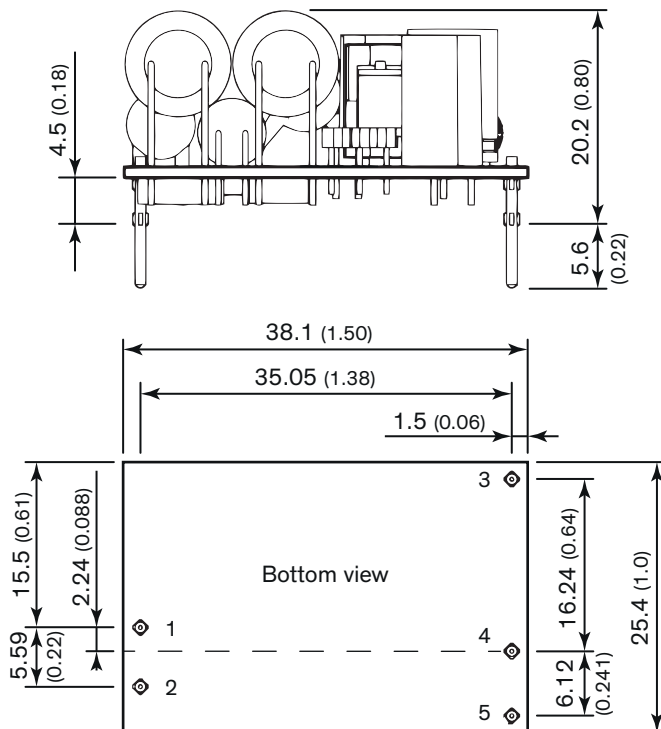

PCB Pinout	
Pin	Function
1	Neutral
2	Line
3	Trim
4	-Vout
5	+Vout

Print thickness: 1.0 mm (0.04 inch)

Pin diameter: 1.0 mm (0.04 inch)

Dimension in mm, () = inch

Tolerances: x.x ± 0.50 (± 0.02)

x.xx ± 0.25 (± 0.01)

Pin pitch tolerance: ± 0.25 (± 0.010)

Pin dimension tolerance: ± 0.10 (± 0.004)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.