


- High power density 3" x 5.8" encased medical power supply
- 450 Watt up to 65°C without derating
320 Watt fanless operation without derating up to 50°C
- Medical certification to IEC/EN/ES 60601-1 3rd edition for 2xMOPP
- EMC compliance to IEC/EN/ES 60601-1-2 4th edition
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Isolation (4000 VAC) and leakage current (< 100 µA) rated for BF applications
- Standard features: 5 V standby output
12 V aux output, Remote On/Off, Power Good Signal, variable fan speed
- Operating up to 5000 m altitude
- 5 year product warranty

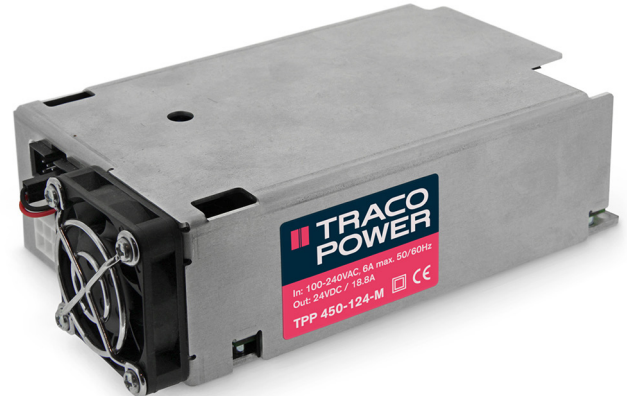

IEC 60601-1 ES 60601-1
UL 62368-1

The TPP 450 Series of 450 Watt AC/DC power supplies feature a reinforced double I/O isolation system according to latest medical safety standards (60601-1 3rd edition, 2 × MOPP). The earth leakage current is below 100 µA what makes the units suitable for BF (body floating) applications. The excellent efficiency of up to 94% allows a high power density for the standard 3" x 5" packaging format.

Fanless operation power is 320W up to +50°C and 450W at +65°C with fan. Thus you can power your medical device in a quiet and hygienic way as you don't need to run a fan to cool down the power supply. High reliability is provided by use of industrial quality grade components and an excellent thermal management. It makes the products an ideal solution for medical devices and for demanding safety and space critical applications.

Open-frame version see TPP 450A Series



www.tracopower.com/overview/tpp450a

Models

Order Code	Output Power (max.)	Output Voltage (adj. ±8%)	Output Current (max.) *1	Efficiency (typ.)
TPP 450-112-M	450 Watt	12 VDC	37.5 A	91 %
TPP 450-115-M		15 VDC	30.0 A	92 %
TPP 450-124-M		24 VDC	18.75 A	93 %
TPP 450-136-M		36 VDC	12.5 A	93 %
TPP 450-148-M		48 VDC	9.4 A	94 %

Options

on demand (backorder with MOQ, non stocking items)	– for version with fan on top suffix -M has to be replaced by -MB1 – model with 28 VDC / 16.1 A available – model with 53 V / 8.55 A available
--	--

*1 While fan is running

Input Specifications

Input voltage range	– AC range (universal input) – DC range – Power derating at low input voltage	85 – 264 VAC (47 – 63 Hz) 120 – 370 VDC 1.33 %/V below 100 VAC
Input current at full load	– at 100 VAC – at 240 VAC	5.8 A max. 2.4 A max.
Input protection	– Internal fuse in line and neutral	T 6.3 A / 250 VAC
Zero load power consumption (acc. ErP directive)	12 VDC models: other output models:	0.4 W typ. 0.8 W typ.
Leakage current	– at 264 VAC	100 µA max.
Power factor		0.95 min. (active power correction)

Output Specifications

Voltage set accuracy	– at 230 VAC	± 1%
Output voltage adjustment		± 8% (by trim potentiometer)
Regulation	– Input variation (85 - 264 VAC) – Load variation (0 - 100%)	0.2% max. 0.5% max.
Minimum load		not required
Temperature coefficient		0.02 %/K max.
Hold-up time	– at 115 VAC	14 ms typ.
Start-up time		2 s max.
Rise time		30 ms typ.
Ripple and noise (20 MHz Bandwidth)	12 VDC model: 15 VDC model: 24 VDC model: 28 VDC model: 36 VDC model: 48 VDC model: 53 VDC model:	250 mVp-p typ. (w. cap. 1µF/25V 1206 X7R MLCC) 300 mVp-p typ. (w. cap. 1µF/25V 1206 X7R MLCC) 240 mVp-p typ. (w. cap. 1µF/50V 1206 X7R MLCC) 280 mVp-p typ. (w. cap. 1µF/50V 1206 X7R MLCC) 360 mVp-p typ. (w. cap. 1µF/50V 1206 X7R MLCC) 480 mVp-p typ. (w. cap. 1µF/50V 1206 X7R MLCC) 530 mVp-p typ. (w. cap. 0.1µF/100V 1206 X7R MLCC)
Transiente response	– Peak deviation (50 - 75% load change) – Recovery time	3% Vout typ. 600 µs typ.
Overvoltage protection (Featured by main power output)		110 – 135% of Vout (latch mode)
Overload protection (Featured by main power output and standby power output)		115 – 150% of Iout max. (current limitation)
Short circuit protection (Featured by all outputs)	– Protection level 1 (nominal) – Protection level 2 (instantaneous high current)	continuous, automatic recovery (hiccup mode) latch
Auxiliary outputs	– Power source for fan (variable fan speed control) – Standby power source	12 VDC / 500 mA max. Refers to pin +Fan and –Fan 5 VDC / 2000 mA max. Refers to pin +Standby and –Standby
Capacitive load	12 VDC model: 15 VDC model: 24 VDC model: 28 VDC model: 36 VDC model: 48 VDC model: 53 VDC model:	31'250 µF max. 20'000 µF max. 7'820 µF max. 5'750 µF max. 3'500 µF max. 1'960 µF max. 1'600 µF max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.