



SinglFuse™ SF-2410FPxxxW Series Features

- Single blow fuse for overcurrent protection
- 6125 (EIA 2410) footprint
- Fast acting precision
- UL 248-14 listed
- RoHS compliant* and halogen free**
- Wire core SMD design
- Surface mount packaging for automated assembly

SF-2410FPxxxW Series - Fast Acting Precision Wire Core Surface Mount Fuses

Electrical Characteristics

Model	Rated Current (Amps)	Fusing Time	Resistance (Ω) Typ.***	Rated Voltage	Interrupting Rating	Typical I^2t (A ² s) ****
SF-2410FP050W-2	0.50	Open within 5 sec. at 200 % rated current	0.231	AC 250 V DC 125 V	AC 250 V 100 A DC 125 V 50 A DC 32 V 300 A	0.10
SF-2410FP063W-2	0.63		0.174			0.16
SF-2410FP075W-2	0.75		0.148			0.23
SF-2410FP100W-2	1.00		0.093			0.59
SF-2410FP125W-2	1.25		0.070			0.96
SF-2410FP150W-2	1.50		0.062			1.19
SF-2410FP200W-2	2.00		0.042			2.75
SF-2410FP250W-2	2.50		0.031			1.21
SF-2410FP300W-2	3.00		0.0249	AC 125 V DC 125 V	AC 125 V 50 A DC 125 V 50 A DC 32 V 300 A	1.73
SF-2410FP315W-2	3.15		0.0232			2.20
SF-2410FP350W-2	3.50		0.022			2.50
SF-2410FP400W-2	4.00		0.0172			4.10
SF-2410FP500W-2	5.00		0.0143			5.90
SF-2410FP630W-2	6.30		0.010			12.50
SF-2410FP700W-2	7.00		0.0094			14.20
SF-2410FP800W-2	8.00		0.0086			20.30
SF-2410FP1000W-2	10.00		0.0066		AC 125 V 35 A DC 125 V 50 A DC 32 V 300 A	29.20

*** Resistance value measured with $\leq 10\%$ rated current at 25 °C ambient.

**** Melting I^2t calculated at 0.001 second pre-arcing time.

Reliability Testing

No.	Test	Requirement	Test Condition	Test Reference
1	Reflow and bend	DCR change $\leq 20\%$ ($\leq 10\%$ for ≤ 1 A) No mechanical damage	3 reflows at 245 °C followed by a 2 mm bend	Refer to STP document
2	Solderability	Minimum 90 % coverage	One dip at 245 °C for 5 seconds	MIL-STD-202 Method 208
3	Soldering heat resistance	DCR change $\leq 20\%$ ($\leq 10\%$ for ≤ 1 A) New solder coverage $\leq 75\%$	One dip at 260 °C for 10 seconds	MIL-STD-202 Method 210
4	Moisture resistance	DCR change $\leq \pm 15\%$ No excessive corrosion	10 cycles	MIL-STD-202 Method 106
5	Salt spray	DCR change $\leq \pm 10\%$ No excessive corrosion	48 hour exposure, 5 % salt solution	MIL-STD-202 Method 101
6	Mechanical vibration	DCR change $\leq \pm 10\%$ No mechanical damage	0.4 inch D.A. or 30 G between 5-3000 Hz	MIL-STD-202 Method 204
7	Mechanical shock	DCR change $\leq \pm 10\%$ No mechanical damage	1500 G, 0.5 ms, half-sine shocks	MIL-STD-202 Method 213
8	Thermal Shock	DCR change $\leq \pm 10\%$ No mechanical damage	100 cycles between -65 °C and +125 °C	MIL-STD-202 Method 107
9	Life	No electrical "opens" during testing Voltage drop change shall be less than $\pm 20\%$ of initial value	80 % rated current (75 % for < 1 A fuses) for 2000 hours at ambient temperature +25 °C	Refer to STP document

* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

** Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less;

(b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

"SinglFuse" is a trademark of Bourns, Inc.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

SinglFuse™ SF-2410FPxxxW Series Applications

- LCD / LED TVs
- White goods
- PC servers
- LCD monitors
- DC/DC converters
- DC/AC inverters
- Notebooks / ultrabooks
- Telecom systems
- Chargers

SF-2410FPxxxW Series - Fast Acting Precision Wire Core Surface Mount Fuses


BOURNS®

Environmental Characteristics

Operating Temperature..... -55 °C to +125 °C
 Storage Conditions
 Temperature +5 °C to +35 °C
 Humidity..... 40 % to 75 %
 Shelf Life..... 2 years from manufacturing date
 Moisture Sensitivity Level 1
 ESD Classification (HBM)..... Class 6

Typical Part Marking

Represents total content. Layout may vary.



RATED CURRENT (A)
 C = 0.50 K = 3.00
 S = 0.63 V = 3.15
 D = 0.75 L = 3.50
 E = 1.00 M = 4.00
 F = 1.25 N = 5.00
 G = 1.50 O = 6.30
 I = 2.00 P = 7.00
 J = 2.50 R = 8.00
 Q = 10.0

How to Order

SF - 2410 FP 100 W - 2


SinglFuse™
 Product Designator _____
 SMD Footprint _____
 2410 = 6125 (EIA 2410) size
 Fuse Blow Type _____
 FP = Fast Acting Precision
 Rated Current _____
 050 ~ 1000 (0.50 A ~ 10.00 A)
 Structure Type _____
 W = Wire Core
 Packaging Type _____
 - 2 = Tape & Reel

Agency Recognition

UL File Number E198545

<http://www.ul.com/> Follow link to Online
 Certificates Directory,
 then enter UL File No.
 E198545, or [click here](#)



Construction

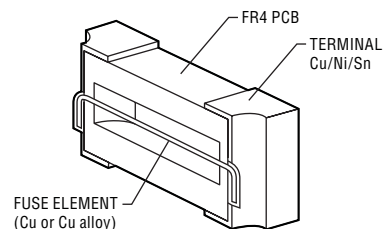

Packaging Quantity


2,000 pieces per 7-inch reel

Product Dimensions

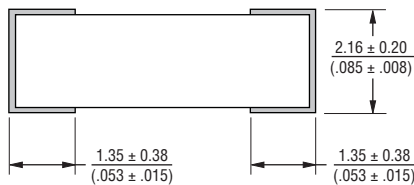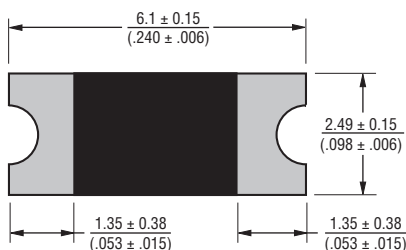

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Recommended Pad Layout

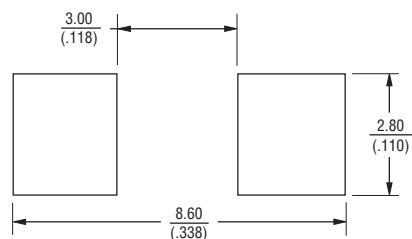

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.