



Dimensions—mm

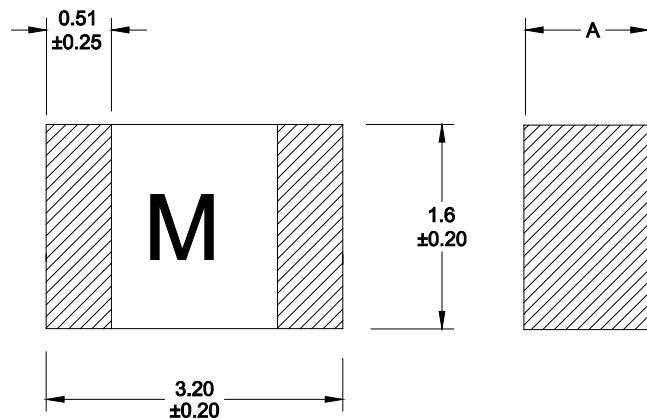


Dimension A	
250 mA to 500 mA	750 mA to 30 A
0.89 +0.20/-0.15	0.65 +0.20/-0.15

Recommended Pad Layout

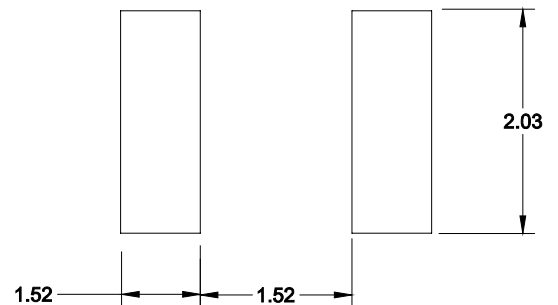

Packaging information- mm

Supplied in tape and reel packaging, 3000 parts per 7" diameter reel.

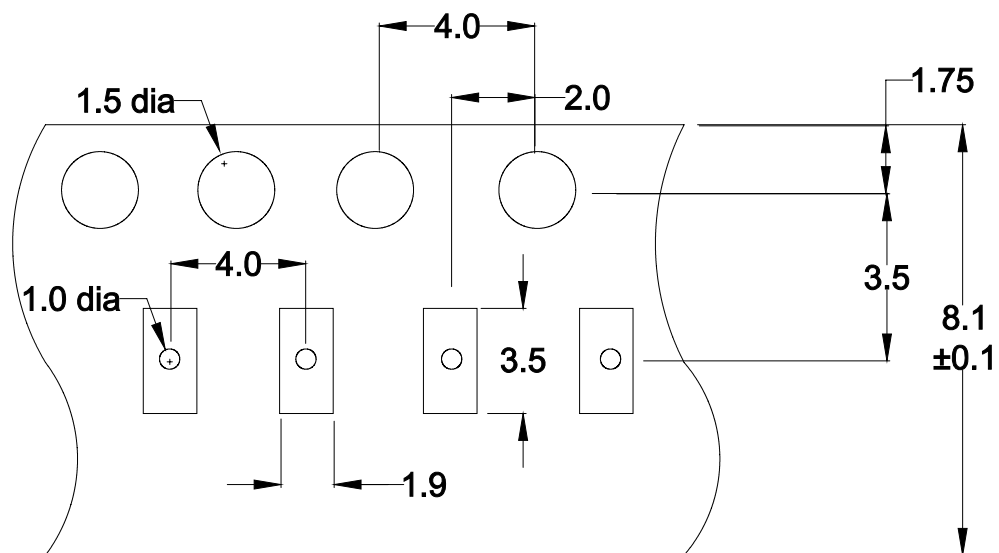

User Direction of Feed →

I²t vs. time curve

