



Input Voltage Derating

Figure. 1

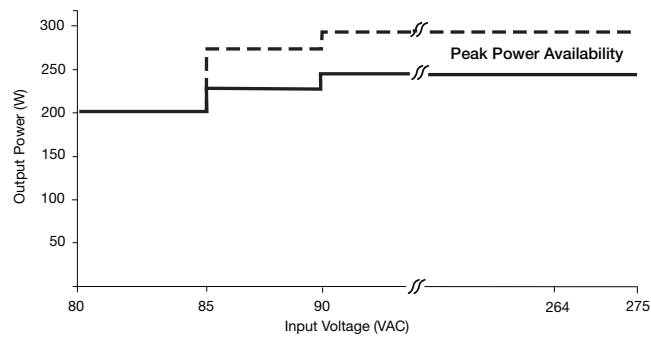


Start Up Delay From AC Turn On

Figure. 2
V1 & V2 start up example
from AC turn on (490 ms)

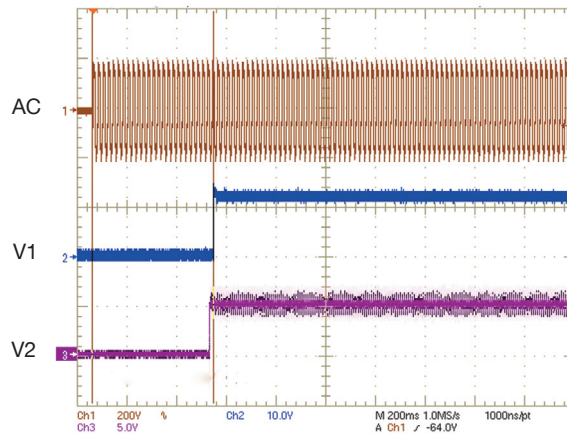

Hold Up Time From Loss of AC

Figure 3
V1 hold up example at 250 W load
with 90 VAC input (43 ms)

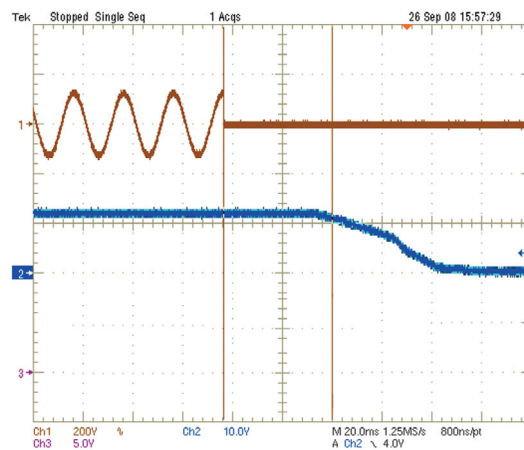

Output Ripple & Noise

Figure 4
V1 CCM250PS12 (full load)
86 mV pk-pk ripple. 20 MHz BW


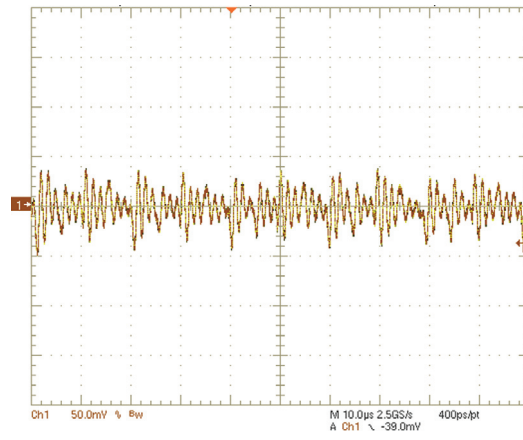


Figure 5
V1 CCM250PS24 (full load)
84 mV pk-pk ripple. 20 MHz BW



Output Overload Characteristic

Figure 6
Typical V1 Overload
Characteristic
(CCM250PS12 shown)

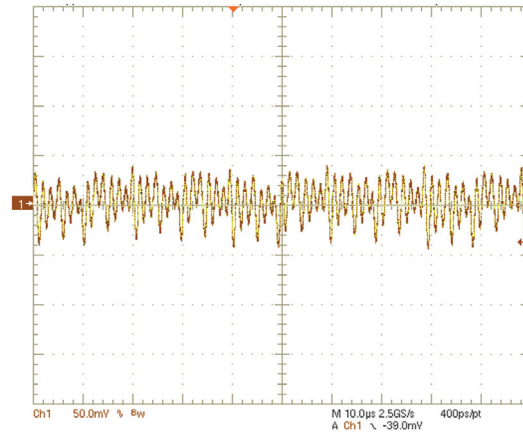